



www.quattrobi.net



lighting designed and made in italy

2022.01

www.quattrobi.net



Edition 2022.01

2

QUATTROBI

Index

The Company	6
Production	8
Case history	26
Datasheets	29



Quattrobi Inc.
420 Columbus Ave, Ste. 304
Valhalla NY 10595

Federal TAX ID: 89 - 3547766
P: **347 613 5772**

www.quattrobi.net
E: info@quattrobi.net

Art Direction **Enrico Corelli**
Graphic design **Artur Dudka**
Photo **Alessandro Gaja** pages: 5, 8-25, **Massimiliano Biffi** pages: 28, 29, 34-89

"Ho fondato Quattrobi con coraggio e passione, gli stessi valori che porto avanti oggi con i miei figli."

Rino Biffi



The Company


Established in 1999 near Milan, Italy by Rino Biffi, Quattrobi took advantage of the long term experience of the founder in the world of lighting technology. Now the company is managed by the next generation to ensure continuity of the family business.

A state-of-the-art factory extends over an area of 64,000 sq.ft and is fully vertically integrated. In house metal parts bending, milling, aluminum extrusion cutting and powder coating are all available as standard. This allows Quattrobi to have short lead times and good flexibility in terms of customization.

Our company's mission is to design high performance and quality architectural lighting fixtures to fulfill the needs of the Architectural & Design community. Passion, commitment, and sustainability will always guide us in the development of high-performance lighting fixtures for all applications.



Production *Produzione*

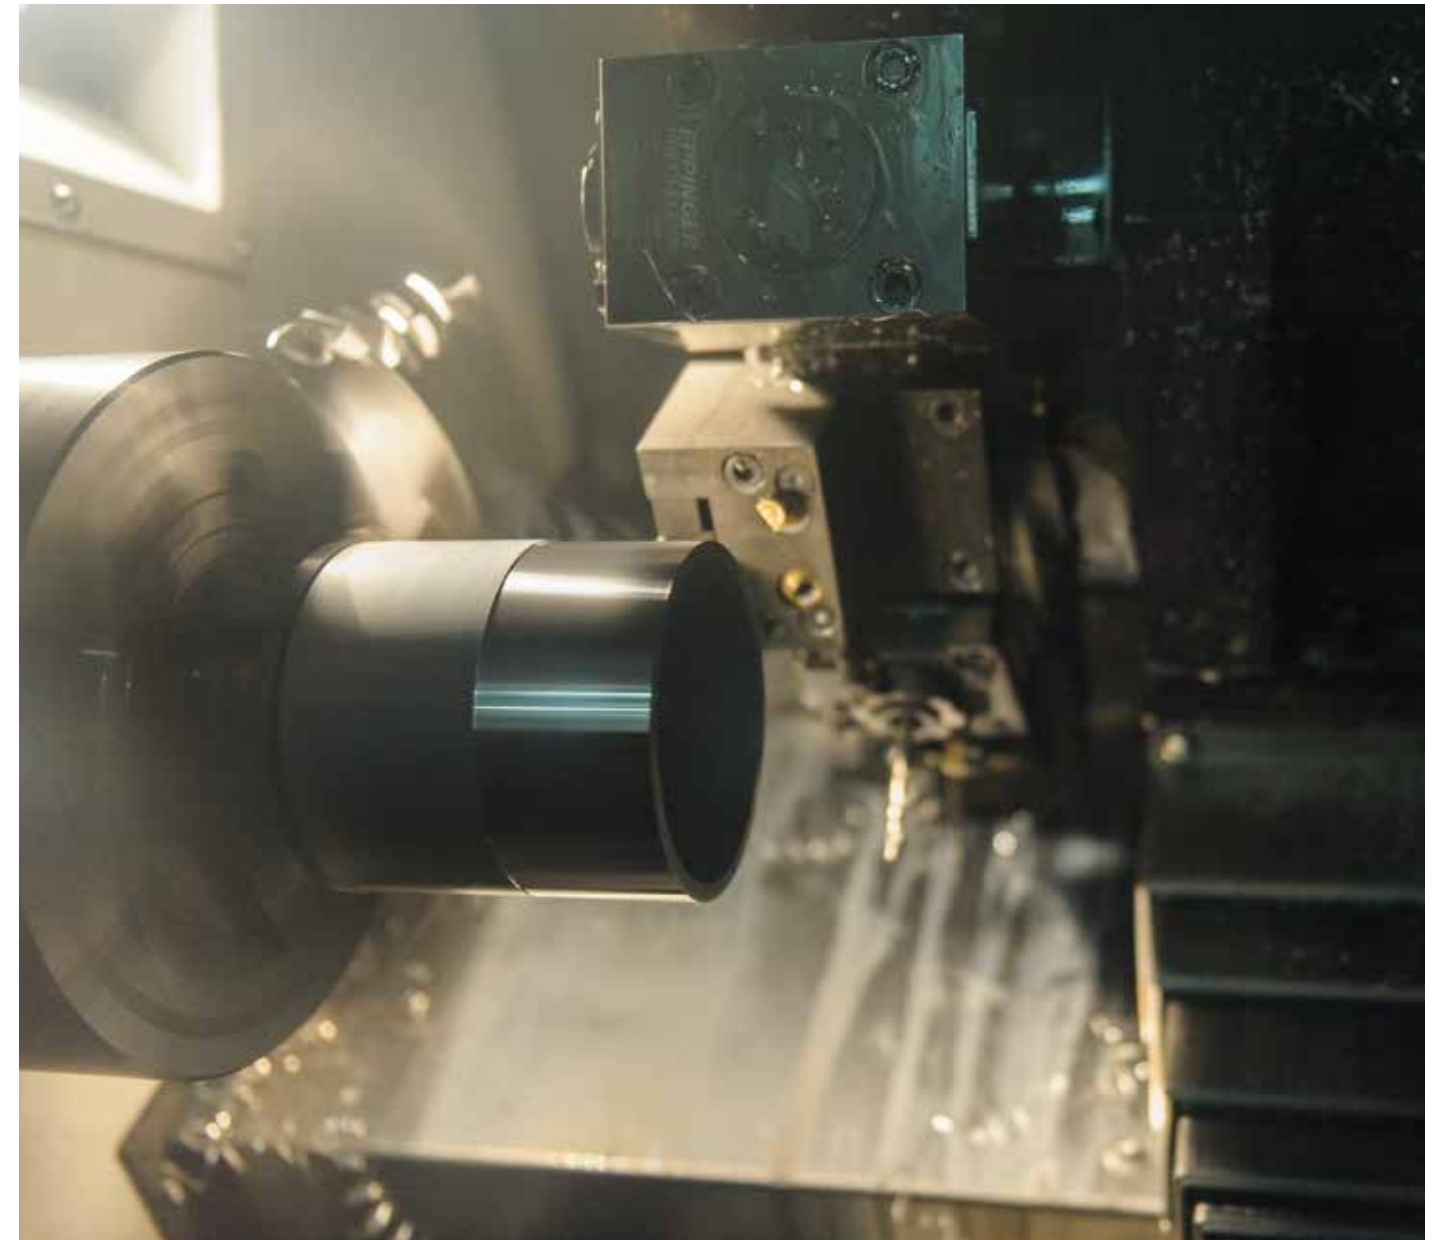

1. Lighting fixture housing while lathe machining (Kor)
Lavorazione al tornio del corpo lampada (Kor)
2. Cutting of the lighting fixture housing (Kor) from aluminum tube
Taglio del corpo lampada (Kor) da tubo in alluminio





1. Cleaning of the sink after the milling operation (Max)
Pulitura del dissipatore dopo l'operazione di fresatura (Max)
2. Milling of the heatsink (Max)
Fresatura del dissipatore (Max)

→





1. Deburring of parts (Max)
Molatura dei pezzi (Max)
2. TIG welding (Tungsten Inert Gas) (Max)
Saldatura a TIG (Tungsten Inert Gas) (Max)





Aluminum extrusions cutting (Max - Kor)
Taglio di estrusi di alluminio (Max - Kor)




1. Polishing of the lighting fixture body (Kor)
Lucidatura del corpo lampada (Kor)

2. Laser cutting of an 0.8mm thick iron plate
Taglio laser su lastra di ferro spessore 0,8mm





Components separation after the laser cutting (Kor)
Separazione dei componenti dopo il taglio laser (Kor)

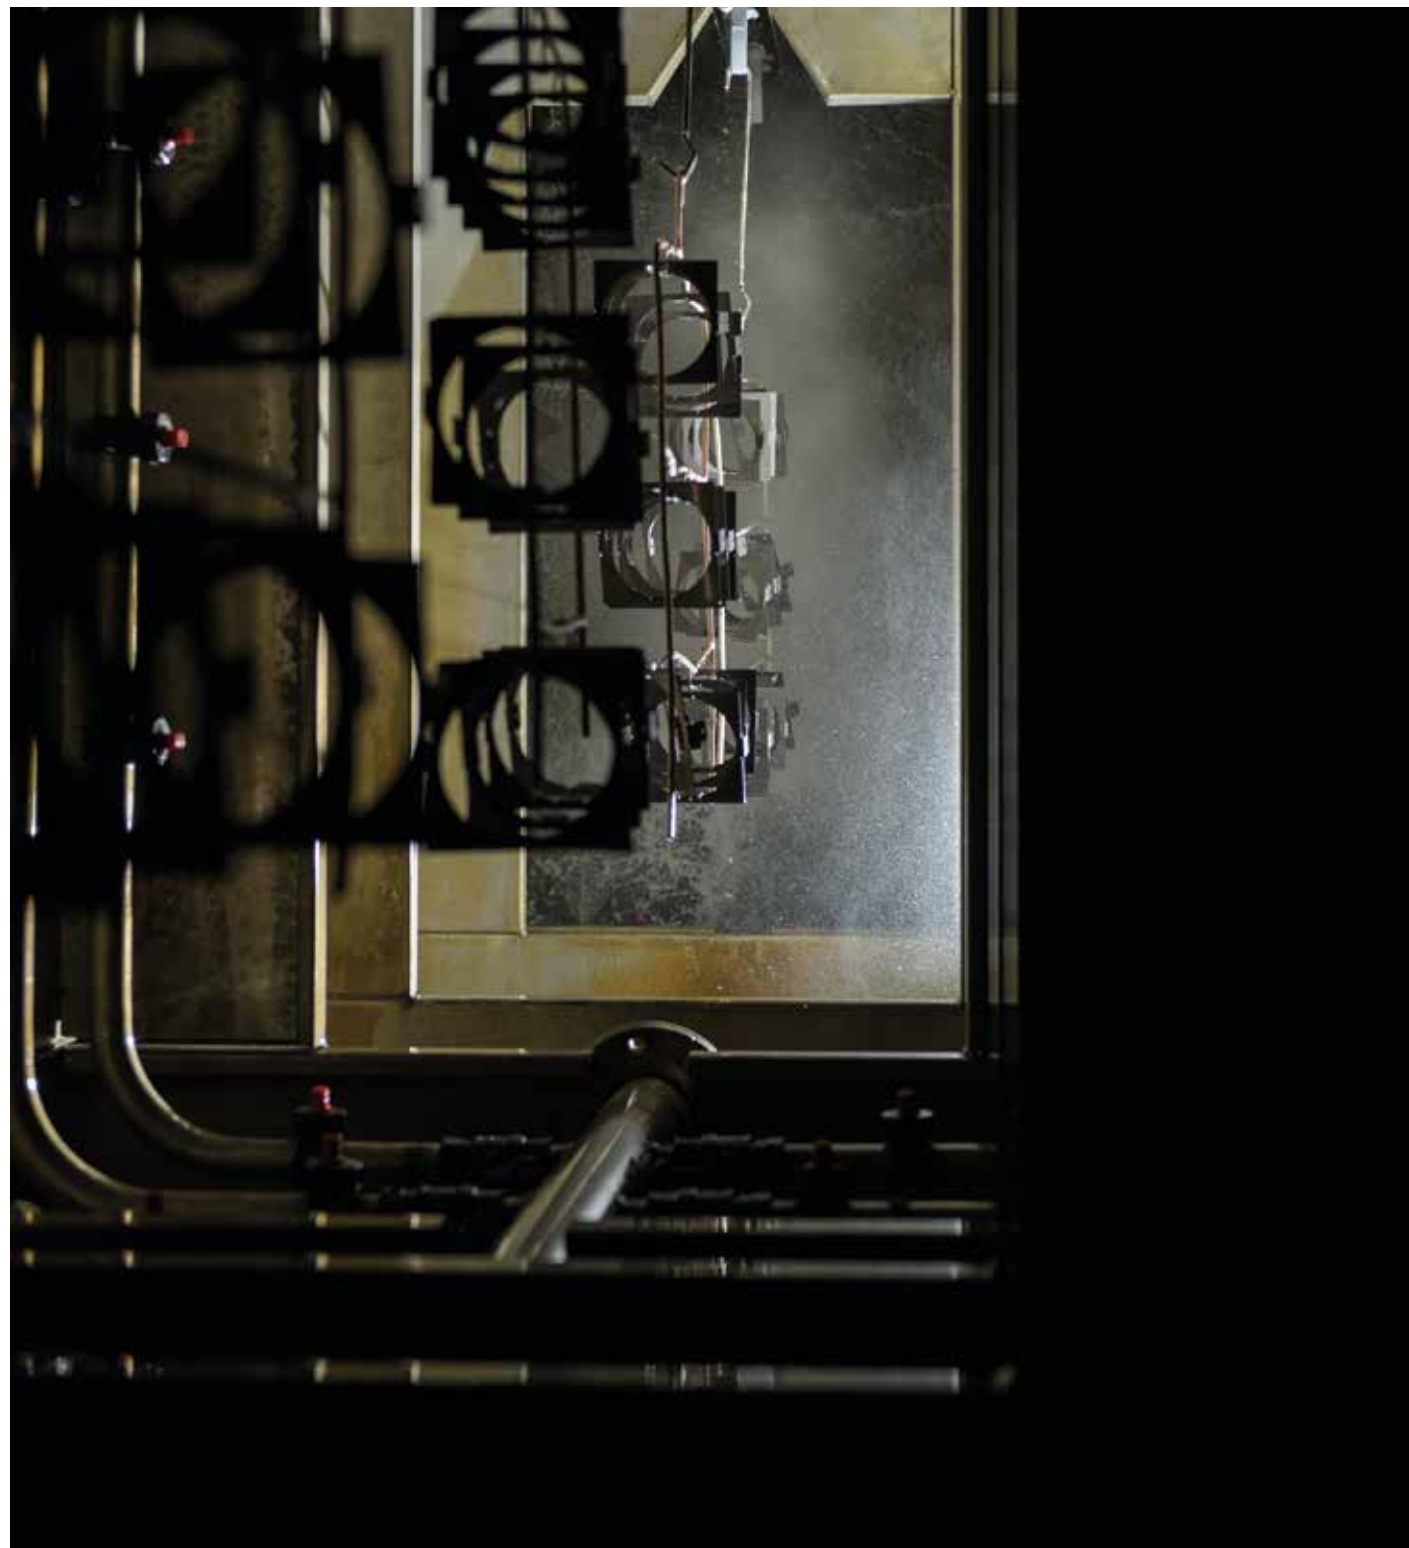

1. Degreasing operations for painting (Macroquadro)
Operazioni di sgrassaggio per la verniciatura (Macroquadro)

2. Powder coating finishing (Macroquadro)
Verniciatura a polvere rifinitura (Macroquadro)





1. Assembly line
Linea di montaggio
2. Powder coating. Preparation (Max - Kor)
Verniciatura a polvere. Preparazione (Max - Kor)





Case history | HK

Luca Racioppo, tells his experience about working with Quattrobi on the making of HK, a special product designed by him.

How was Project HK born?

Like all good ideas it was born spontaneously.
During one of my many journeys, in this case to Hong Kong.
It was conceived from a deliberately simple concept.
To create a technical device, with design.
To bring functionality in its shape.
Make the soul of a light fitting light itself.

How did the relationship with Quattrobi start?


With a very interesting project.
With curiosity and patience.
With a common vision.
With the right experience and resourcefulness.
With a little bit of luck.

The heat sink is the element, why?


The heat sink is the soul of the light.
It controls the heat.
This being necessary and indispensable to ensure light.
Already it exists.
Already it works.
As with one being naked.
No tricks. Nothing is covered up. Everything is honest and functional.

The new projects?

Without reinventing anything just using what already exists in its best form.
There will be new products for new markets where Quattrobi are constantly evolving.
As are the ideas.

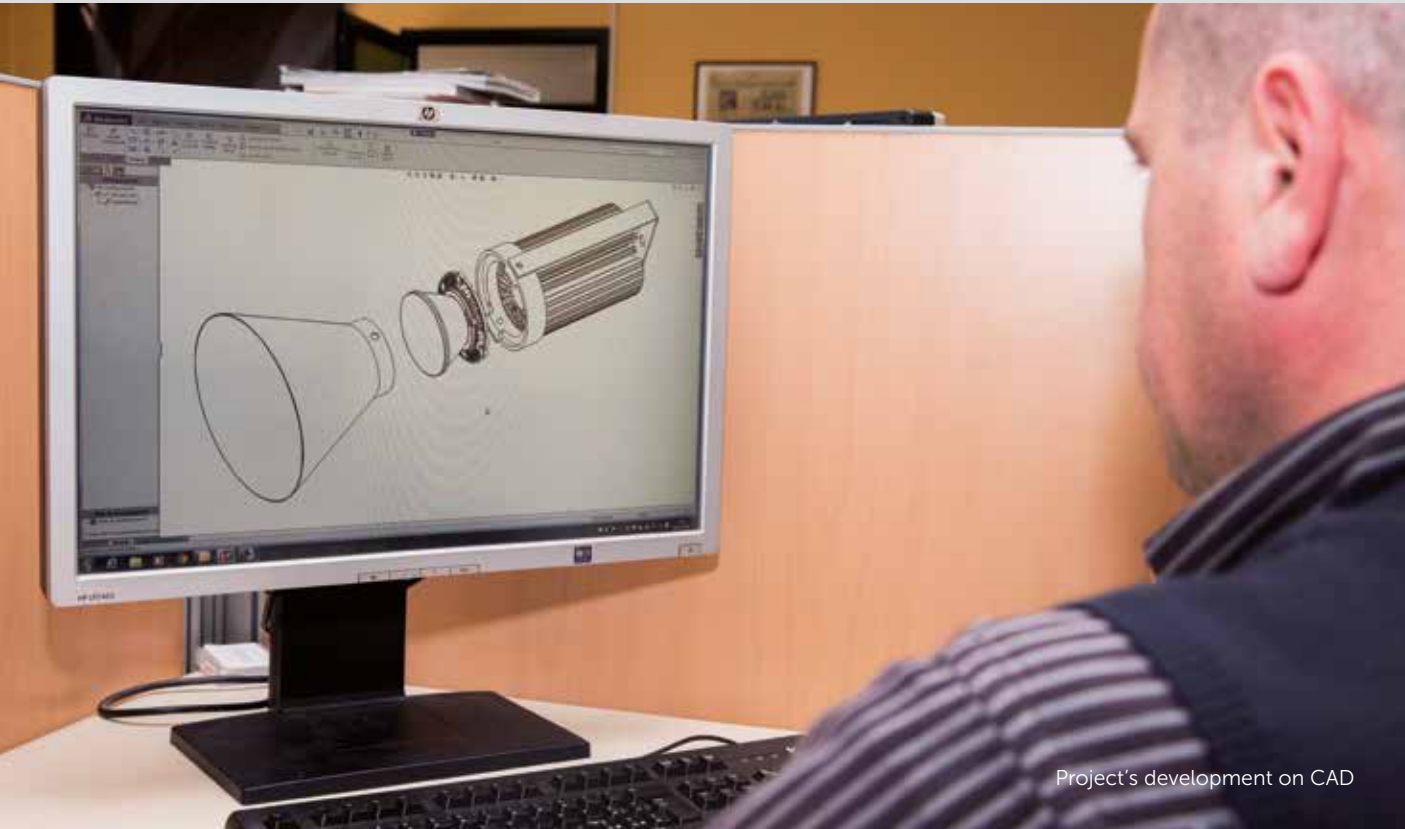

Project's development on CAD

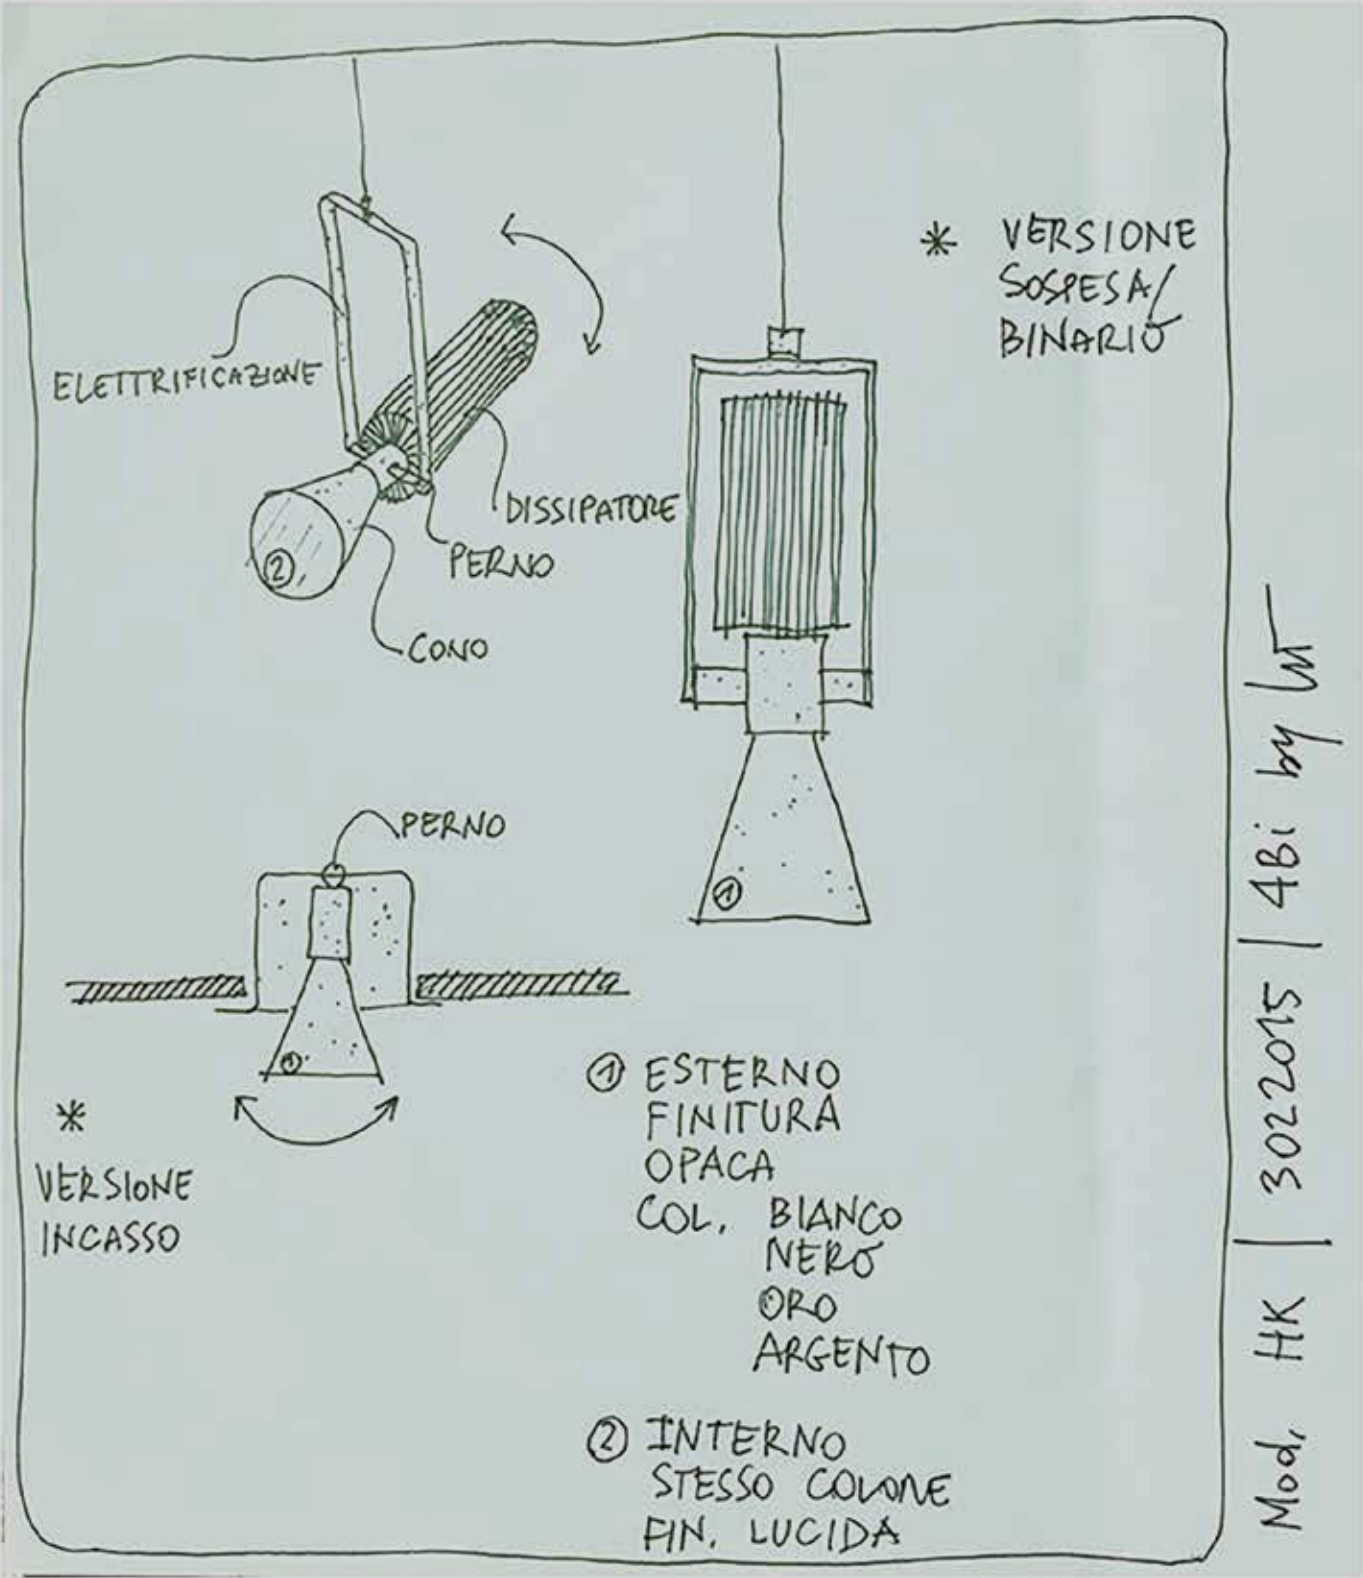

Luca Racioppo ARCHITECT, Milan, 1978



Datasheets

AX60	30		
AX76	34		
AX95	36		
FLY	40		
HK	42		
KOR	44		
KOR FLS	52		
MISSING	70		
INNER	76		
MAX	82		
MINI MAX	84		
PHOTO	88		
SAM 95	94		
SPINNER	98		
SUNLIGHT	102		
SMOKE	148		
INK	158		
MINI INK	160		
SAM LINE VOLTAGE	162		
MAGNETO	166		
MAGNETO LINE	180		
MAGNETO TRACK	196		
²BE	200		
LINEA DI LUCE	206		
TRACK	230		




AX60

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0- 10 V dimming 1%

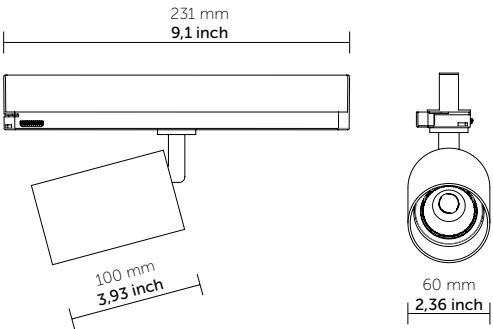

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX101 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°
For dry location

For dry location 

AX102 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
AX101 15W120V AX102 22W120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **AX101 S 8030 M 01**



MARTINI
WUNDERKAMMER

L'ALTARE DELLE
MERAVIGLIE
THE CABINET OF CURIOSITIES

Il Martini è un aperitivo che ha accompagnato la storia dell'umanità per secoli. È un drink che ha attraversato epoche e culture, diventando un simbolo di eleganza e raffinatezza. In questo cabinet of curiosities, abbiamo raccolto alcuni degli oggetti più preziosi e curiosi che hanno fatto parte della storia del Martini, dalla prima ricetta fino ai giorni nostri. È un viaggio attraverso il tempo e la cultura, un'occasione per scoprire le radici di un drink che ha fatto parte della vita di milioni di persone. È un'occasione per riflettere sulla bellezza e sulla ricchezza della nostra eredità culturale, e per apprezzare il ruolo del Martini nella storia dell'umanità.




AX76

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 22 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0- 10 V dimming 1%

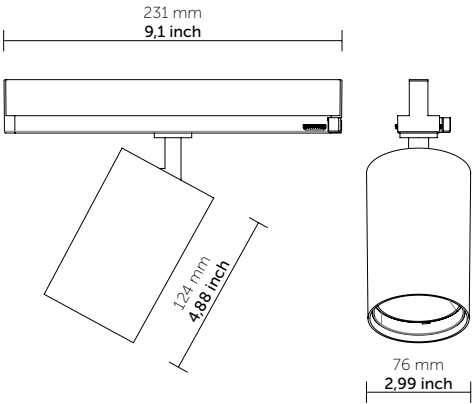

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX105 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

AX109 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

AX107 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
AX105 15W120V AX107 22W120V AX109 26W120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **AX105 S 8030 M 01**




AX95

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 22 - 26 - 30
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0- 10 V dimming 1%

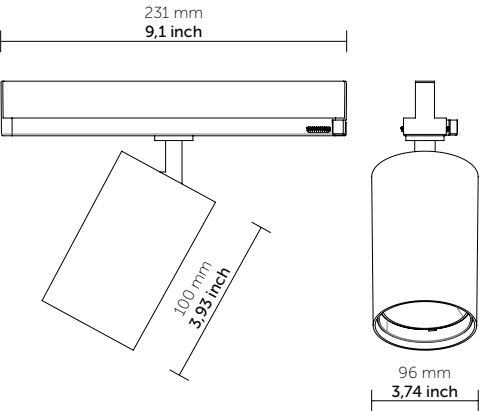

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX111 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

AX115 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

AX113 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

AX117 30W

2880 lm - 80 CRI – 3000K
2995 lm - 80 CRI – 4000K
2948 lm - 80 CRI – 3500K
2439 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
AX111 15W120V AX113 22W120V AX115 26W120V AX117 30W120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **AX111 S 8030 M 01**






FLY

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 22	
Light beam (°)	Spot - Medium - Wide	
Installation	Track ; G version Global(*) GES compatible ; X version -	Global (*) XTS compatible
Luminaire housing	Extruded aluminium	
Protective screen	Polycarbonate	
Light sources	LED	
Finishing	White, Grey, Black, Custom powder coat	
Power supply	Electronic constant current LED driver, 120V 60Hz	
Dimming	Phase cut dimming	



0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

FL101 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

For dry location 

FL103 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
FL101 15W120V FL103 22W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **FL101 G 8030 M 01**

Accessories

GA70

Adapter kit for ceiling installation - white, grey, black






HK

Design: LUCA RACIOPPO ARCHITECT

Track adjustable projector with LED lighting system. Optical unit with front louver polycarbonate. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible; X version - Global (*) XTS compatible
Luminaire housing	Drawn aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

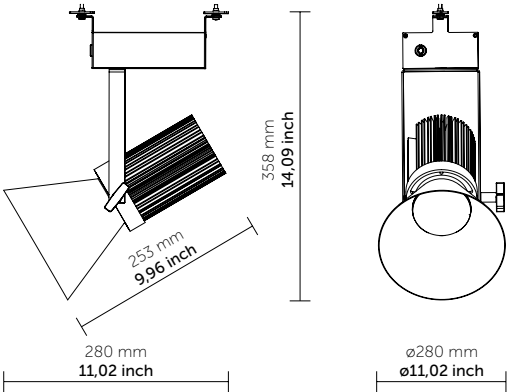

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

HK001 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 14°
M - Medium - 28°
W - Wide - 52°

HK005 40W

4550 lm - CRI 80 – 3000K
4736 lm - CRI 80 – 3500K
4800 lm - CRI 80 – 4000K
3880 lm - CRI 90 – 3000K

S - Spot - 20°
M - Medium - 35°
W - Wide - 64°

For dry location 

HK003 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 14°
M - Medium - 28°
W - Wide - 52°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
HK001 15W120V HK003 26W120V HK005 40W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **HK001 G 8030 M 01**




KOR

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 35	
Light beam (°)	Spot - Medium - Wide	
Installation	Track ; G version Global(*) GES compatible ; X version -	Global (*) XTS compatible
Luminaire housing	Aluminium alloys	
Protective screen	Tempered glass	
Light sources	LED	
Finishing	White, Grey, Black, Custom powder coat	
Power supply	Electronic constant current LED driver, 120V 60Hz	

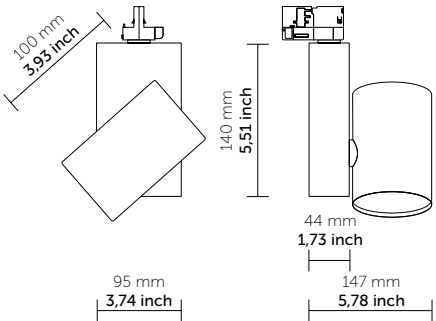

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

KR105 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR107 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location 

KR103 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°


Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
KR105 15W120V KR103 26W120V KR107 35W120V Phase cut dimming only KR107 on request	G Global(*) GES and GEK compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request


Ordering example : **KR105 G 8030 M 01**

Accessories

SA101
Directional louvers



SA201
Honeycomb filter



SA200
Honeycomb filter



SA300
Fresnel lens




SA400
Snoot



SA201 use only with SA101

GA70

Adapter kit for ceiling installation - white, grey, black







FOOD LED SYSTEM

Food LED System (FLS) is a high-performance LED system designed to beautifully light meat as well as seafood, fruits, vegetables, dairy and bakery products.

Food lighting

Lighting determines how the customer perceives the food on display, and the more a LED can enhance its colors, the more the product can look fresh and appealing.

A regular LED can usually enhance the colors of just one food type, so most of the time, you end up lighting each area of the store with a different LED.

What happens then is that a customer moving from one area to another most likely will experience unpleasant color shifts, from the pink tones of the meat area to the yellows of the bread area or the blues of the fish area.

And changing store layout becomes an overly complicated process, especially when you have to identify many different LEDs and reposition them according to food type.


One for all

Our system is a paradigm shift in how food lighting is done.

We designed a high-performance LED that can enhance the colors of all food types and enables you to have one lighting solution for the entire store.

Food LED System (FLS) is the perfect one-for-all solution for food lighting.

High performance

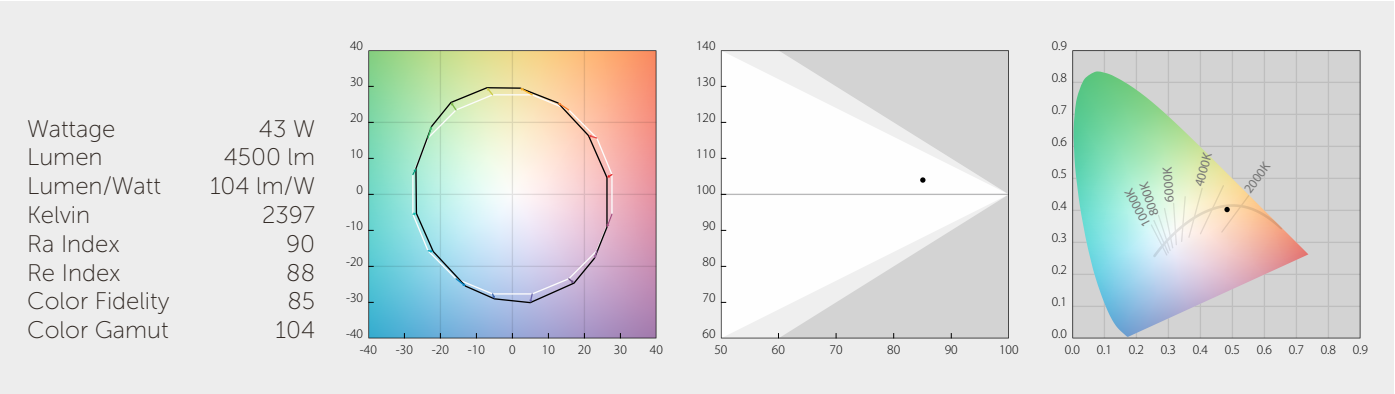

White point

Our high-performance LED has a Color Temperature of 2400 K with a pure White Point, very close to its theoretical values. While regular LEDs with the same Color Temperature often have a White Point deviated towards yellow.

Facility management

Our system makes facility management easier than before since you have to keep track of just one Quattrobi Product Code throughout all your documentation.

And when you need to change store layout, you no longer have to identify many different LEDs and reposition them according to food type. You already have our high-performance LED in every area, and it can enhance the colors of all food types.






KOR FLS

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with FOOD LED SYSTEM, the perfect one-for-all solution. Suitable for indoor applications such as supermarkets and food retail spaces.

FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global (*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

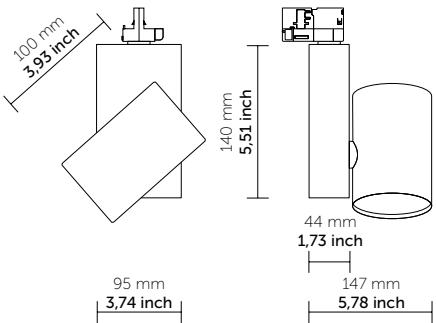

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

KR105 15W

1000 lm - 90 CRI - 2400 K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR107 35W

2550 lm - 90 CRI - 2400 K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location 

KR103 26W

1560 lm - 90 CRI - 2400 K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
KR105 15W120V KR103 26W120V KR107 35W120V Phase cut dimming only KR107 on request	G Global(*) GES and GEK compatible X Global(*) XTS compatible	9024 90CRI/2400K	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **KR105 G 8030 M 01**

* Available with other Quattrobi products on request



FOOD LED SYSTEM

- one-for-all solution
- enhance every color
- warm light and bright white
- lighting uniformity between store areas
- high-end performance







KOR

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trim adjustable projector with LED lighting system.
Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Complete with housing. IC rated.

FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

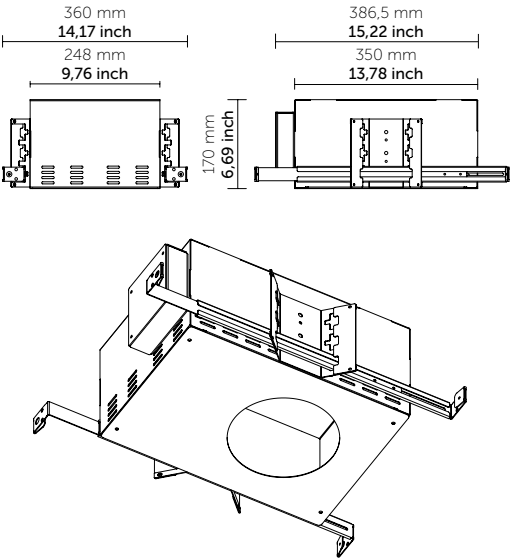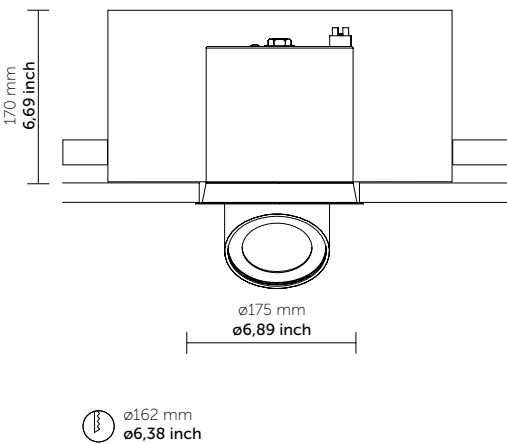

0° - 45° vertical tilting / 355° horizontal rotation

KR109 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR110 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Type IC

For dry location 

Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR109 15W120V KR110 26W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **KR109 8030 M 01**





KOR single light


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

Head details dimension:

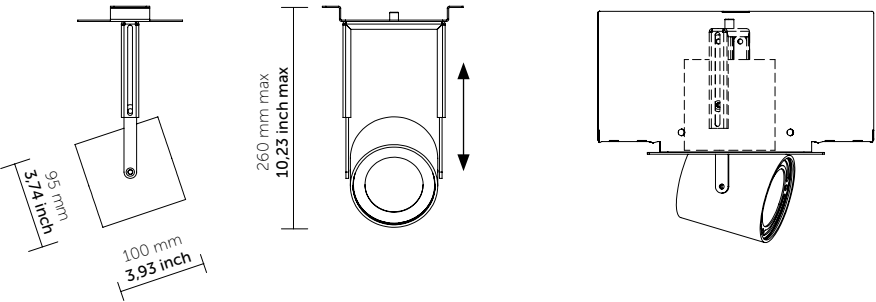

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm – CRI 90 – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location 

KR127 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering head info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**KR125 8030 M 01**

Ordering info recessed box see page 182



KOR double light


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

Head details dimension:

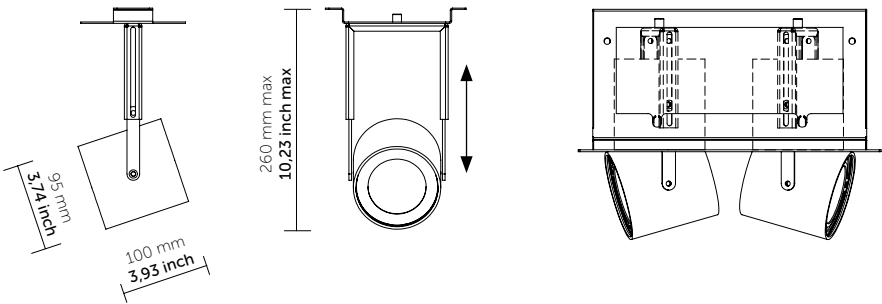

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm – CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

For dry location 

KR127 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering head info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Head: ordering example :**KR125 8030 M 01**

Head: ordering example multiple beams:
head 1 code **KR125 8030 M 01** qty 1 pcs;
head 2 code **KR129 8030 S 01** qty 1 pcs;

Ordering info recessed box see page 182



KOR triple light


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

Head details dimension:

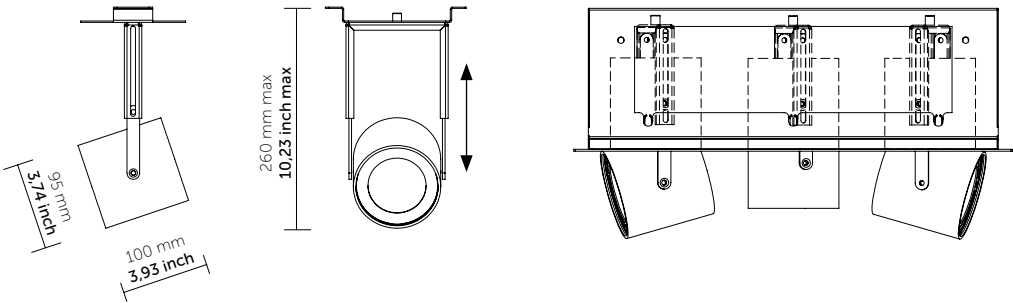

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm – CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

For dry location 

KR127 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°


Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request


Head: ordering example: **KR125 8030 M 01**

Head: ordering example multiple beams:
head 1 code **KR125 8030 M 01** qty 1 pcs;
head 2 code **KR129 8030 S 01** qty 1 pcs;

Ordering info recessed box see page 182

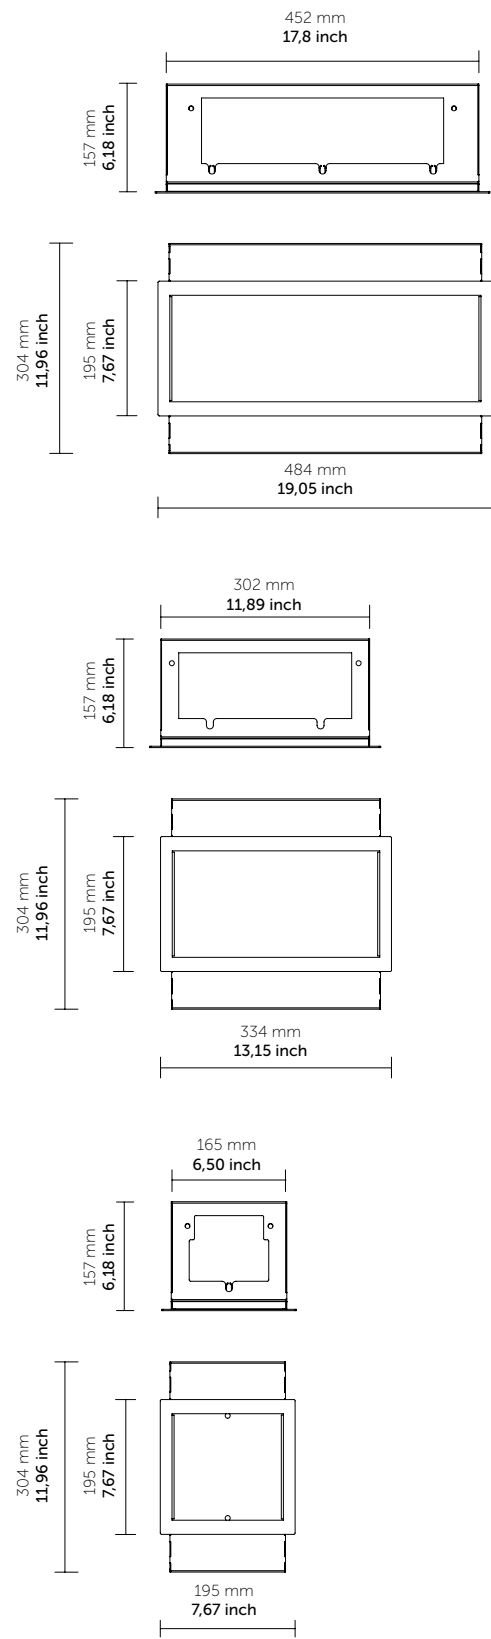

EX. RECESSED BOX + BAR HANGERS




RECESSED BOX

KR000 for triple light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 




465 mm
A= 18,30 inch

KR222 for double light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 




315 mm
A= 12,40 inch







KR111 for single light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 



175 mm
A= 6,88 inch

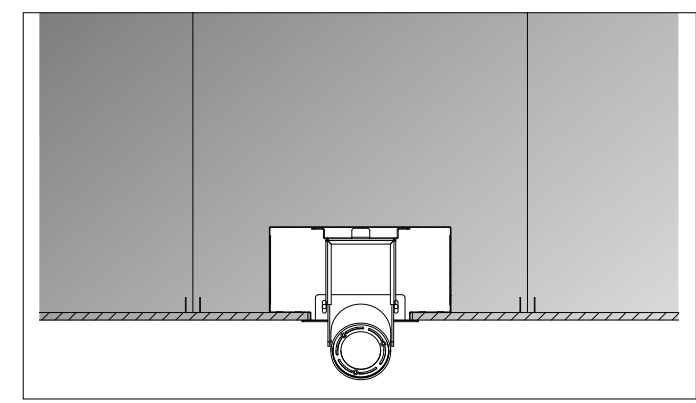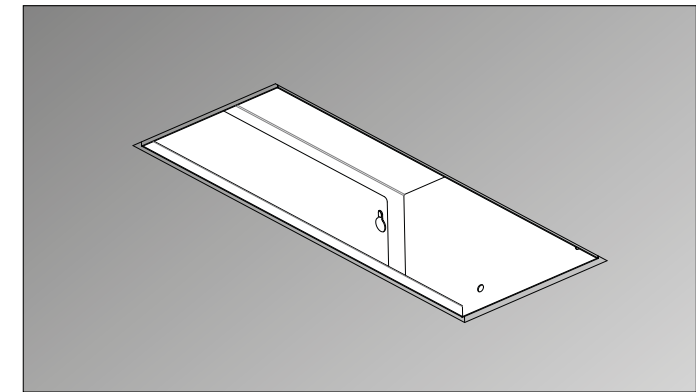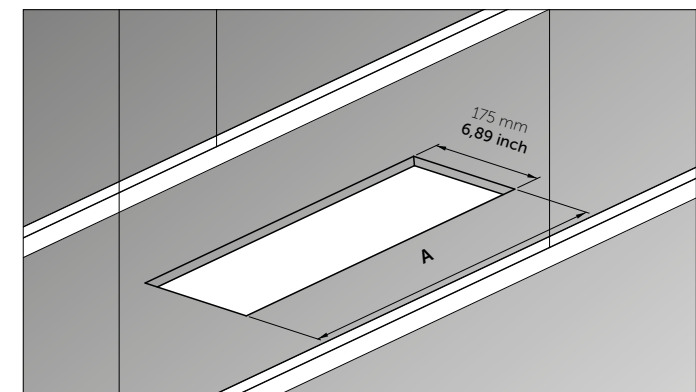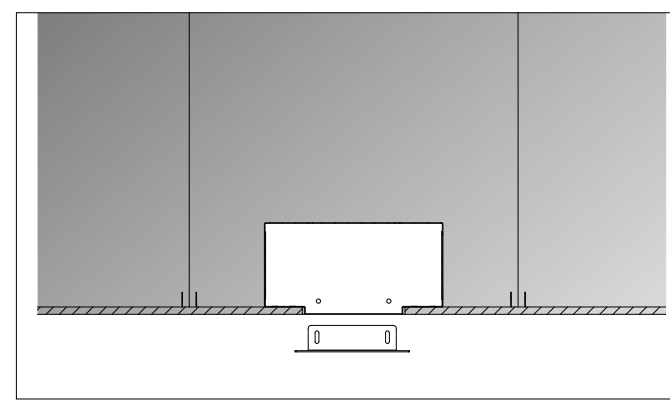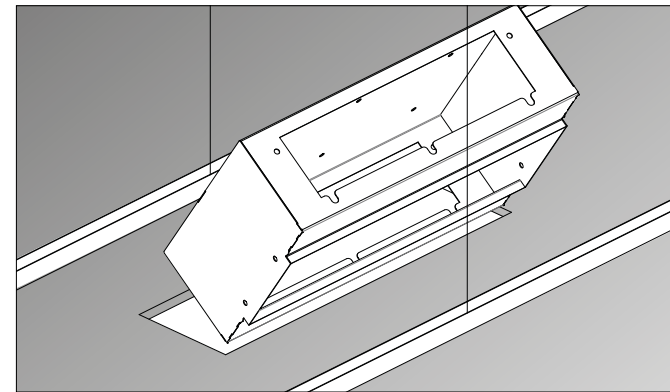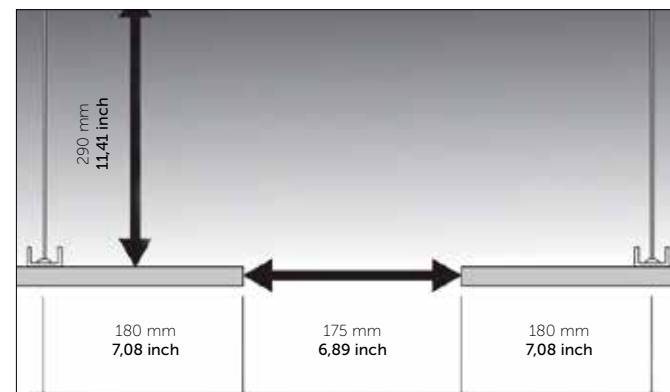


Ordering box info

Model	Finish
----	--
KR000 triple light	01 white
KR222 double light	02 black
KR111 single light	18 grey
	Other on request

Ordering recessed box example: **KR000.01**

KRBAR N°2 BAR HANGERS

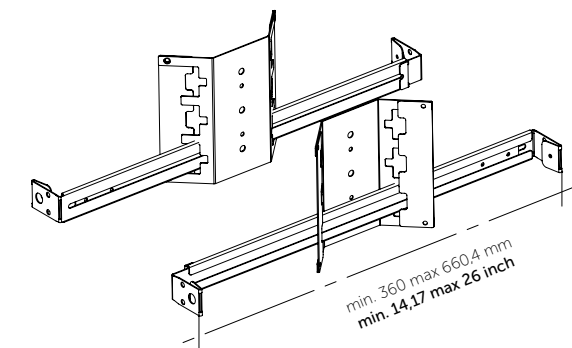





MISSING light


Design: QUATTROBI TECHNICAL DEPARTMENT

Lighting system: Adjustable LED projector with electronic driver, optical unit with front tempered glass protective screen.

FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

Head details dimension:

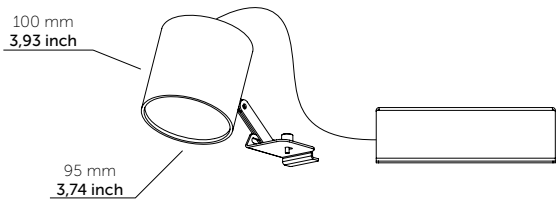

0° - 90° vertical tilting / 355° horizontal rotation

MS3521 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

MS3525 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm – CRI 90 – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location 

MS3523 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
MS3521 15W120V	8030 80CRI/3000K	S Spot	01 white
MS3523 26W120V	8035 80CRI/3500K	M Medium	02 black
	8040 80CRI/4000K	W Wide	18 grey
MS3525 35W120V	9030 90CRI/3000K		
0-10V dim on request	Other on request	Other on request	Other on request

Ordering example : **MS3521 8030 M 01**





MISSING
Recessed linear module



Design: QUATTROBI TECHNICAL DEPARTMENT

Linear modular system for LED lighting system. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Ceiling Cut-out

220 mm
8,66 inch
4,5 mm
A+ 0,18 inch





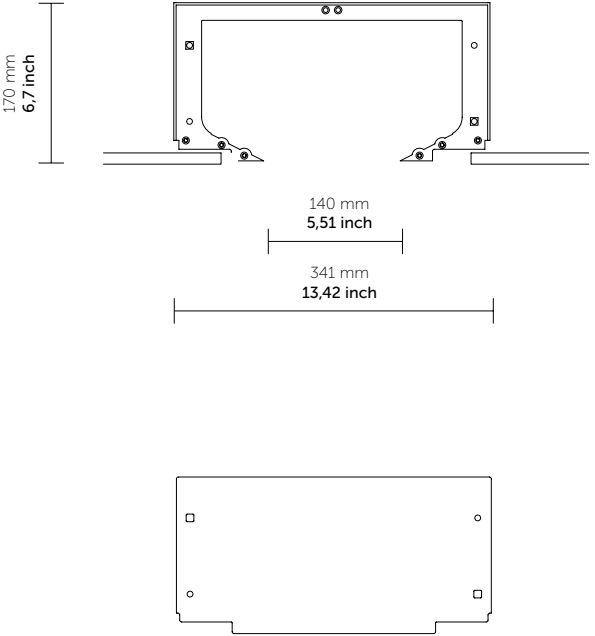
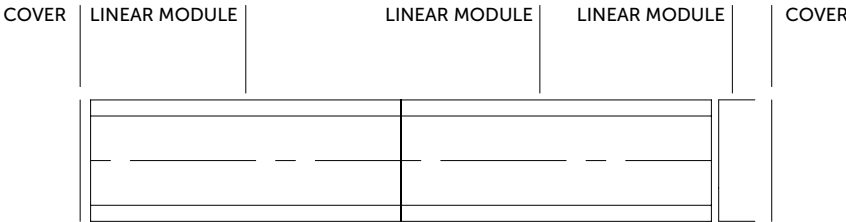


LINEAR MODULE

Model	A
MS3511	5,90"/150mm
MS3512	11,81"/300mm
MS3518	47,24"/1200mm

TYPE NON IC
For dry location 

MS3500 - 2 covers for Missing module
For dry location 

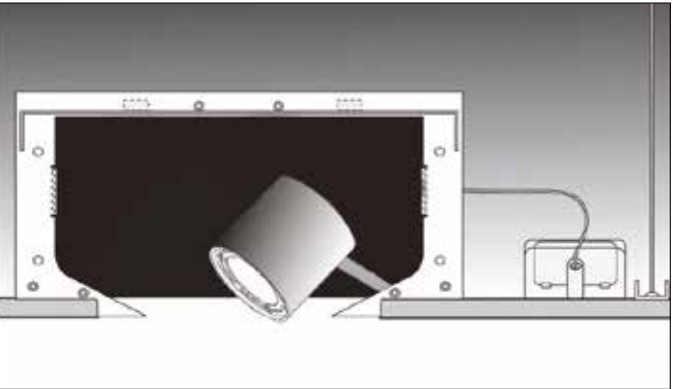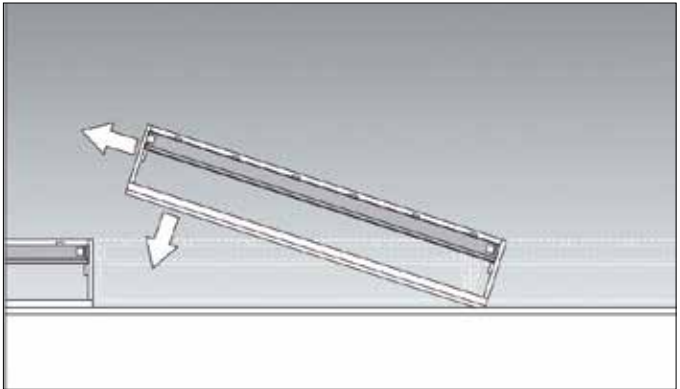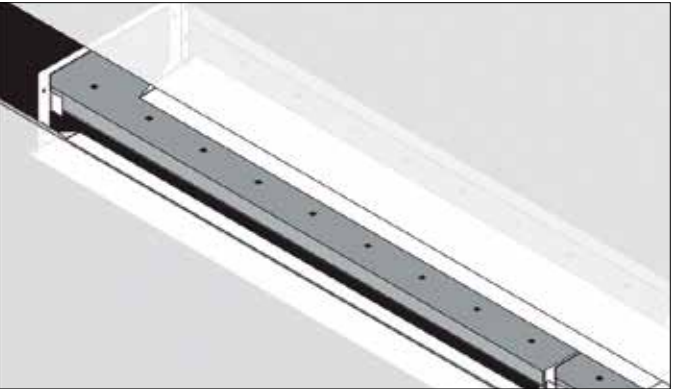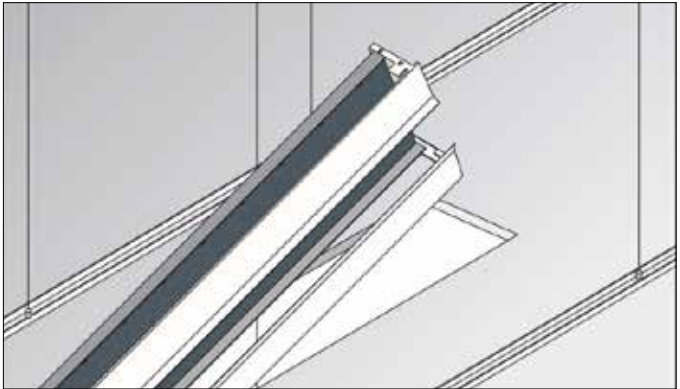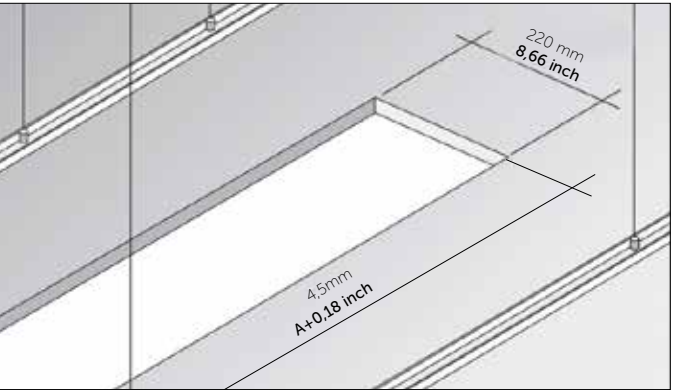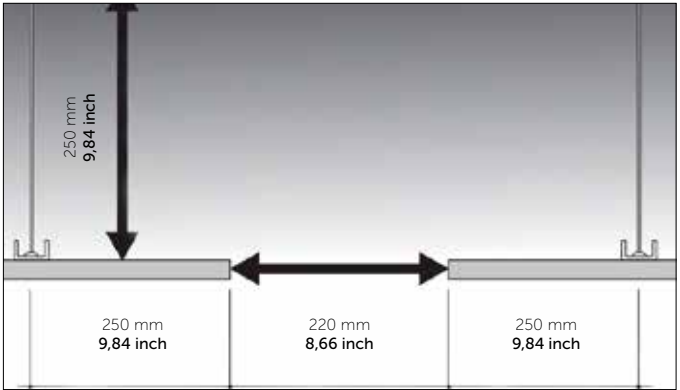

MISSING




INNER

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*); X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

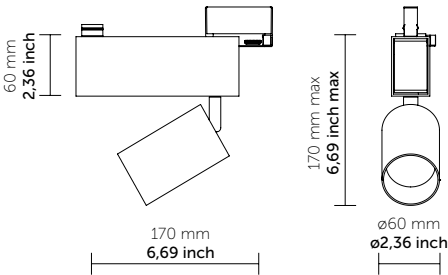

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

IN005 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

For dry location 

IN007 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm – 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
IN005 15W120V IN007 22W120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :IN005 G 8030 M 01






INNER

Design: QUATTROBI TECHNICAL DEPARTMENT

Semi-recessed trim adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Complete with housing. IC rated.



FEATURES

Power (W)	15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Semi-recessed
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

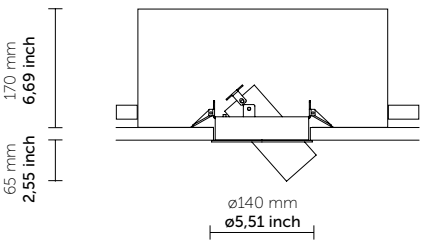

① ø135 mm
ø5,31 inch

0° - 40° vertical tilting / 355° horizontal rotation

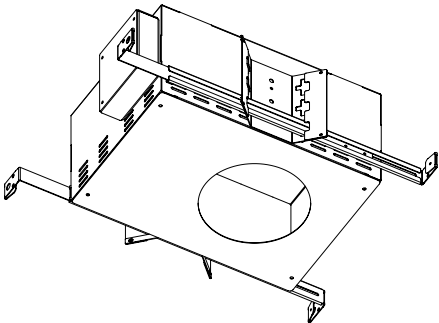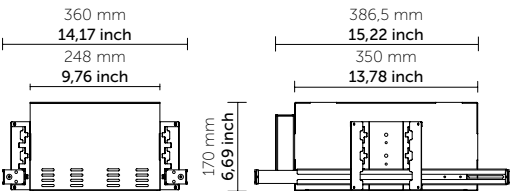

IN001 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

TYPE IC

For dry location 

IN003 22W

2246 lm - 80 CRI – 3000K
2336 lm - 80 CRI – 3500K
2324 lm - 80 CRI – 4000K
1863 lm - 90 CRI – 3000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
IN001 15W120V IN003 22W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IN001 8030 M 01**




MAX

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	26 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

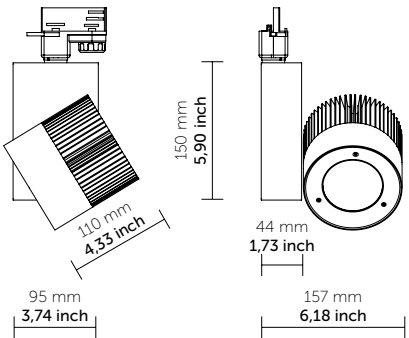

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

MX121 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

MX101 40W

4550 lm - CRI 80 – 3000K
4736 lm - CRI 80 – 3500K
4800 lm - CRI 80 – 4000K
3880 lm – CRI 90 – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
MX121 26W120V MX101 40W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **MX121 G 8030 M 01**

Accessories

GA70

Adapter kit for ceiling installation - white, grey, black






MINI MAX

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming



0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

MM101 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

MM103 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
MM101 15W120V MM103 26W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **MM101 G 8030 M 01**

Accessories

GA70

Adapter kit for ceiling installation - white, grey, black





PILLOWS

PILLOWS

SLIPPERS

PILLOW TALK
FIND THE PERFECT PILLOW




PHOTO

Design: LUCA RACIOPPO ARCHITECT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	26 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

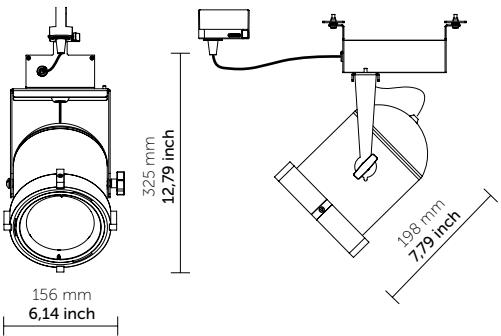

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

CV001 26W

2513 lm - 80 CRI - 3000K
2613 lm - 80 CRI - 3500K
2663 lm - 80 CRI - 4000K
2130 lm - 90 CRI - 3000K

S - Spot - 15°
M - Medium - 30°
W - Wide - 40°

For dry location 

CV003 40W

4550 lm - CRI 80 - 3000K
4736 lm - CRI 80 - 3500K
4800 lm - CRI 80 - 4000K
3880 lm - CRI 90 - 3000K

S - Spot - 15°
M - Medium - 30°
W - Wide - 40°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
CV001 26W120V CV003 40W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **CV001 G 8030 M 01**






PHOTO

Design: LUCA RACIOPPO ARCHITECT


Recessed trim adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Complete with housing. IC rated.

FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

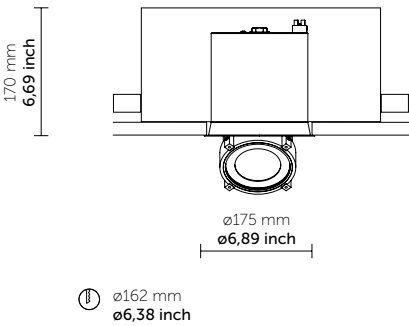

0° - 45° vertical tilting / 355° horizontal rotation

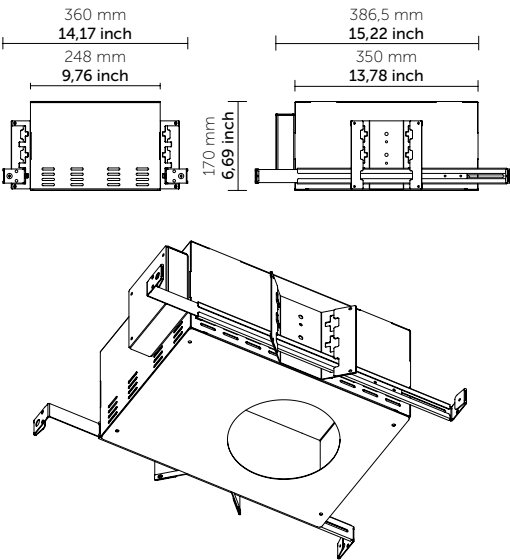

CV005 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location 

CV007 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
CV005 15W120V CV007 26W120V 0-10V dim on request	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **CV005 8030 M 01**




SAM95

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 20 - 26 - 38 - 50
Light beam (°)	Spot - Medium - Wide
Installation	Track ; X version-Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

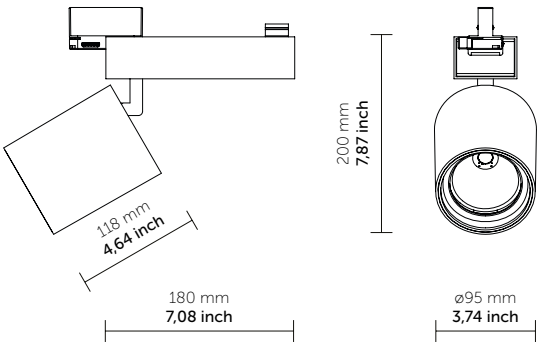

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

SA111 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm – 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SA114 38W

4084 lm - 80 CRI – 3000K
4240 lm - 80 CRI – 3500K
4194 lm - 80 CRI – 4000K
3384 lm – 90 CRI – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

For dry location 

SA112 20W

2246 lm - CRI 80 – 3000K
2336 lm - CRI 80 – 3500K
2324 lm - CRI 80 – 4000K
1863 lm – CRI 90 – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SA115 50W

5022 lm - 80 CRI – 3000K
5112 lm - 80 CRI – 3500K
5150 lm - 80 CRI – 4000K
4129 lm – 90 CRI – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

SA113 26W

2513 lm - CRI 80 – 3000K
2613 lm - CRI 80 – 3500K
2663 lm - CRI 80 – 4000K
2130 lm – CRI 90 – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SA111 15W120V SA112 20W120V SA113 26W120V SA114 38W120V SA115 50W120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request
Phase cut dimming				

Ordering example : **SA111 X 8030 M 01**







SPINNER

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.

FEATURES

Total fixture Watts	17 - 26 - 38 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

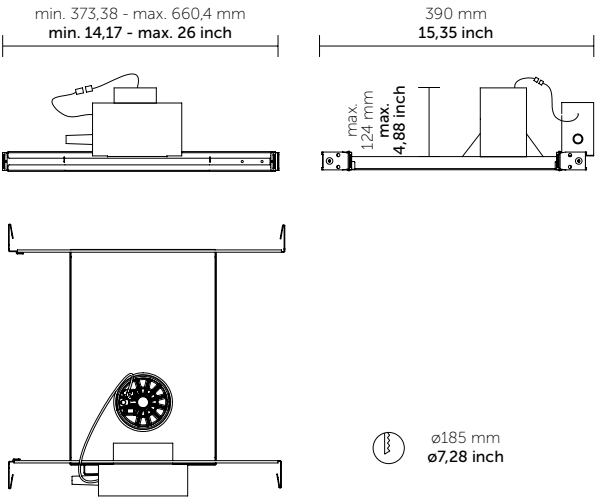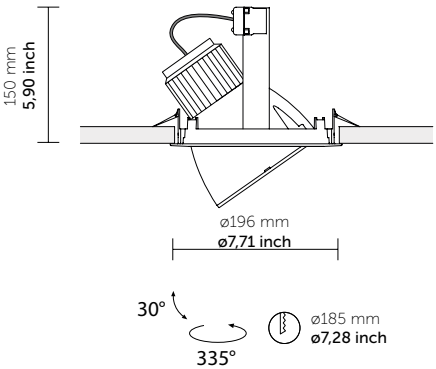

SPARTR1 17W

1418 lm - 80 CRI – 3000K
1467 lm - 80 CRI – 3500K
1494 lm - 80 CRI – 4000K
1202 lm - 90 CRI – 3000K

S - Spot - 12°
M - Medium - 24°
W - Wide - 55°

SPARTR1 26W

2262 lm - 80 CRI – 3000K
2352 lm - 80 CRI – 3500K
2397 lm - 80 CRI – 4000K
1917 lm - 90 CRI – 3000K

S - Spot - 12°
M - Medium - 24°
W - Wide - 55°

SPARTR2 38W

3676 lm - CRI 80 – 3000K
3816 lm - CRI 80 – 3500K
3775 lm - CRI 80 – 4000K
3046 lm - CRI 90 – 3000K

S - Spot - 16°
M - Medium - 32°
W - Wide - 56°

SPARTR2 48W

4676 lm - CRI 80 – 3000K
4866 lm - CRI 80 – 3500K
4932 lm - CRI 80 – 4000K
3987 lm - CRI 90 – 3000K

S - Spot - 16°
M - Medium - 32°
W - Wide - 56°

TYPE NON IC

For dry location 

17 - 26 W							
Projector ordering info				Housing ordering info			
Model	Cri/Color	Beam	Finish	Model	Power	Voltage	Dimming
----	----	-	--	----	----	-	--
SPARTR1	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SPH2ARNCTR	17 17W 26 26W	120	0 0-10V on request

Projector ordering example: SPARTR1 8030 M 01

Housing ordering example: SLR1ARNCTR 26 120

38 - 48 W							
Projector ordering info				Housing ordering info			
Model	Cri/Color	Beam	Finish	Model	Power	Voltage	Dimming
----	----	-	--	----	----	-	--
SPARTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SPH2ARNCTR	38 38W 48 48	120	0 0-10V on request

Projector ordering example: SPARTR2 8030 M 01

Housing ordering example: SLR1ARNCTR 38 120





SPINNER

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.

FEATURES

Total fixture Watts	17 - 26 - 38 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

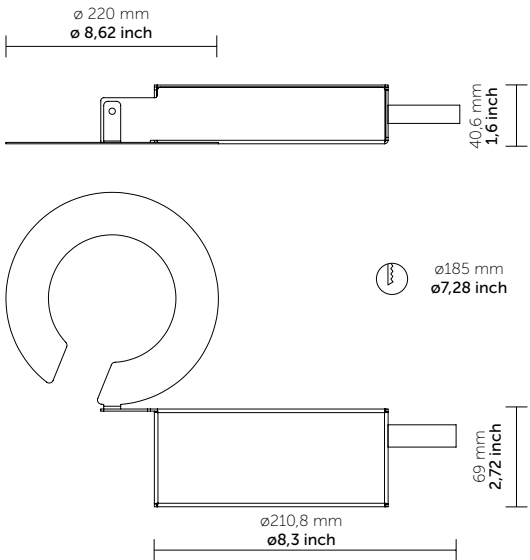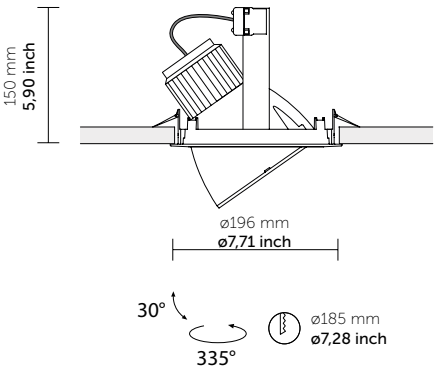

SPARTR1 17W

1418 lm - 80 CRI – 3000K
1467 lm - 80 CRI – 3500K
1494 lm - 80 CRI – 4000K
1202 lm - 90 CRI – 3000K

S - Spot - 12°
M - Medium - 24°
W - Wide - 55°

SPARTR2 38W

3676 lm - CRI 80 – 3000K
3816 lm - CRI 80 – 3500K
3775 lm - CRI 80 – 4000K
3046 lm – CRI 90 – 3000K

S - Spot - 16°
M - Medium - 32°
W - Wide - 56°

TYPE NON IC

For dry location 

SPARTR1 26W

2262 lm - 80 CRI – 3000K
2352 lm - 80 CRI – 3500K
2397 lm - 80 CRI – 4000K
1917 lm – 90 CRI – 3000K

S - Spot - 12°
M - Medium - 24°
W - Wide - 55°

SPARTR2 48W

4676 lm - CRI 80 – 3000K
4866 lm - CRI 80 – 3500K
4932 lm - CRI 80 – 4000K
3987 lm – CRI 90 – 3000K

S - Spot - 16°
M - Medium - 32°
W - Wide - 56°

17 - 26 W							
Projector ordering info				Housing ordering info			
Model	Cri/Color	Beam	Finish	Model	Power	Voltage	Dimming
----	----	-	--	----	----	-	--
SPARTR1	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SLR1ARNCTR	17 17W 26 26W	120	0 0-10V on request

Projector ordering example: SPARTR1 8030 M 01

Housing ordering example: SLR1ARNCTR 26 120

38 - 48 W							
Projector ordering info				Housing ordering info			
Model	Cri/Color	Beam	Finish	Model	Power	Voltage	Dimming
----	----	-	--	----	----	-	--
SPARTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SLR2ARNCTR	38 38W 48 48W	120	0 0-10V on request

Projector ordering example: SPARTR2 8030 M 01

Housing ordering example: SLR2ARNCTR 38 120





SUNLIGHT 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless round luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

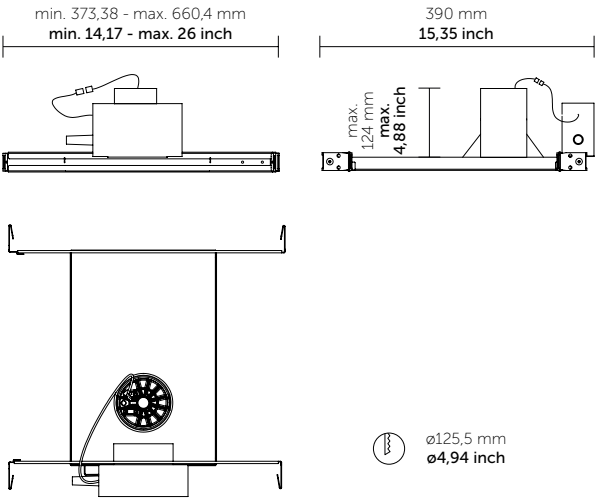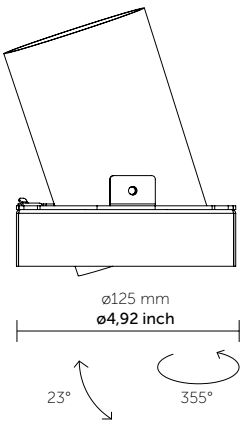

SLARTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLARTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLARTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2ARNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2ARNCTL 17 12 0**





SUNLIGHT 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless round luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

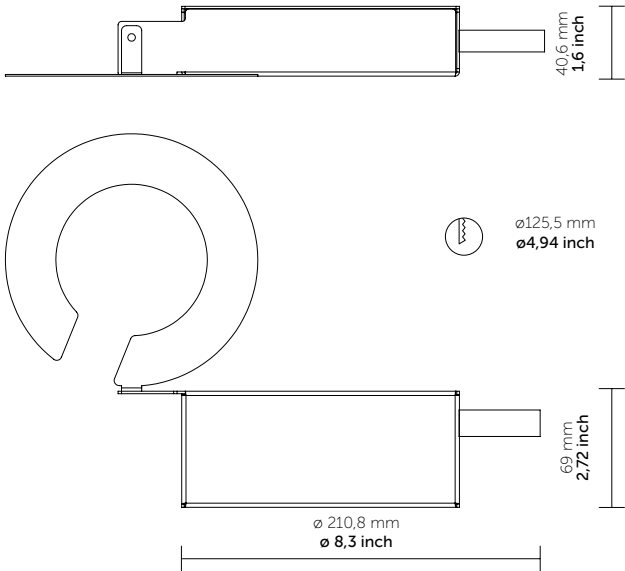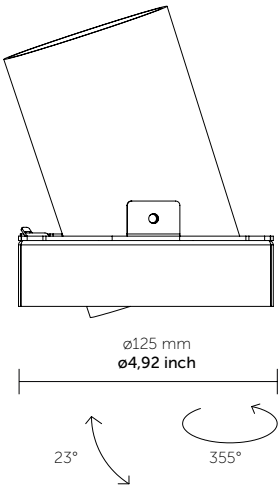

SLARTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLARTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLARTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1ARNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1ARNCTL 17 12 0**





SUNLIGHT 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hzz

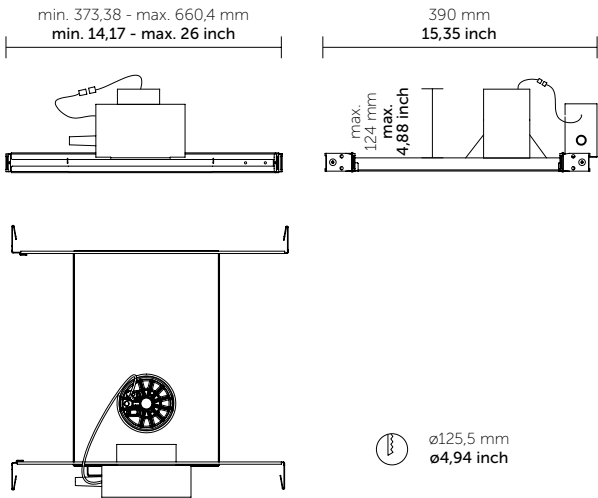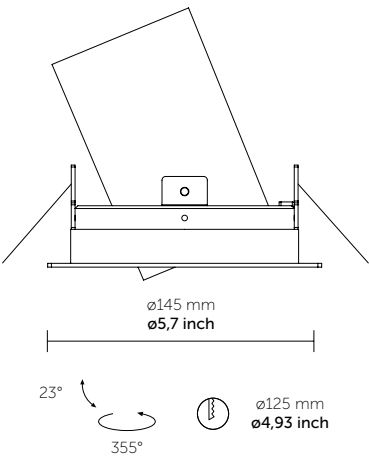

SLARTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLARTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLARTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2ARNCTR 17 12 0**





SUNLIGHT 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hzz

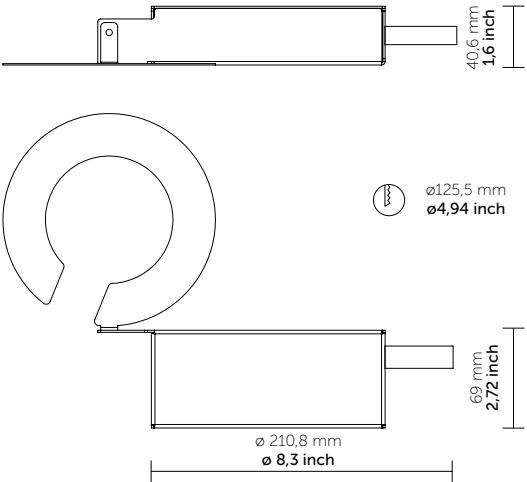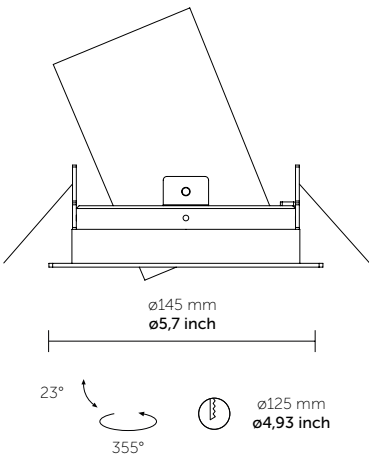

SLARTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLARTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLARTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1ARNCTR 17 12 0**





SUNLIGHT 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.

FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hzz

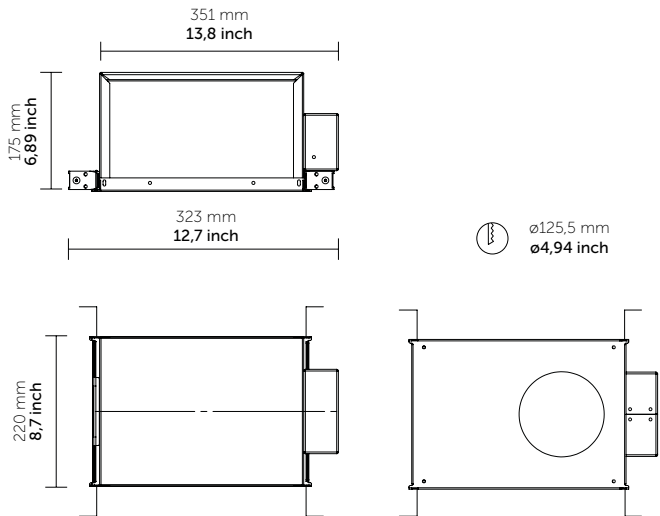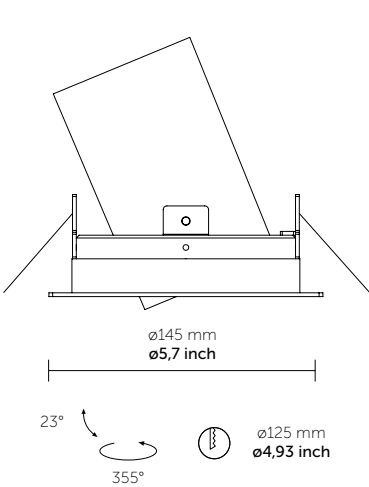

SLARTR 17W

1830 lm - 80 CRI - 3000K
1903 lm - 80 CRI - 3500K
1940 lm - 80 CRI - 4000K
1549 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE CCEA
TYPE IC

For dry location 

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example: **SLARTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH3ARCPTR (CCEA) SLH3ARICTR (IC))	17 17W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example: **SLH3ARCPTR 17 12 0**







SUNLIGHT 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

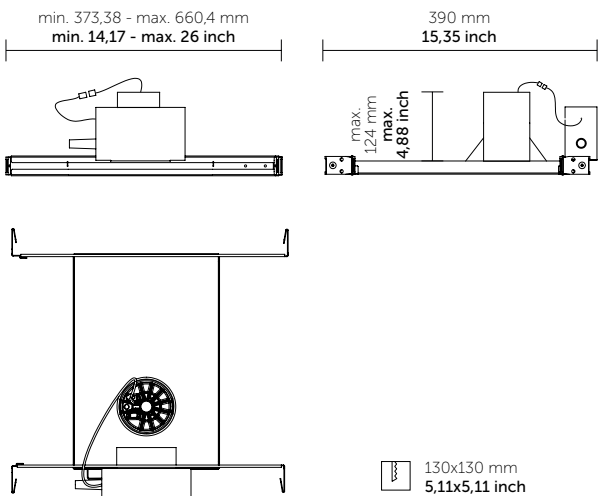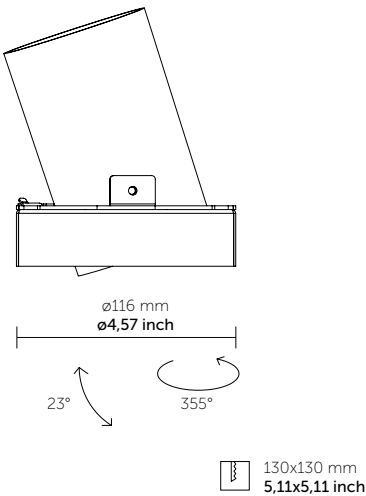

SLASTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLASTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLASTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLASTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2ASNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2ASNCTL 17 12 0**





SUNLIGHT 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

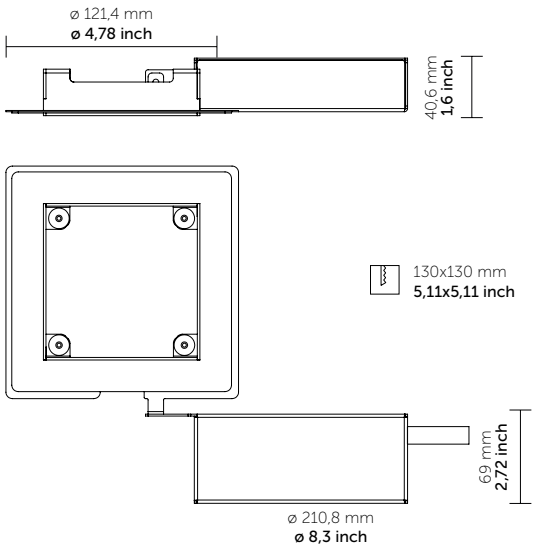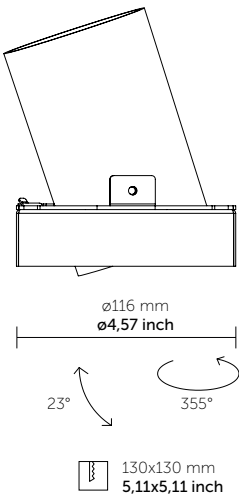

SLASTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLASTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
SLASTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTL 8030 M 01

Housing ordering info

Model	Power	Voltage	Dimming
-----	----	-	--
SLR1ASNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :SLR1ASNCTL 17 12 0





SUNLIGHT 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

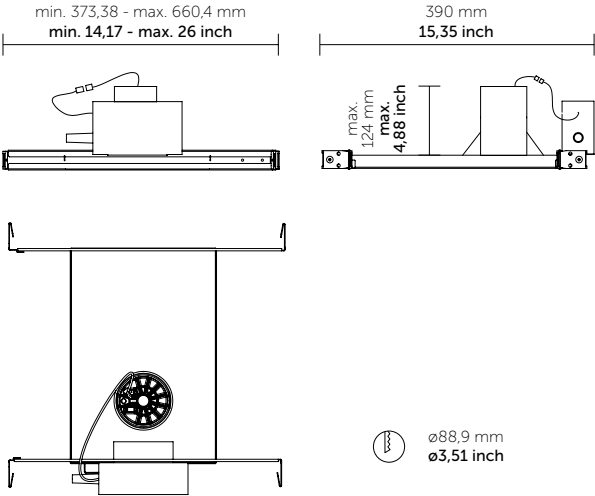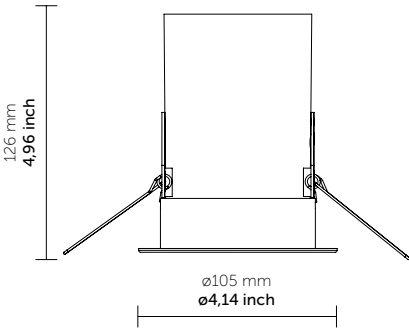

SLDSTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDSTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDSTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDSTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2DRNCTR 17 12 0**





SUNLIGHT 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

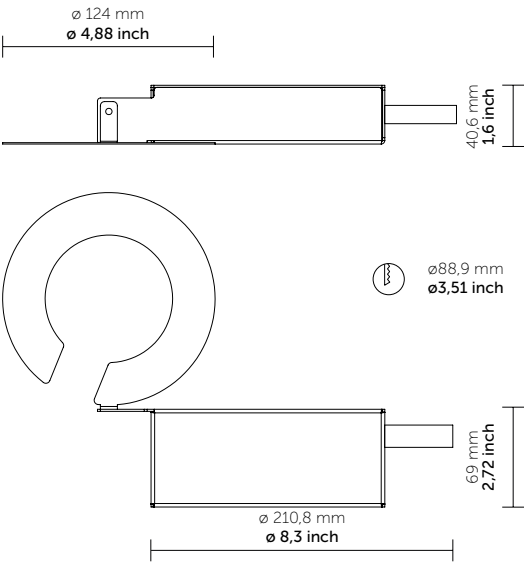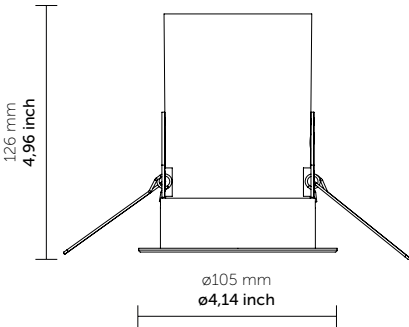

SLDSTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDSTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDSTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDSTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1DRNCTR 17 12 0**




SUNLIGHT 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

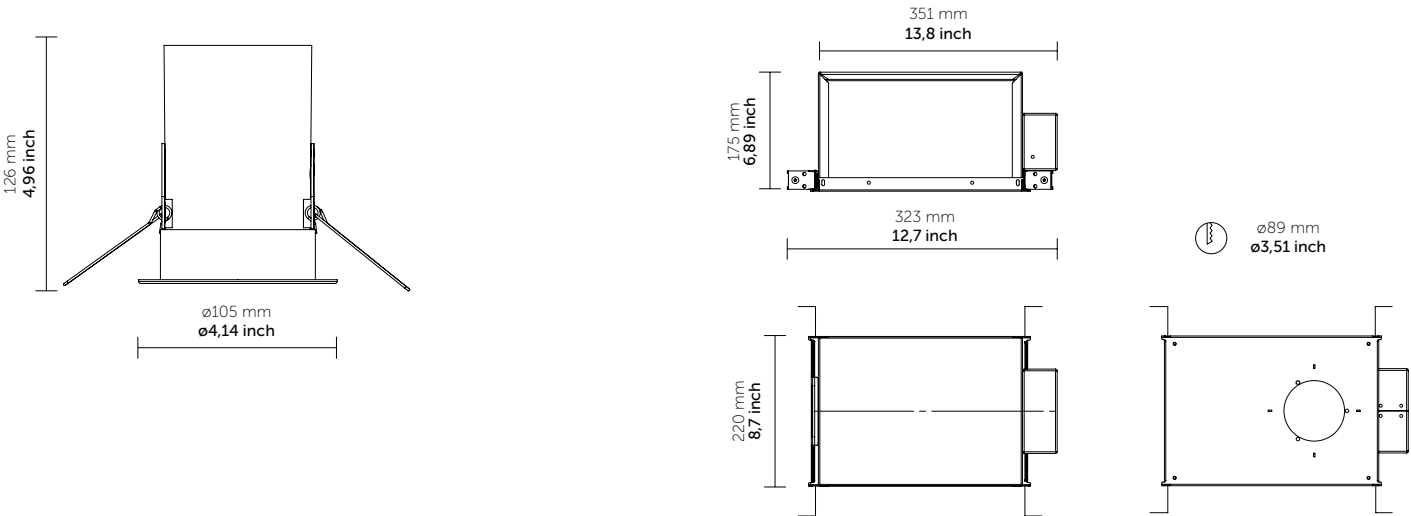

SLDSTR 17W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI - 4000K
1549 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE CCEA
TYPE IC
For dry location 

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDSTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH3DRCPTR (CCEA) SLH3DRICTR (IC))	17 17W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2DRNCTR 17 12 0**







SUNLIGHT 05

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

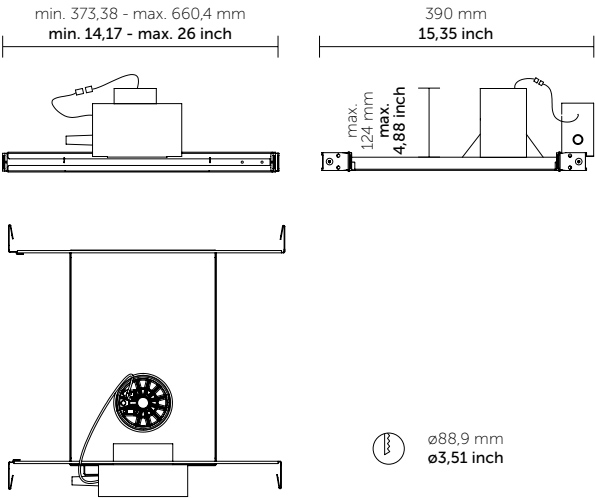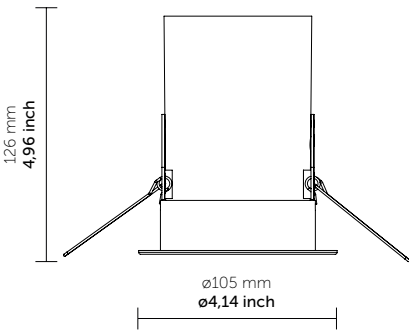

SLDRTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDRTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2DRNCTR 17 12 0**





SUNLIGHT 05

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

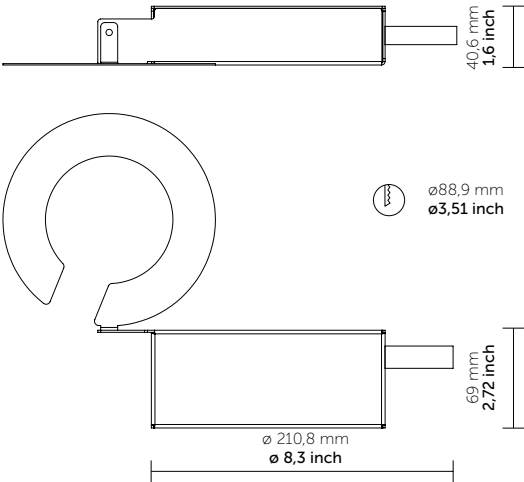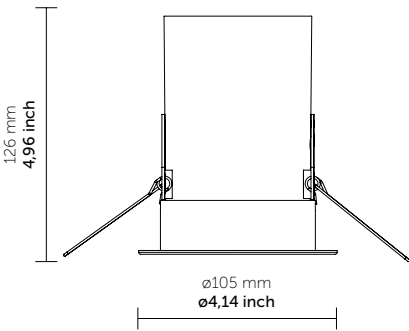

SLDRTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDRTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1DRNCTR 17 12 0**




SUNLIGHT 05

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.

FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

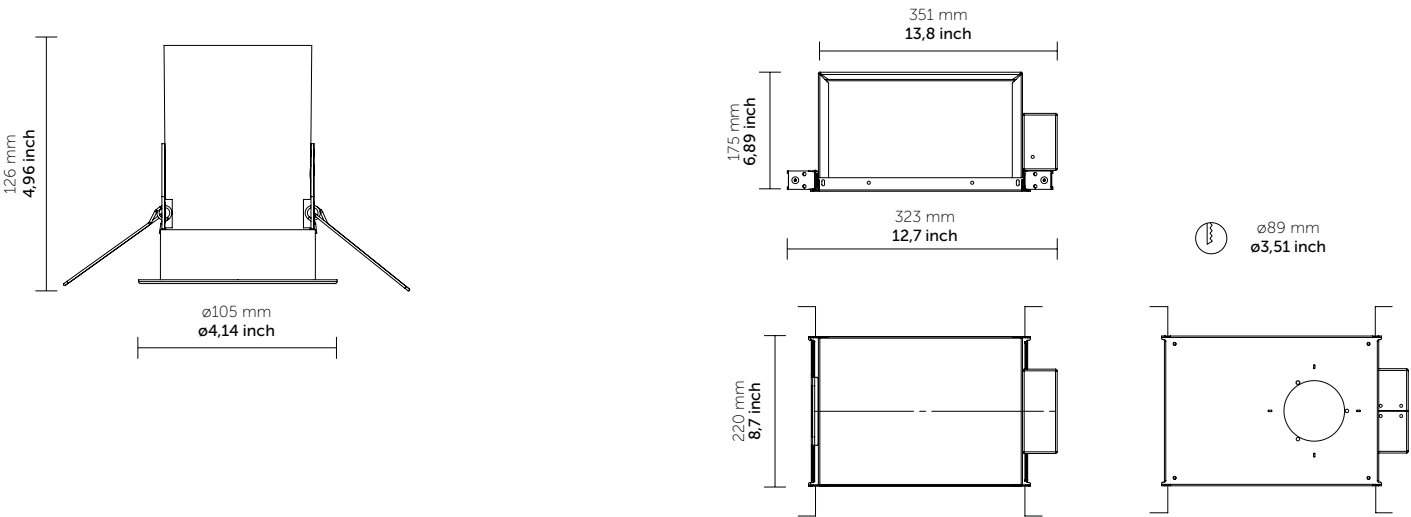

SLDRTR 17W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI - 4000K
1549 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE CCEA
TYPE IC

For dry location 

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example: **SLDRTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH3DRCPTR (CCEA) SLH3DRICTR (IC)	17 17W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example: **SLH2DRNCTR 17 12 0**





SUNLIGHT95

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 - 22 - 26 - 35 - 50
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

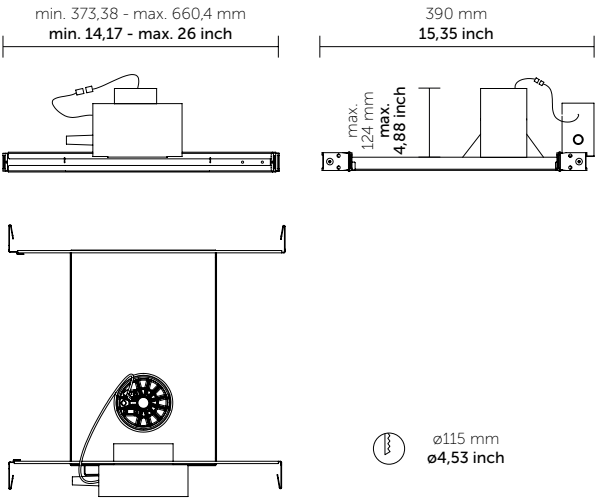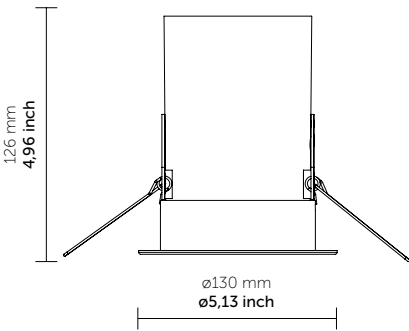

SLBRTR1 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SLBRTR2 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLBRTR1 22W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SLBRTR2 50W

5022 lm - CRI 80 – 3000K
5112 lm - CRI 80 – 3500K
5150 lm - CRI 80 – 4000K
4129 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

SLBRTR1 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm - CRI 90 – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLBRTR1	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K	S Spot M Medium W Wide	01 white 02 black 18 grey
SLBRTR2	Other on request	Other on request	Other on request

Ordering example :**SLDRTR1 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2DRNCTR	17 17W 22 22W 26 26W 35 35W 50 50W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2DRNCTR 17 12 0**





SUNLIGHT95

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 - 22 - 26 - 35 - 50
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

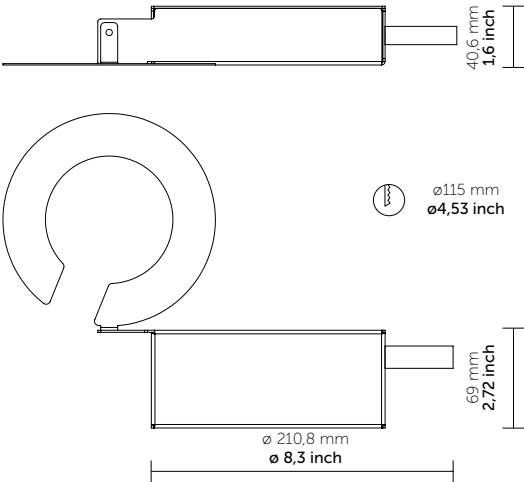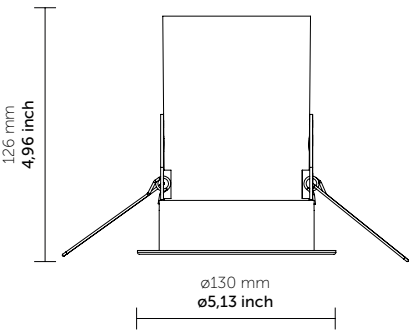

SLBRTR1 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SLBRTR2 35W

4084 lm - CRI 80 – 3000K
4240 lm - CRI 80 – 3500K
4194 lm - CRI 80 – 4000K
3384 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLBRTR1 22W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SLBRTR2 50W

5022 lm - CRI 80 – 3000K
5112 lm - CRI 80 – 3500K
5150 lm - CRI 80 – 4000K
4129 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

SLBRTR1 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm - CRI 90 – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLBRTR1	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K	S Spot M Medium W Wide	01 white 02 black 18 grey
SLBRTR2	Other on request	Other on request	Other on request

Ordering example :**SLBRTR1 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR4DRNCTR	17 17W 22 22W 26 26W 35 35W 50 50W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR4DRNCTR 17 12 0**





SUNLIGHT 06

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

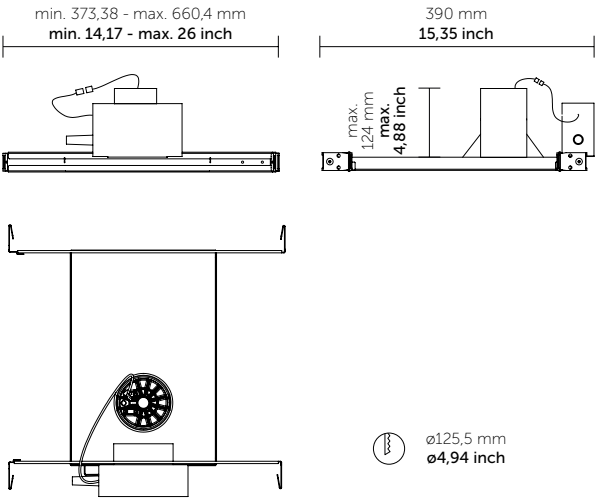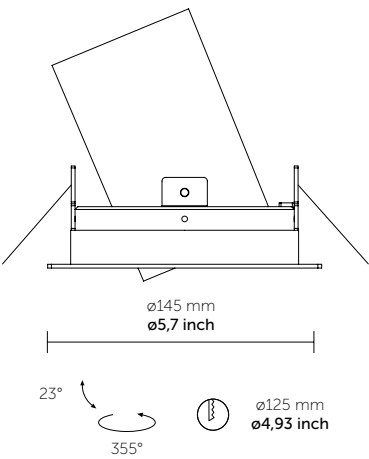

SLASTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLASTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLASTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2ARNCTR 17 12 0**





SUNLIGHT 06

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

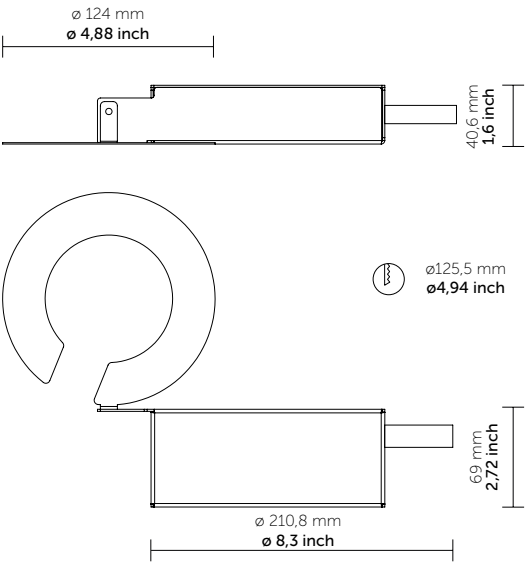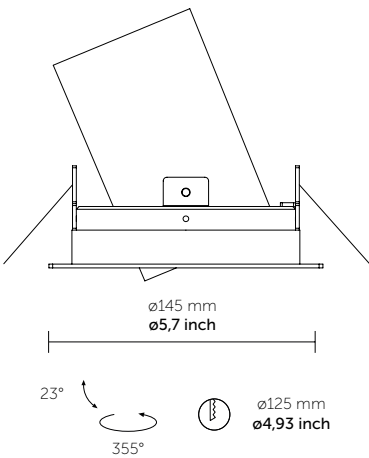

SLASTR 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTR 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLASTR 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLASTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1ARNCTR 17 12 0**



SUNLIGHT 06

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.

SLASTR 17W


1830 lm - 80 CRI - 3000K
1903 lm - 80 CRI - 3500K
1940 lm - 80 CRI - 4000K
1549 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE CCEA
TYPE IC
For dry location 

FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

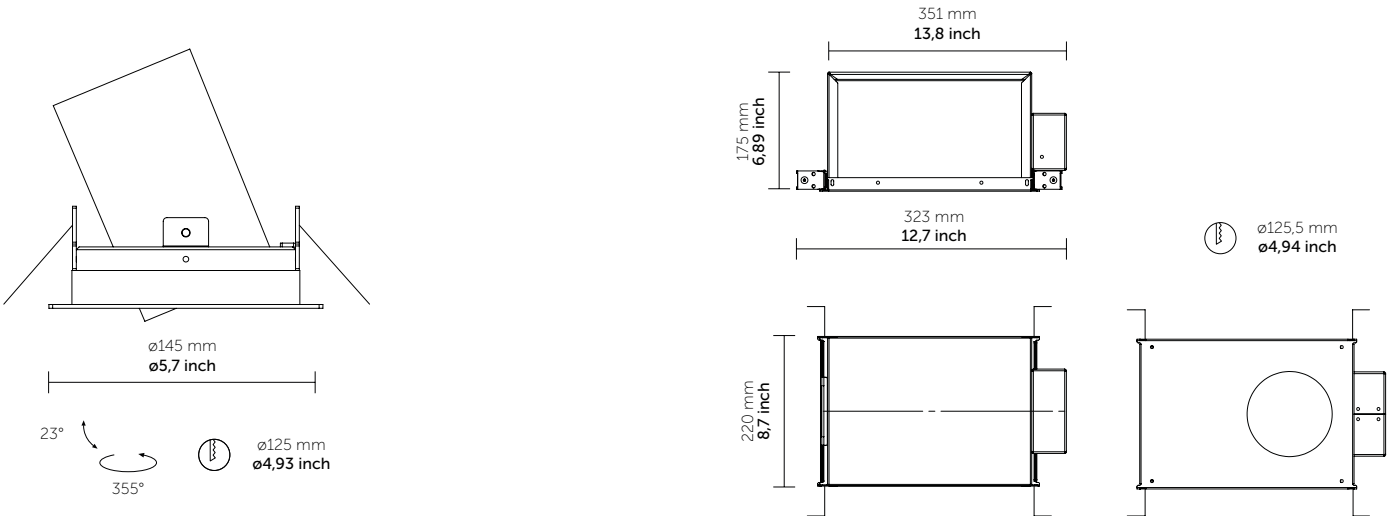

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLASTR 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR3ARCPTTR (CCEA) SLR3ARICTR (IC))	17 17W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example: **SLR3ARCPTTR 17 12 0**





SUNLIGHT 07

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

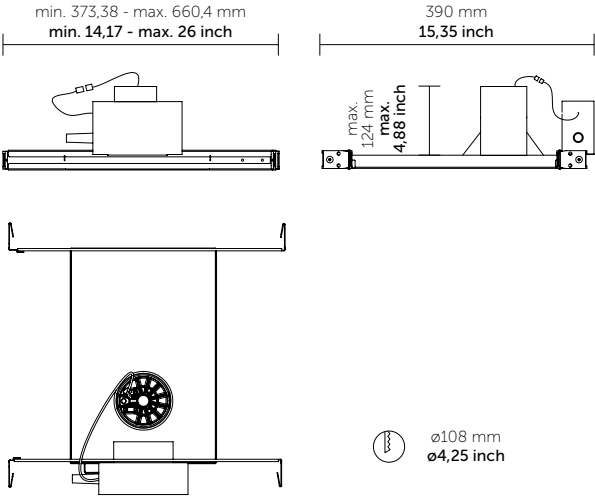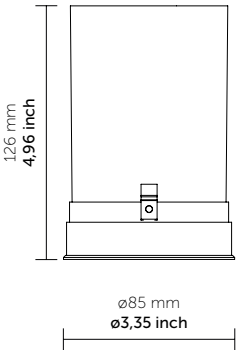

SLDRTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDRTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2DRNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLH2DRNCTL 17 12 0**





SUNLIGHT 07

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Remodeler version.

FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

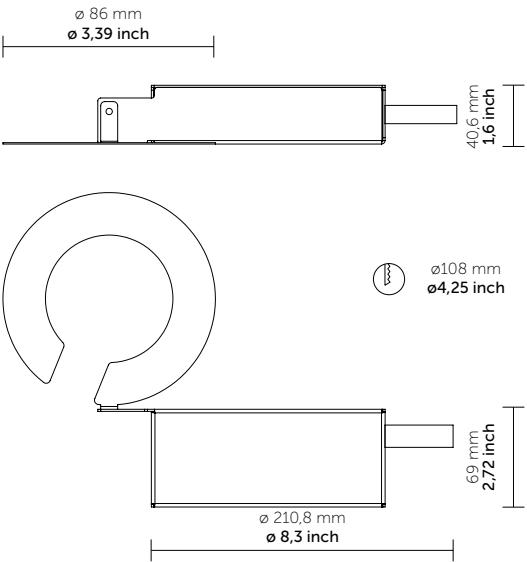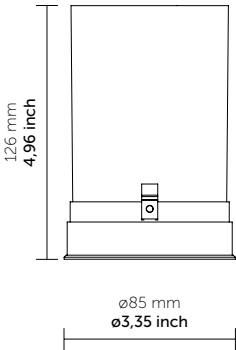

SLDRTL 17W

1440 lm - 80 CRI – 3000K
1497 lm - 80 CRI – 3500K
1525 lm - 80 CRI – 4000K
1218 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTL 26W

2313 lm - CRI 80 – 3000K
2405 lm - CRI 80 – 3500K
2451 lm - CRI 80 – 4000K
1958 lm – CRI 90 – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location 

SLDRTL 21W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI – 4000K
1549 lm – 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLR1DRNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example :**SLR1DRNCTL 17 12 0**




SUNLIGHT 07

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.

FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz

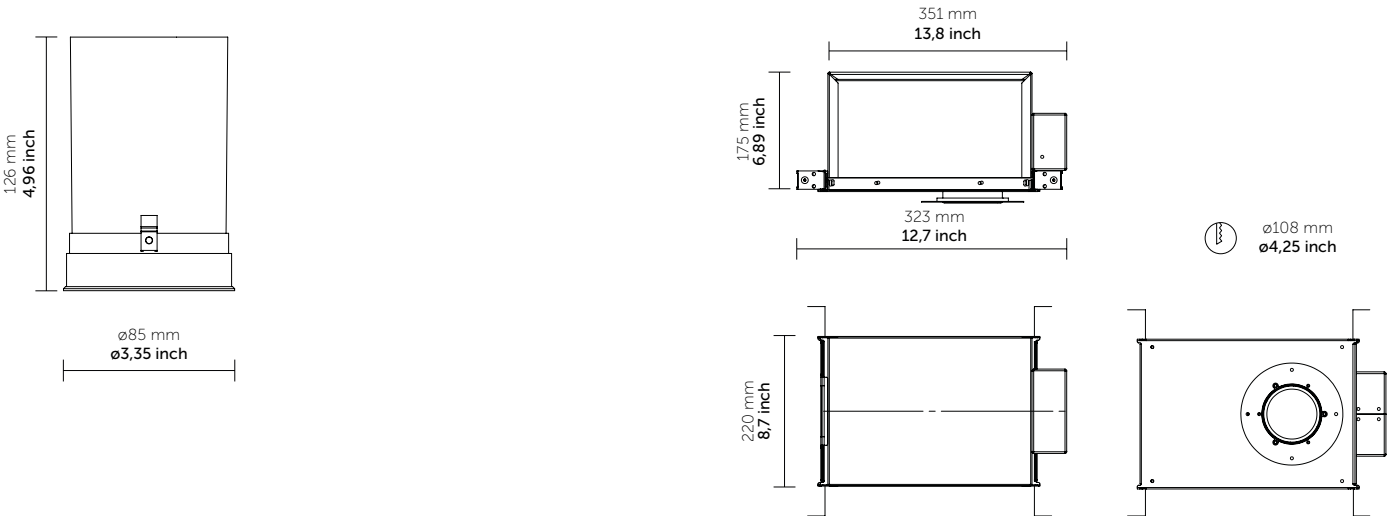

SLDRTL 17W

1830 lm - 80 CRI – 3000K
1903 lm - 80 CRI – 3500K
1940 lm - 80 CRI - 4000K
1549 lm - 90 CRI – 3000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE CCEA
TYPE IC
For dry location 

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTL 8030 M 01**

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH3DRCPTL (CCEA) SLH3DRICTL (IC))	17 17W	12 120 Volt UN 277 Volt	LC GB-TRIAC 0 NO DIM

Ordering example: **SLH3DRCPTL 17 12 0**




SMOKE

Design: QUATTROBI TECHNICAL DEPARTMENT

Adjustable projector with LED lighting system.
Optical assembly is equipped with a front protection louver .
With electronic driver.

FEATURES

Power (W)	15 - 25 - 37 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Track; G version Global(*) GES compatible; X version Global(*) XTS compatible
Luminaire housing	Extruded aluminium
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

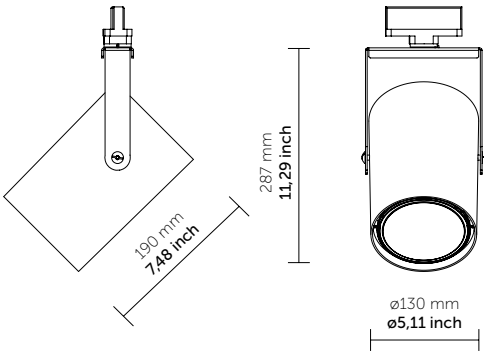

SM151 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 24°
W - Wide - 48°

SM155 37W

3774 lm - 80 CRI – 3000K
3920 lm - 80 CRI – 3500K
3992 lm - 80 CRI – 4000K
3213 lm - 90 CRI – 3000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

For dry location 

SM153 25W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 24°
W - Wide - 48°

SM157 48W

5022 lm - CRI 80 – 3000K
5112 lm - CRI 80 – 3500K
5150 lm - CRI 80 – 4000K
4129 lm – CRI 90 – 3000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM151 SM153 SM155 SM157	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **SM153 G 8030 M 01**

Accessories

SA102
Directional louvers







SMOKE 60 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15-20
Light beam (°)	Spot - Medium - Wide
Installation	Suspension; G version Global(*) GES compatible; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming, J box - 0-10V dim



SM160 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

For dry location 

SM161 20W

2171 lm - 80 CRI – 3000K
2215 lm - 80 CRI – 3500K
2246 lm - 80 CRI – 4000K
1801 lm - 90 CRI – 3000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM160 15W120V SM161 20W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 03 ... Other on request

Ordering example : **SM160 G 8030 M 01**




SMOKE 60 02
Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15-20
Light beam (°)	Spot - Medium - Wide
Installation	Suspension; G version Global(*) GES compatible; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming, J box - 0-10V dim



SM162 15W	SM163 20W
1575 lm - 80 CRI – 3000K 1630 lm - 80 CRI – 3500K 1660 lm - 80 CRI – 4000K 1335 lm - 90 CRI – 3000K	2171 lm - 80 CRI – 3000K 2215 lm - 80 CRI – 3500K 2246 lm - 80 CRI – 4000K 1801 lm - 90 CRI – 3000K
S - Spot - 19° M - Medium - 38° W - Wide - 55°	S - Spot - 19° M - Medium - 38° W - Wide - 55°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM162 15W120V SM163 20W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 03 ... Other on request

Ordering example : **SM162 G 8030 M 01**




SMOKE 130

Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 25 - 37 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Suspension
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz

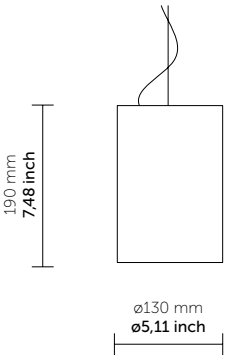

SM251 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 24°
W - Wide - 48°

SM255 37W

3774 lm - 80 CRI – 3000K
3920 lm - 80 CRI – 3500K
3992 lm - 80 CRI – 4000K
3213 lm - 90 CRI – 3000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

For dry location 

SM253 25W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 24°
W - Wide - 48°

SM257 48W

5022 lm - CRI 80 – 3000K
5112 lm - CRI 80 – 3500K
5150 lm - CRI 80 – 4000K
4129 lm - CRI 90 – 3000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM251 15W120V SM253 25W120V SM255 37W120V SM257 48W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **SM251 G 8030 M 01**




INK

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 26 - 35 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version Onetrack (*) compatible, X version Global (*), XTS compatible, G Global GES compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

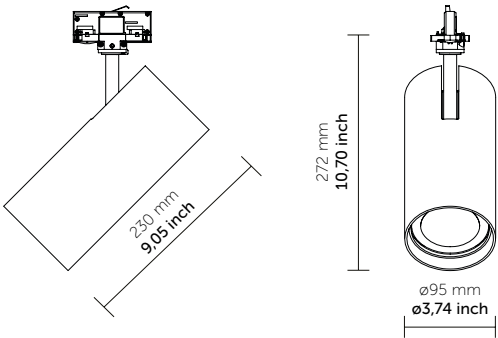

0° - 90° vertical tilting / 355° horizontal rotation

IK101 15W

1575 lm - 80 CRI – 3000K
1630 lm - 80 CRI – 3500K
1660 lm - 80 CRI – 4000K
1335 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

IK105 35W

4084 lm - 80 CRI – 3000K
4240 lm - 80 CRI – 3500K
4194 lm - 80 CRI – 4000K
3384 lm - 90 CRI – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location 

IK103 26W

2513 lm - 80 CRI – 3000K
2613 lm - 80 CRI – 3500K
2663 lm - 80 CRI – 4000K
2130 lm - 90 CRI – 3000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

IK107 40W

4550 lm - CRI 80 – 3000K
4736 lm - CRI 80 – 3500K
4800 lm - CRI 80 – 4000K
3880 lm - CRI 90 – 3000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
IK101 15W120V IK103 26W120V IK105 35W120V IK107 40W120V 0-10V dim(S Adapter only) ----- Phase cut dimming	S Stucchi Onetrack(*) compatible X Global(*) XTS compatible G Global(*) GES compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IK101 S 8030 M 01**




MINI INK

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front polycarbonate protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.

FEATURES

Power (W)	15 - 20 - 26
Light beam (°)	Spot - Medium - Elliptical
Installation	Track: G version Global(*) GES compatible ; X version - Global (*) XTS compatible; S version Onetrack compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated

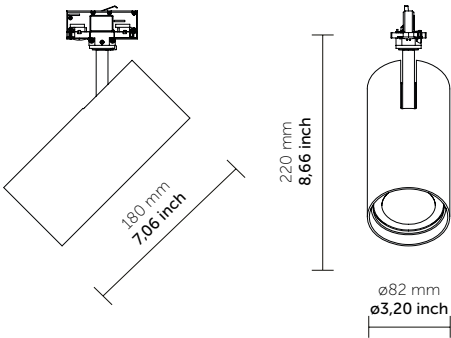

0° - 90° vertical tilting / 355° horizontal rotation

IK201 15W

1519 lm - 80 CRI - 3000K
1541 lm - 80 CRI - 3500K
1563 lm - 80 CRI - 4000K
1233 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

IK203 20W

2171 lm - 80 CRI - 3000K
2202 lm - 80 CRI - 3500K
2234 lm - 80 CRI - 4000K
1762 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

For dry location 

IK205 26W

2605 lm - 80 CRI - 3000K
2643 lm - 80 CRI - 3500K
2680 lm - 80 CRI - 4000K
2114 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

Ordering info

Model	Adapter	Cri/Color	Dimming	Beam	Finish
----	-	----		-	--
IK201 15W120V IK203 20W120V IK205 35W120V	S Stucchi Onetrack(*) compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K	0 Phase cut dimming (Leading Edge or Trailing Edge) A 0-10V (S adapter only)	S Spot M Medium W Wide EL Elliptical Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IK201 S 8030 0 M 01**




SAM LINE VOLTAGE

Design: QUATTROBI TECHNICAL DEPARTMENT

Adjustable projector with LED lighting system. Optical assembly is equipped with a front protection louver in tempered glass.
Line voltage

FEATURES

Power (W)	10 - 20 - 30
Light beam (°)	Spot - Medium - Wide - Extrawide
Installation	Track; G version Global(*) GES and GEK compatible; X version Global(*) XTS compatible; T Global(*) TEK compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	120V 60Hz

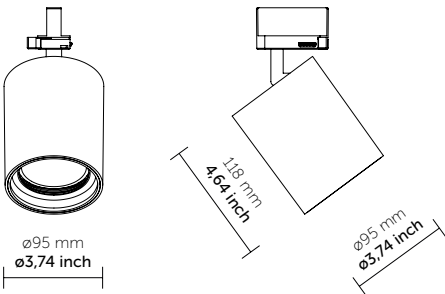

SA500 10W

950lm – CRI80 – 3000K
969lm – CRI80 – 3500K
988lm – CRI80 – 4000K
836lm – CRI90 – 3000K

S - Spot - 14°
M - Medium - 24°
W - Wide - 32°
E - XWide - 60°

SA502 30W

2765lm – CRI80 – 3000K
2820lm – CRI80 – 3500K
2875lm – CRI80 – 4000K
2433lm – CRI90 – 3000K

S - Spot - 18°
M - Medium - 25°
W - Wide - 40°
E - XWide - 64°

For dry location 

SA501 20W

1900lm – CRI80 – 3000K
1938lm – CRI80 – 3500K
1976lm – CRI80 – 4000K
1672lm – CRI90 – 3000K

S - Spot - 14°
M - Medium - 24°
W - Wide - 32°
E - XWide - 60°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SA500 10W120V SA501 20W120V SA502 30W120V	G Global(*) GES and GEK compatible X Global(*) XTS compatible T Global(*) TEK compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K	S Spot M Medium W Wide E Extrawide	01 white 02 black 18 grey Other on request

Ordering example :**SA111 G 8030 M 01**

MICRO MAGNETO

Micro Magneto is a track system designed to fit in tight spaces.

Components

The system is composed of a track and a set of dedicated LED lighting modules that include projectors, linear projectors, and pendants.

The track is made of an extruded aluminum profile available in both linear and custom curved shapes for a recessed, on the surface, or suspended installation.


Installation

Without the need for tools, the lighting modules are installed by hand via a click mounting that automatically connects them to the electrified part inside the track.

Since the system operates on low voltage, the lighting modules can be safely installed and adjusted even while the power is on.

Once the track is installed, you can change the layout of your display space and adjust the lighting without the intervention of the electrician. You can quickly add/remove lighting modules and have instant feedback while orienting the light beams on your product.

The very small profile and light modules allow installation in spaces where there is a need for good frontal illumination and accent lighting.

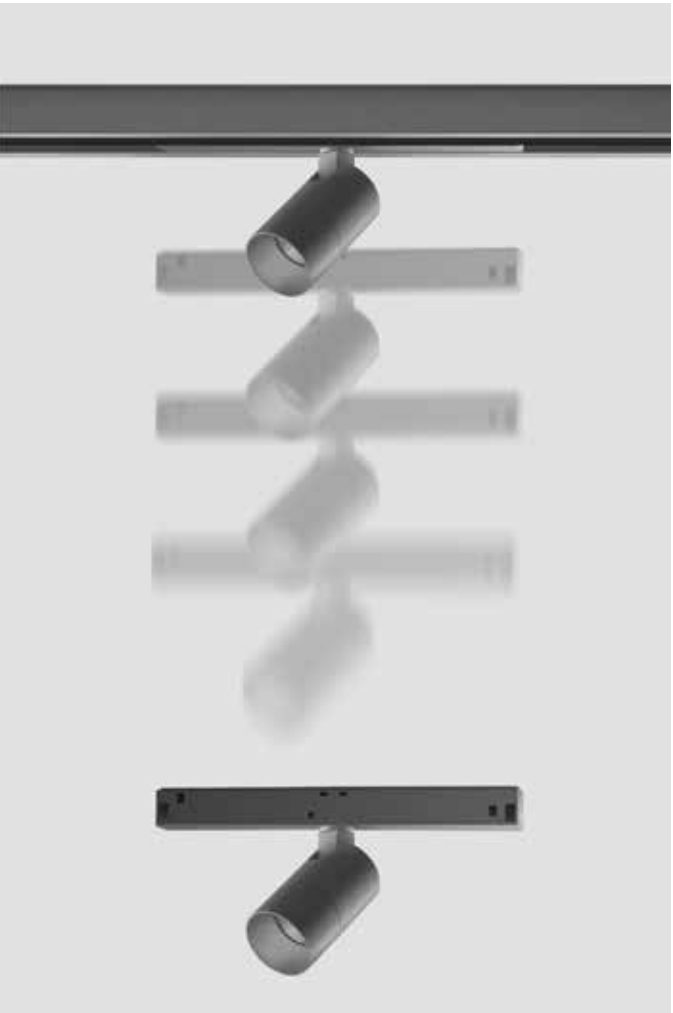

Comparison



LED strip



Micro Magneto




MAGNETO 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

FEATURES

Power (W)	20
Light beam (°)	Spot - Medium - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0/1-10V dim



M1001 20W

2171 lm - 80 CRI – 3000K
2215 lm -80 CRI – 3500K
2246 lm - 80 CRI – 4000K
1801 lm - 90 CRI – 3000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
M1001 20W	M Serie 9500 compatible(*)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K Decor Version and other on request	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example :**M1001 M 8030 M 01**

(*) adapter for Track Multisystem 9500 series








MAGNETO 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

FEATURES

Power (W)	9
Light beam (°)	Spot - Medium - Wide - Elliptical
Installation	Track; M version Serie Multisystem Evo 9500 (*), P version Serie Micro 9600 (**), K Serie 9500 compatible (***)
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated



0° - 90° vertical tilting / 355° horizontal rotation

M2002 9W

900 lm - 80 CRI - 3000K
930 lm - 80 CRI - 3500K
950 lm - 80 CRI - 4000K
770 lm - 90 CRI - 3000K

S - Spot - 18°
M - Medium - 24°
W - Wide - 36°
EL - Elliptical 18° x 33 °

For dry location

Ordering info


Model	Adapter	Cri/Color	Beam	Dimming	Finish
----	-	----	-		--
M2002 (1x9W)	P Serie 9600 compatible (*) M Serie 9500 compatible (**) K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 8030 90CRI/3000K	S Spot M Medium W Wide E Elliptical Other on request	1. On/off A 0/1-10V D Dali	01 white 02 black Other on request

Ordering example :M3003 M 8030 M 01

(*) adapter for Micro Track 9600 series, installable only in class 2 circuit
(**) adapter for Multisystem Evo 9500 series installable only in class 2 circuit
(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit
Long arm version for St2, St5, St10,St14 Multisystem Evo 9500 track, on request

Accessories

SA201
Honeycomb filter



SA200
Honeycomb filter






MAGNETO 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

FEATURES

Power (W)	7
Light beam (°)	Spot - Medium - Wide
Installation	Track; M version Serie Multisystem Evo 9500 (*), P version Serie Micro 9600 (**), K Serie 9500 compatible (***)
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0/1-10V dim



M3003 7W

590 lm - 80 CRI – 3000K
610 lm -80 CRI – 3500K

S - Spot - 22°
M - Medium - 37°
EL - 42° x 19°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
M3003	M Serie 9500 compatible(*)	8030 80CRI/3000K 8035 80CRI/3500K	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example :**M3003 M 8030 M 01**

(*) adapter for Track Multisystem 9500 series




MAGNETO 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

FEATURES

Power (W)	1x3W 2x3W
Light beam (°)	Spot - Medium - Elliptical
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

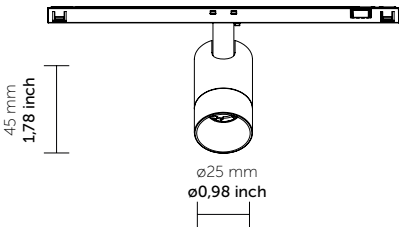

0° - 90° vertical tilting / 355° horizontal rotation

M4004 3W

180 lm - 80 CRI – 3000K
190 lm -80 CRI – 3500K

S - Spot - 15°
M - Medium - 30°
EL - Elliptical 13° x 33 °

M4005 2x3W

2x180 lm - 80 CRI – 3000K
2x 190 lm -80 CRI – 3500K

S - Spot - 15°
M - Medium - 30°
EL - Elliptical – 33 x13°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Dimming	Finish
-----	-	-----	-		--
M4004 (1x3W) M4005 (2x3W)	P Serie 9600 compatible (*) M Serie 9500 compatible (**) K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 8030 90CRI/3000K	S Spot M Medium W Wide E Elliptical Other on request	1. On/off A 0/1-10V D Dali	01 white 02 black Other on request

Ordering example :**M3003 M 8030 M 01**

(*) adapter for Micro Track 9600 series, installable only in class 2 circuit
(**) adapter for Multisystem Evo 9500 series installable only in class 2 circuit
(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit
Long arm version for St2, St5, St10,St14 Multisystem Evo 9500 track, on request

WIRELESS CONTROLS

We have partnered with Casambi to introduce state-of-the-art wireless lighting controls in our LED luminaries.

Essentials

The system gives you complete control over each fixture through a mobile device. You can turn the light on and off, dim it, change its hue, saturation, and color temperature.



Switch



Dimmer



Hue/Saturation



Color Temperature




Group

You can also control multiple fixtures at once by defining a lighting group. This feature can dramatically speed things up, especially when you can manage your entire store's lighting with just a few groups.

Advanced

The system allows you to save any adjustments made to the dimming levels and colors of the fixtures into lighting scenes and switch seamlessly between them.



Scenes



Animations



Timer

You can create animations to make static light come alive. This feature allows you to change dimming levels and colors according to a rhythm and define a sequence of scenes to evoke an atmosphere. In addition, you can instruct the system to switch scenes or play animations at a specific time and date and repeat these changes regularly every year, month, day, or even hour.



Display window application

With this system, the lighting of your display window can always have the right atmosphere.

You can define multiple lighting scenes, typically one for each season, and then instruct the system to switch them at the appropriate date. Once you set it up, you can forget about it.

Is it just me, or does it look like our fixtures can relieve some of the pressure during seasonal inventories and restocks?



Fitting room application

With this system, you can give control of the fitting room's lighting to the customer through a familiar mobile device that lets him change dimming level and color temperature.

You can further simplify the experience with ready-to-use lighting scenes that allow the customer to see how the dress would look in different places like home, office, or restaurant.

Reducing customer uncertainty is the reason why you have a fitting room in the first place, right?

CASAMBI

Casambi is a wireless lighting control system based on Bluetooth Low Energy (BLE).

The system provides a mesh network of inter-operable devices that you can use to wireless control your luminaries.

All you need to use the system is a tablet or a smartphone with the Casambi App installed.


Via the app, you can configure luminaries, schedule lighting operations, perform diagnostics, and always have remote access to the mesh network.

You can find out more on casambi.com



FEATURES

Total fixture Watts	6 - 12 - 18 - 24 - 30
Light beam (°)	Extra wide - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

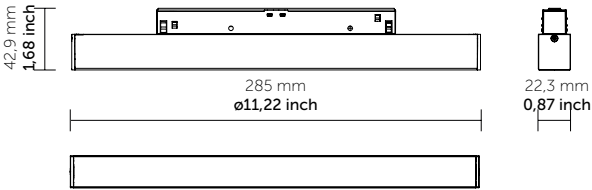

MAGNETO LINE 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Two different emissions : diffused, performance. Several module lengths available for single or continuous row light

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Extra wide (opal diffuser)	344 lumens/ft	368 lumens/ft

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
M006 6W M012 12W M018 18W M024 24W M030 30W	11,28" 22,32" 33,24" 44,4" 55,44"	9030 90CRI/3000K 9040 90CRI/4000K	O opal	O on- off A 1-10V D dali	01 white 02 black


Ordering example: M0069030O002

For dry location 



FEATURES

Total fixture Watts	6 - 12 - 18 - 24 - 30
Light beam (°)	Extra wide - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

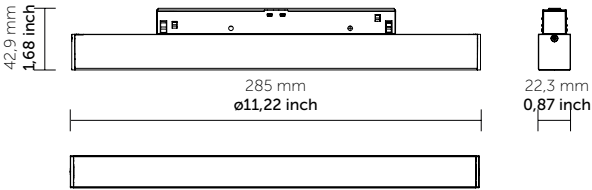

MAGNETO LINE 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Two different emissions : diffused, performance. Several module lengths available for single or continuous row light

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Wide (micro prismatic diffuser)	490 lumens/ft	525 lumens/ft

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-----	-	-	--
M006 6W M012 12W M018 18W M024 24W M030 30W	11,28" 22,32" 33,24" 44,4" 55,44"	9030 90CRI/3000K 9040 90CRI/4000K	M micro prismatic	O on- off A 1-10V D dali	01 white 02 black


Ordering example: M0069030M002

For dry location 



FEATURES

Total fixture Watts	5.6 - 10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

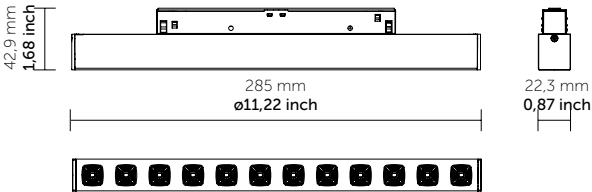

MAGNETO LINE 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Three different emissions: spot, medium and anti-glare whit UGR less than 19, excellent for workplaces. Several module lengths available for single or continuous row light.

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	UGR	419 lumens/ft	441 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
M112	UGR	620 lumens	694 lumens
M114		1007 lumens	1081 lumens
M167		1403 lumens	1506 lumens

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
M056 5.6W M102 10.2W M152 15.2W M182 18.2W	11,28" 22,32" 33,24" 44,4"	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	U UGR	O on- off A 1-10V D dali	01 white 02 black

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
M112 7,7W M114 11.4W M167 16.7W	3,85" 11,28" 11,28"	9030 90CRI/3000K 9040 90CRI/4000K	U UGR	O on- off A 1-10V D dali	01 white 02 black

Ordering example: M0569030U002

For dry location 




MAGNETO LINE 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Three different emissions: spot, medium and anti-glare whit UGR less than 19, excellent for workplaces. Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	5.6 - 10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

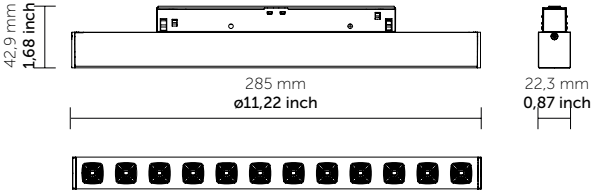

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	Spot /Medium	453 lumens/ft	456 lumens/ft
5.6	Elliptic	422 lumens/ft	443 lumens/ft

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
M056 5.6W M102 10.2W M152 15.2W M182 18.2W	11,28" 22,32" 33,24" 44,4"	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	S Lens 20° M lens 30° E 26x42°	O on- off A 1-10V D dali	01 white 02 black

Ordering example: **M0569030S002**

For dry location 




MAGNETO LINE ADJUSTABLE 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system.
Two different emissions : diffused, performance.
Several module lengths available for single or continuous row light

FEATURES

Total fixture Watts	6 - 12 - 18
Light beam (°)	Extra wide - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

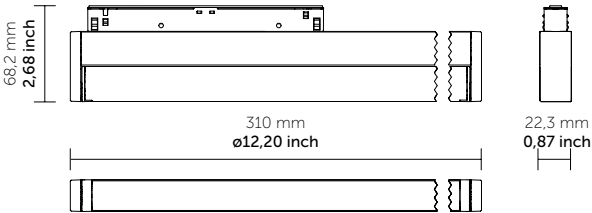

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Extra wide (opal diffuser)	344 lumens/ft	368 lumens/ft

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-----	-	-	--
MA006 6W MA012 12W MA018 18W	12,20" 23,22" 34,25"	9530 95CRI/3000K 9540 95CRI/4000K	O opal	O on- off A 1-10V D dali	01 white 02 black

Ordering example: **MA0069030O002**

For dry location 




MAGNETO LINE ADJUSTABLE 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system.
Two different emissions : diffused, performance.
Several module lengths available for single or continuous row light

FEATURES

Total fixture Watts	6 - 12 - 18
Light beam (°)	Extra wide - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

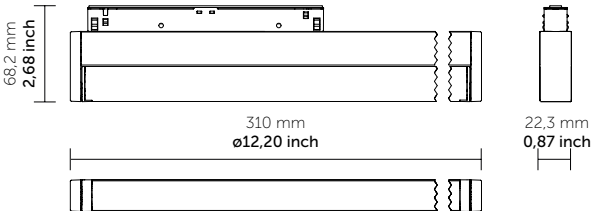

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Wide (micro prismatic diffuser)	490 lumens/ft	525 lumens/ft

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-----	-	-	--
MA006 6W MA012 12W MA018 18W	12,20" 23,22" 34,25"	9530 95CRI/3000K 9540 95CRI/4000K	M micro prismatic	O on- off A 1-10V D dali	01 white 02 black


Ordering example: MA0069030O002

For dry location 



FEATURES

Total fixture Watts	5.6 -7.7-10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

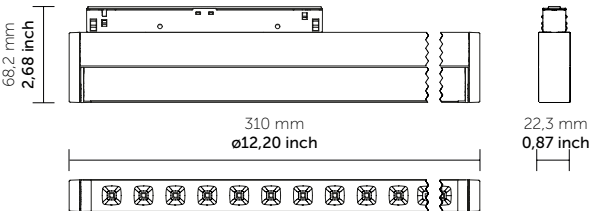

MAGNETO LINE ADJUSTABLE 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Three different emissions: spot, medium and anti-glare whit UGR less than 19, excellent for workplaces. Several module lengths available for single or continuous row light.

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	UGR	419 lumens/ft	441 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
MA112	UGR	620 lumens	694 lumens
MA114		1007 lumens	1081 lumens
MA167		1403 lumens	1506 lumens

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
MA056 5.6W MA102 10.2W MA152 15.2W	12,20" 23,22" 34,25"	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 1-10V D dali	01 white 02 black

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
MA112 7.7W MA114 11.4W MA167 16.7W	4,85" 12,20" 12,20"	9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 1-10V D dali	01 white 02 black

Ordering example: M0569030U002

For dry location 




MAGNETO LINE ADJUSTABLE 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Led light profile with magnetic fastening system. Three different emissions: spot, medium and anti-glare whit UGR less than 19, excellent for workplaces. Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	5.6 - 7.7-10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated

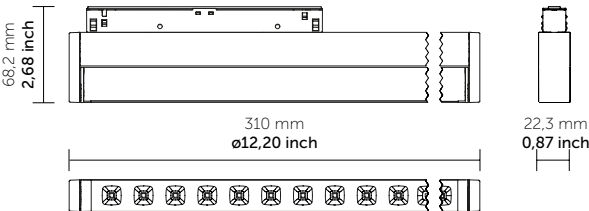

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	Spot /Medium	453 lumens/ft	456 lumens/ft
5.6	Elliptic	422 lumens/ft	443 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
MA112	UGR	620 lumens	694 lumens
MA114		1007 lumens	1081 lumens
MA167		1403 lumens	1506 lumens

Ordering info

Model	Length	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		----	-	-	--
MA056 5.6W MA102 10.2W MA152 15.2W	12,20" 23,22" 34,25"	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	S Lens 20° M lens 30° E 26x42°	O on- off A 1-10V D dali	01 white 02 black

Ordering example: M0569030S002

For dry location 



MAGNETO TRACK

Low voltage track
Low voltage magnetic system Serie 9500 (*)

FEATURES


- Installation

Track housing

Finishing
- Suspended / Surface / Recessed

Extruded aluminum

White, Black

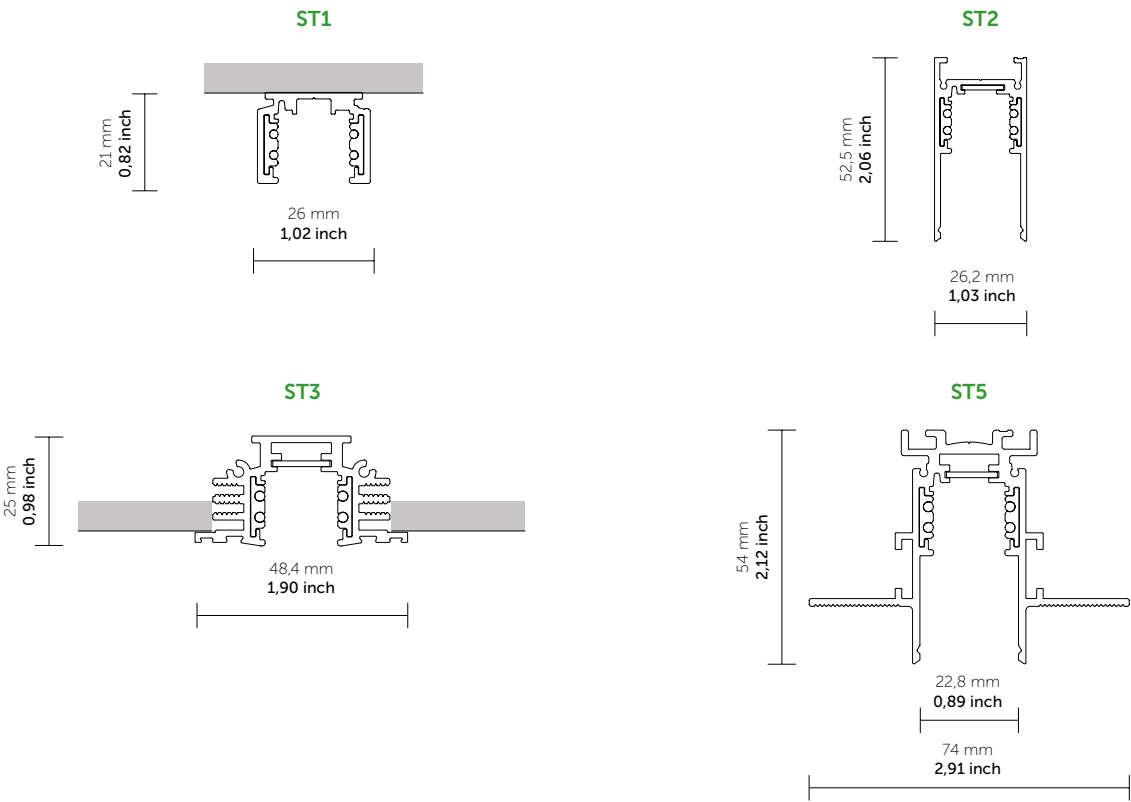

Ordering info

Model	Length	Finish	Version
-----		--	-----
A9500	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	B black W white	-ST1 -ST3 (black color only) -ST2 -ST5 (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		

(*) Track Multisystem 9500 series

Accessories

M 080 48 12
Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Live end

A9501/B
A9501/W

Straight connector

A9503/B
A9503/W

Dead end for ST1/ST6

A9504/ST1-B
A9504/ST1-W

Dead end for ST1/ST6

A9504/ST1-B-F
A9504/ST1-W-F

Dead end for ST3

A9504/ST3-B
A9504/ST3-W

Dead end for ST2/ST5

A9504/ST2-B
A9504/ST2-W

Dead end for ST2/ST5

A9504/ST2-B-F
A9504/ST2-W-F

Suspension for ST1/ST3

A519/3

Suspension for ST2

A619/3

Suspension for ST2

A619/3/B

Suspension for ST5

A819/3/B

For dry location Class2




MAGNETO TRACK

Low voltage track
Low voltage magnetic system Serie 9500 (*)

FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black

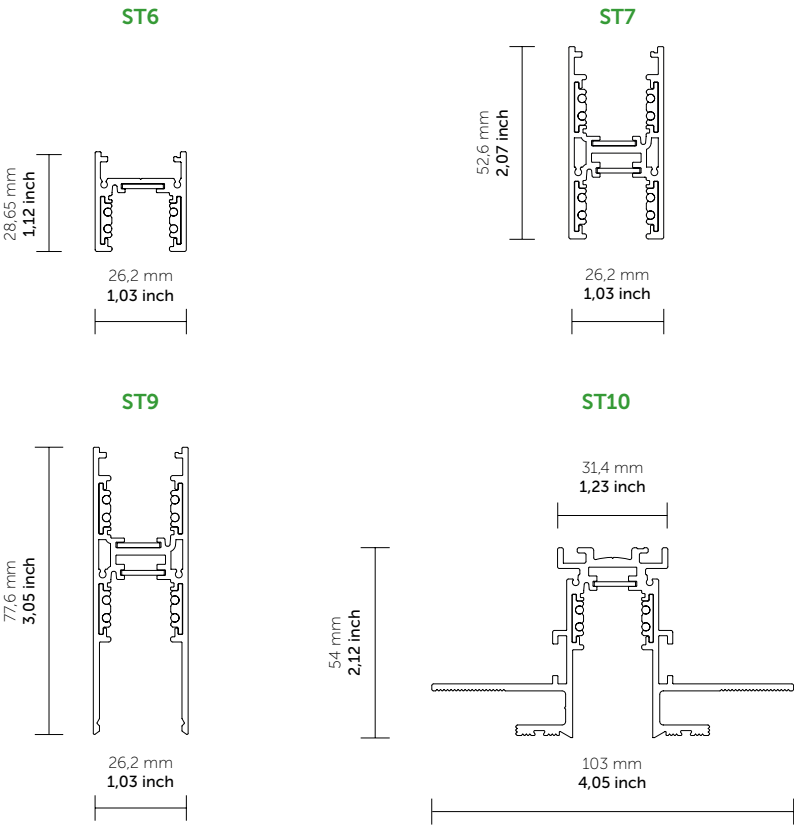

Ordering info

Model	Length	Finish	Version
-----		--	-----
A9500	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	B black W white	-ST6 -ST7 -ST8 (black color only) -ST9 (black color only) -ST10 (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		

(*) Track Multisystem 9500 series

Accessories

M 080 48 12
Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Live end A9501/B A9501/W	Straight connector A9503/B A9503/W	Dead end for ST6 A9504/ST6-B A9504/ST6-W	Dead end for ST6 A9504/ST6-B-F A9504/ST6-W-F
Dead end for ST7/ST10 A9504/ST7-B A9504/ST7-W A9504/ST10-B A9504/ST10-W	Dead end for ST8 A9504/ST8-B A9504/ST8-W	Dead end for ST10 A9504/ST2-B-F A9504/ST2-W-F	Dead end for ST9 A9504/ST9-B A9504/ST9-W
Suspension for ST7/ST9 A919/3/B	Suspension for ST6 A619/3	Suspension for ST8 A419/3/B	Suspension for ST10 A819/3/B

For dry location Class2




2BE

Design: Enrico Corelli

Luminaire with LED lighting system.
Wall-mounted, ceiling, high-bay installation.
Polycarbonate louver protection.

FEATURES

Power (W)	12 - 24 - 30
Installation	Suspension, ceiling, wall
Luminaire housing	Aluminium
Protective screen	Polycarbonate
Finishing	Natural anodised, black anodised
Line voltage	120V 60Hz



TB103 12W

TB104 24W

TB105 30W

For dry location 

W/ft	3000 K CRI 80	4000 K CRI 80
5.5	650 lumens/ft	685 lumens/ft

Ordering info

Model	Color	Lenght	Finish
----	----		--
TB103 12W120V	8030 8040	27,56"	02 black 18 grey Other on request
TB104 24W120V TB105 30W120V		51,18" 62.60"	

Ordering example : TB103 8030 .02

Accessories


TBA01
Bracket for ceiling/wall mounting (white-black-gray)

TBA12
n° 2 steel supporting cables with quick fix system
Length of cables 98,42" (white-black-gray)



FEATURES

Power (W)	12 - 24 - 30
Installation	Suspension, ceiling, wall
Luminaire housing	Aluminium
Protective screen	Polycarbonate
Finishing	Natural anodised, black anodised
Line voltage	120V 60Hz



2BE

Design: Enrico Corelli

Luminaire with LED lighting system.
Wall-mounted, ceiling, high-bay installation.
Polycarbonate louver protection.

TB107 12W

TB108 24W

TB109 30W

For dry location 

W/ft	3000 K CRI 80	4000 K CRI 80
5.5	650 lumens/ft	685 lumens/ft

Ordering info

Model	Adapter	Color	Lenght	Finish
----	-	----		--
TB107 12W120V	X Global(*) XTS compatible	8030 8040	27,56"	02 black 18 grey Other on request
TB108 24W120V			51,18"	
TB109 30W120V			62.60"	

Ordering example : TB103 X 8030 .02

Accessories

TBA13

n° 2 steel supporting cables with quick track fix system
Length of cables 98,42" (white-black-gray)

TBA14

n° 1 steel supporting cables with quick track fix system
n° 1 steel supporting cables with quick ceiling fix system





LINEA DI LUCE

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Ceiling, higt-bay installation.


Optical assembly set back from the edge of the luminaire.

With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

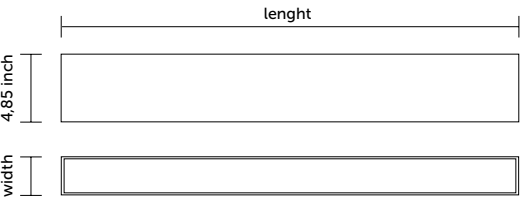

For dry location 

W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM051 20W120V-277V LM052 30W120V-277V LM053 40W120V-277V LM054 50W120V-277V	23,37" 34,65" 45,90" 57,20"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM051 280 8030 SL.01**

Accessories

LM350

N. 2 steel supporting cables with quick fix system
length of cables: 98,42 inch

LM351

N. 2 ceiling mounting brackets



LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Ceiling, high-bay installation.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

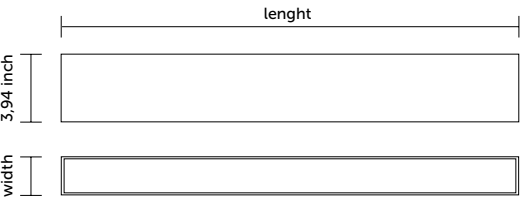

For dry location 

W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM061 20W120V-277V LM062 30W120V-277V LM063 40W120V-277V LM064 50W120V-277V	23,37" 34,65" 45,90" 57,20"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request


Ordering example: **LM061 280 8030 SL.01**

Accessories

LM350
N. 2 steel supporting cables with quick fix system
length of cables: 98,42 inch

LM351
N. 2 ceiling mounting brackets



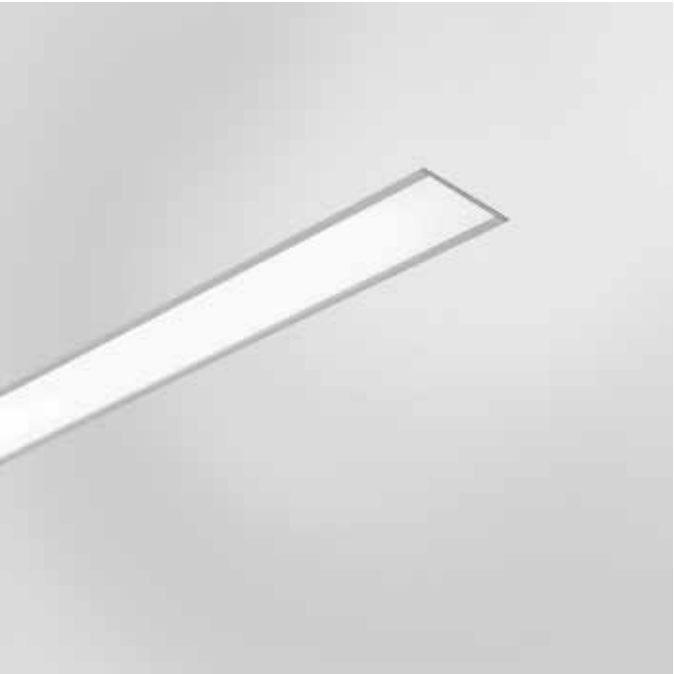

LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

- Luminaire with LED lighting system.
- Recessed installation.
- Outer edge with profile.
- Front louver flush the luminaire.
- Bracket for plasterboard mounting.
- With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

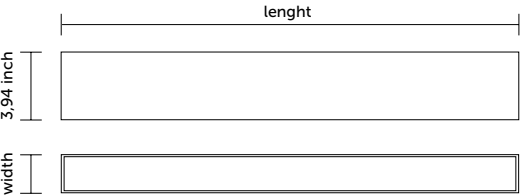

For dry location 

Ceiling Cut-out




W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM071 20W120V-277V LM072 30W120V-277V LM073 40W120V-277V LM074 50W120V-277V	22,70" 33,98" 45,26" 56,54"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

Ordering example: LM071 339 8030 SL.01

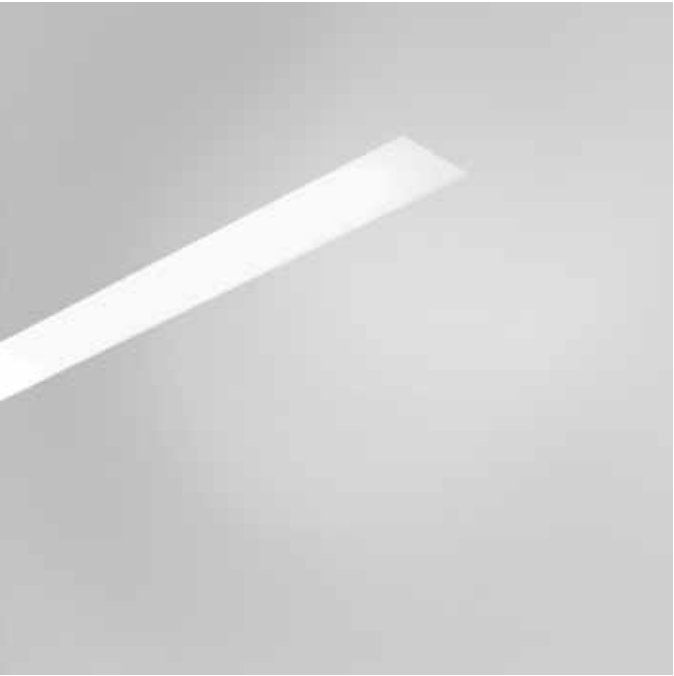

LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Recessed installation.
Without the outer edge.
Front louver flush the luminaire.
Bracket for plasterboard mounting.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Suspended / Surface
Luminaire housing	Recessed
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

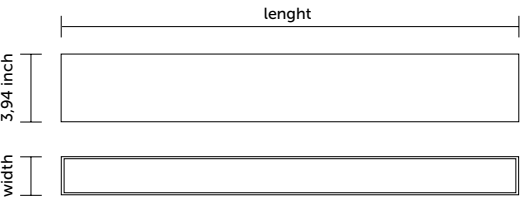

For dry location 

Ceiling Cut-out


 101 mm
3,98 inch
+5 mm
A +0,20 inch

W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM081 20W120V-277V LM082 30W120V-277V LM083 40W120V-277V LM084 50W120V-277V	22,70" 33,98" 45,26" 56,54"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: LM081 280 8030 SL.01

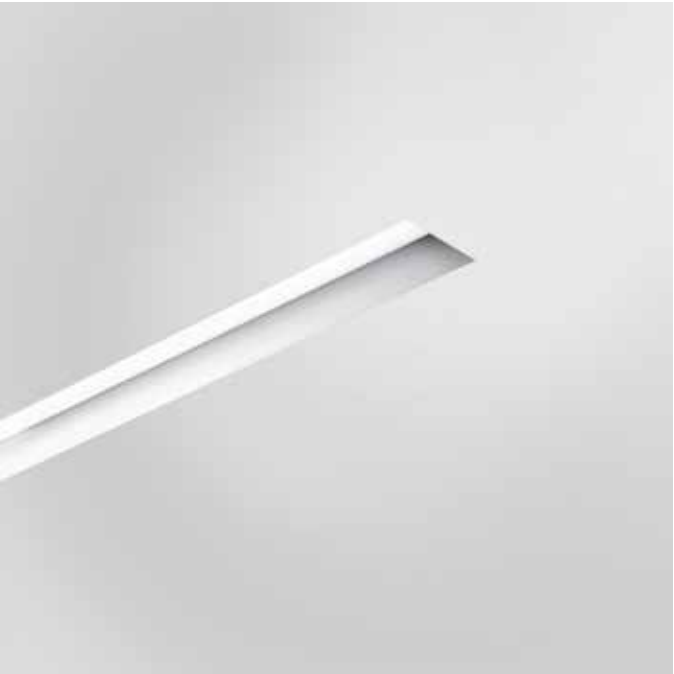

LINEA DI LUCE

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Recessed installation.

Without the outer edge.

Optical assembly set back from the edge of the luminaire.


Bracket for plasterboard mounting.

With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

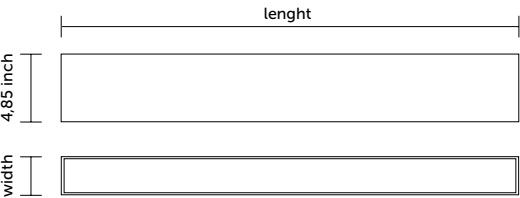

For dry location 

Ceiling Cut-out



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM091 20W120V-277V LM092 30W120V-277V LM093 40W120V-277V LM094 50W120V-277V	22,70" 33,98" 45,26" 56,54"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM091 280 8030 SL.01**





LINEA DI LUCE suspended system

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Modular systems.

Ceiling, high-bay installation.


Optical assembly set back from the edge of the luminaire.

With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminumLight sources LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

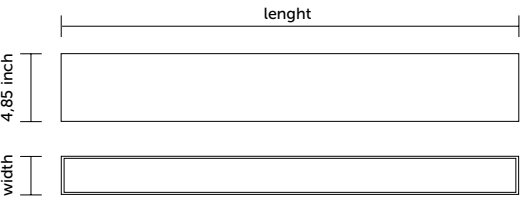

For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

L1 Beginning module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM101 20W120V-277V LM102 30W120V-277V LM103 40W120V-277V LM104 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM161 20W120V-277V LM162 30W120V-277V LM163 40W120V-277V LM164 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM101 280 8030 SL.01**

Accessories

LM350

N. 2 steel supporting cables with jack and ceiling rose.

LM351

N. 1 kit (contains two supports)

LM353

Mechanical Connection

LM356

N°1 Still supporting cable

LM358

N°2 Side cap for line (0,394 inch)



LINEA DI LUCE suspended system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Ceiling, high-bay installation.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

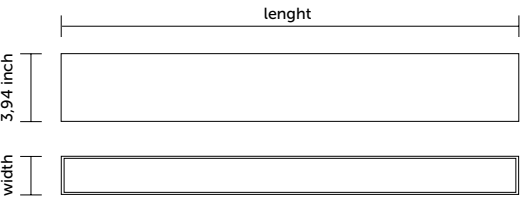

For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM121 20W120V-277V LM122 30W120V-277V LM123 40W120V-277V LM124 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM171 20W120V-277V LM172 30W120V-277V LM173 40W120V-277V LM174 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM121 280 8030 SL.01**

Accessories

LM350

N. 2 steel supporting cables with jack and ceiling rose.

LM351

N. 1 kit (contains two supports)

LM353


Mechanical Connection

LM356

N°1 Still supporting cable

LM357

N°2 Side cap for line (0,394 inch)

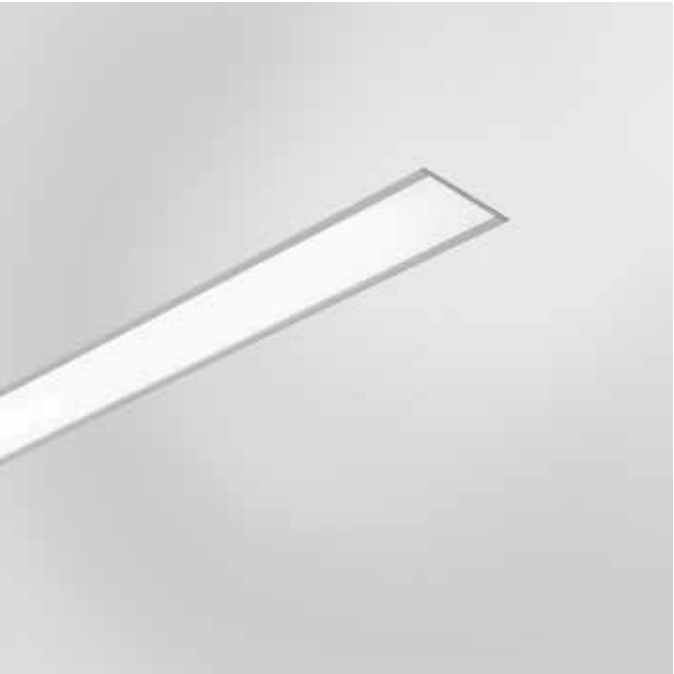

LINEA DI LUCE recessed system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Outer edge with profile.
Front louver flush the luminaire.
Bracket for plasterboard mounting.
With electronic ballast.


FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

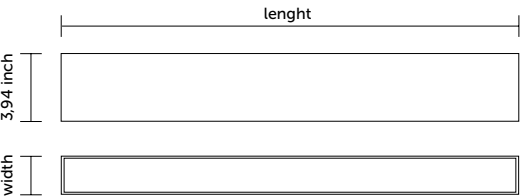

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM131 20W120V-277V LM132 30W120V-277V LM133 40W120V-277V LM134 50W120V-277V	22,58" 33,86" 45,14" 56,42"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM181 20W120V-277V LM182 30W120V-277V LM183 40W120V-277V LM184 50W120V-277V	22,58" 33,86" 45,14" 56,42"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM131 339 8030 SL.01**

Accessories

LM353
Mechanical connection

LM354
N°2 Side cap for line (0,079 inch)

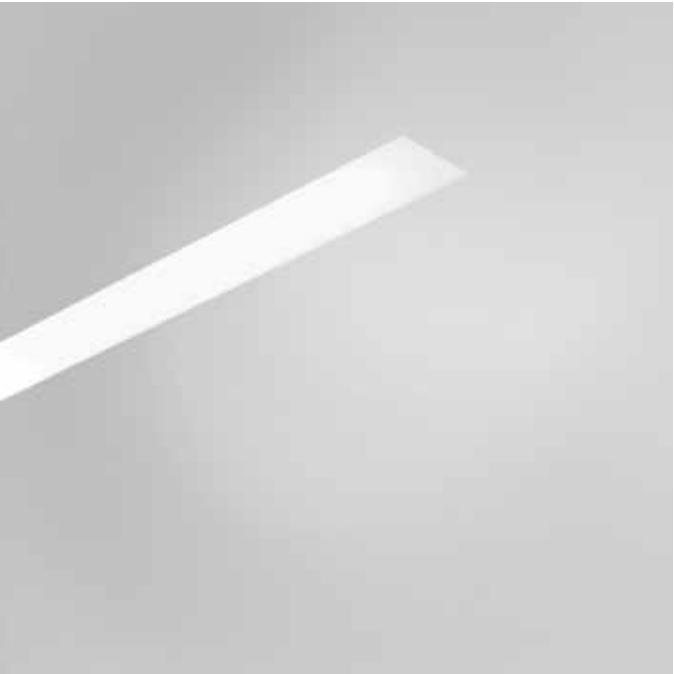

LINEA DI LUCE recessed system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Without the outer edge.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

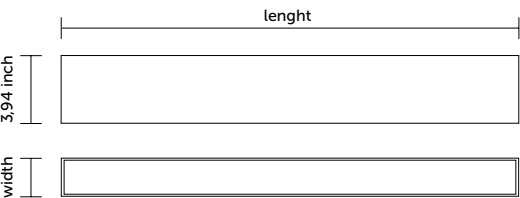

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM141 20W120V-277V LM142 30W120V-277V LM143 40W120V-277V LM144 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM191 20W120V-277V LM192 30W120V-277V LM193 40W120V-277V LM194 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM141 280 8030 SL.01**

Accessories

LM353
Mechanical connection

LM355
N°2 Side cap for line (0,079 inch)

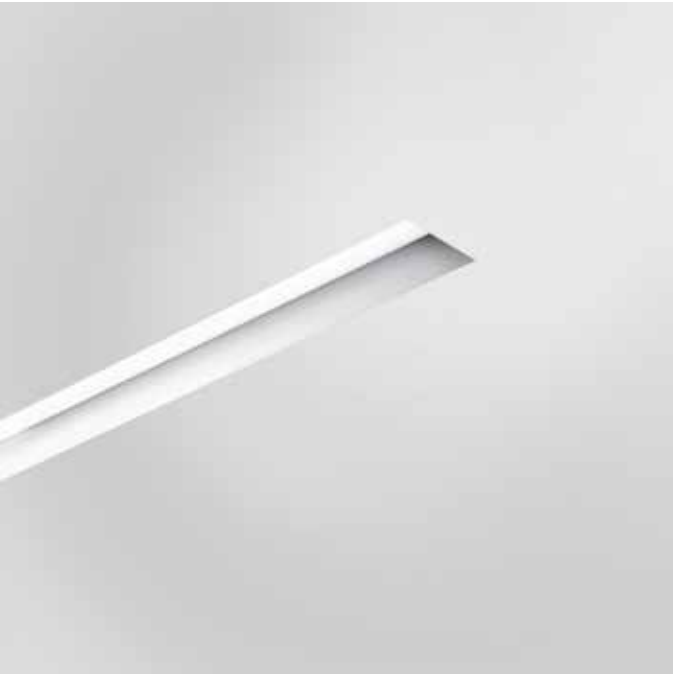

LINEA DI LUCE trimless recessed system

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Modular systems.

Recessed installation.

Without the outer edge.


Optical assembly set back from the edge of the luminaire.

With electronic ballast.


FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Trimless recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz - Dimmable 0 - 10V 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

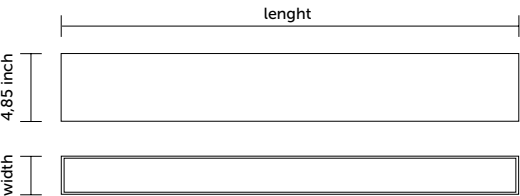

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM151 20W120V-277V LM152 30W120V-277V LM153 40W120V-277V LM154 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM201 20W120V-277V LM202 30W120V-277V LM203 40W120V-277V LM204 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM151 280 8030 SL.01**

Accessories

LM353
Mechanical connection

LM352
N°2 Side cap for line (0,079 inch)

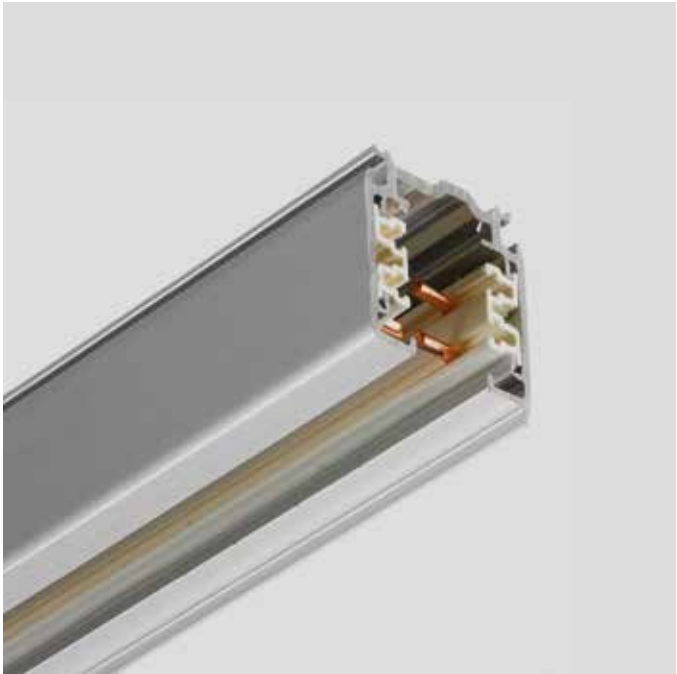


TRACK
20 Amps 120V 2 circuit / 2
neutral

Design: GLOBAL


Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



TEK

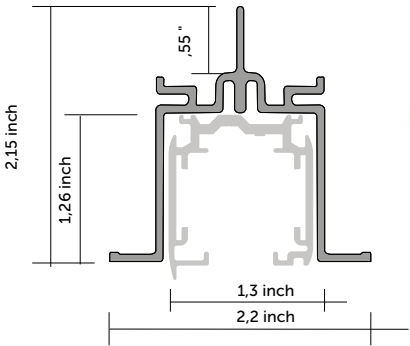

FTP

For dry location 

Ordering info

Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
TEK44 TEK48 TEK412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white


Ordering example: suspended / surface **TEK44 1**

Ordering example: recessed **TEK44 1 + FTP44 2**



- TEK11
- TEK12
- TEK14
- TEK34
- TEK24
- TEK39
- TEK40
- TEK38
- TEK21
- TEK41
- SKB12
- SKB34
- SKB34/3
- SKB30


Accessory wiring diagram

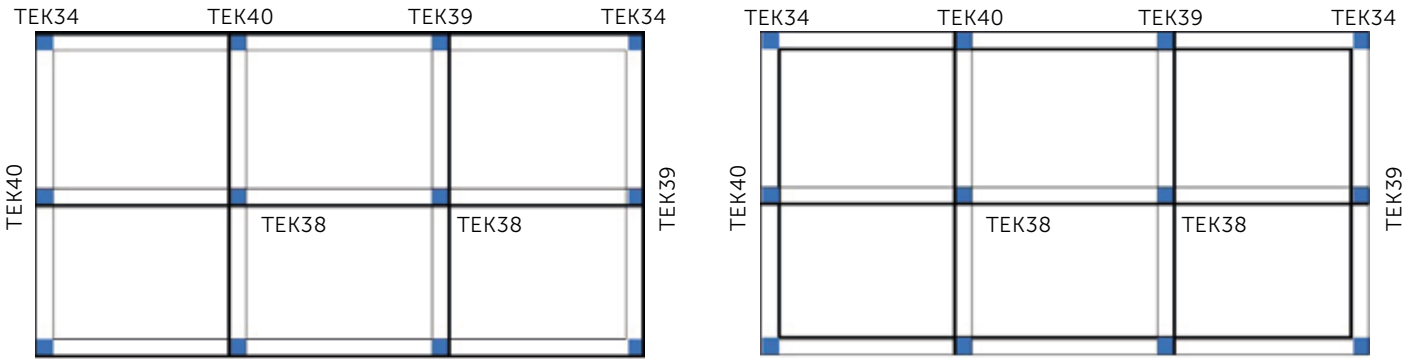

Components

Model	Finish	Additional Accessories
-----	--	
TEK11 live end feed TEK21 linear coupler TEK 14 live middle feed TEK34 feedable L-connector adjustable polarity TEK 39 feedable T-connector adjustable right polarity TEK 40 feedable T-connector adjustable left polarity TEK38 feedable X-connector TEK41 dead ends TEK24 adjustable connector	2 black 3 white	GES15 outlet box cover TEK41 recessed end cup SKB12-1 ceiling clamp SKB34 sospension wire 5 feet SKB34/3 sospension wire 9 feet XTSV12-1 bending tool

Ordering example: **XTS11 2**

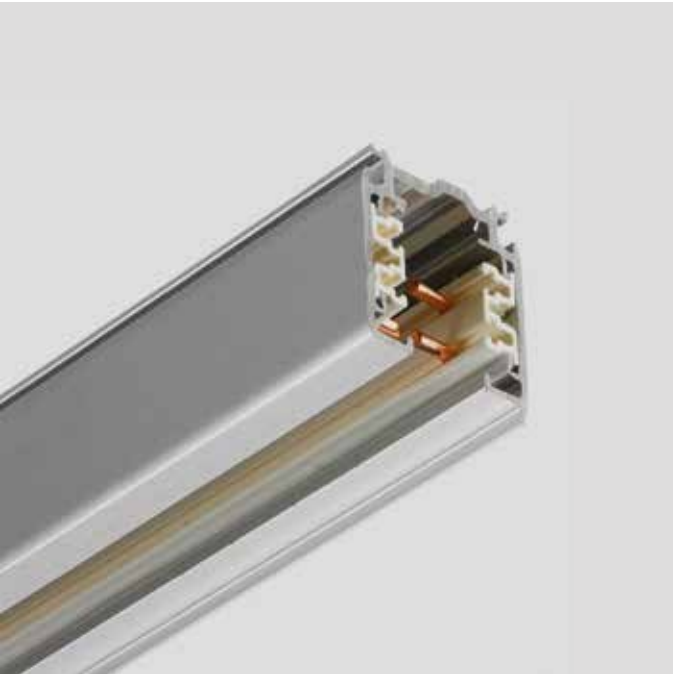


TRACK
3 circuit 120V

Design: GLOBAL


Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



XTS

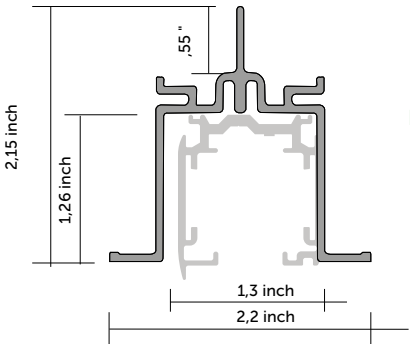

FTP

For dry location 

Ordering info


Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44 XTS48 XTS412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**



Accessory wiring diagram

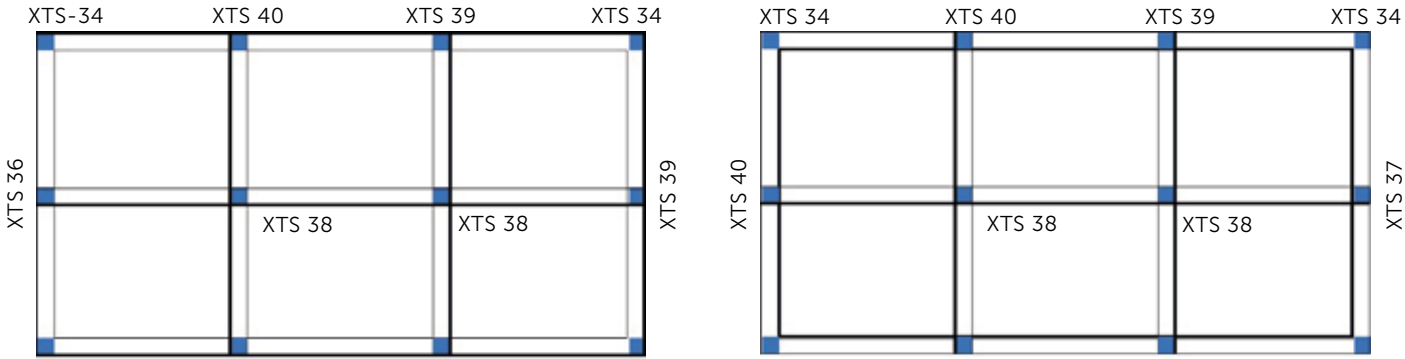

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**




TRACK 1 circuit 120V

Design: GLOBAL

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Without the outer edge.
Optical assembly set back from the edge of the luminaire.
With electronic ballast.

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



GES

For dry location 


Ordering info

Model	Length	Finish
-----		--
GES204 GES208 GES212	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: **GES204 1**




Accessory wiring diagram

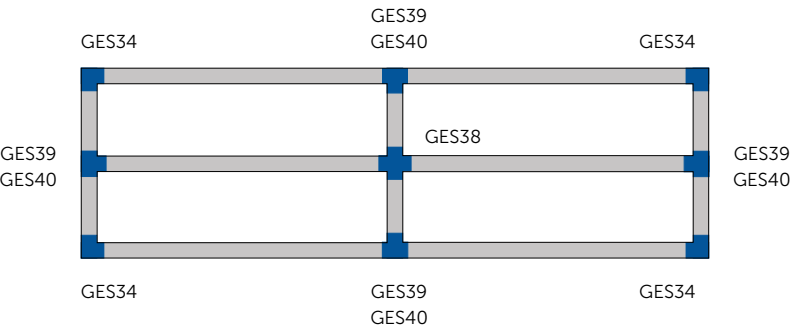

Components

Model	Finish	Additional Accessories
-----	--	
GES11 end feed left GES14 center feed GES15 outled box cover GES17 t-bar feed kit GES21 straight connector GES23 straight connector GES34 L connector adjustable GES38 X connector GES40 T connector adjustable GES41 dead end GES67 floating feed GES70 monopoint canopy GEA10 universal stem suspension point GEA11 end feed stem suspension point GEA3712 12" steam kit includeas steam and canopy GEA3718 18" steam kit includeas steam and canopy GEA3724 24" steam kit includeas steam and canopy GEA3748 48" steam kit includeas steam and canopy	1 aluminium 2 black 3 white GEA COD. Only -2=black -3 =white	GEA21 track reinforcement plate GEA6 thread rod mounting clip GEA7 t-bar mounting clip

Ordering example: **GES11 2**

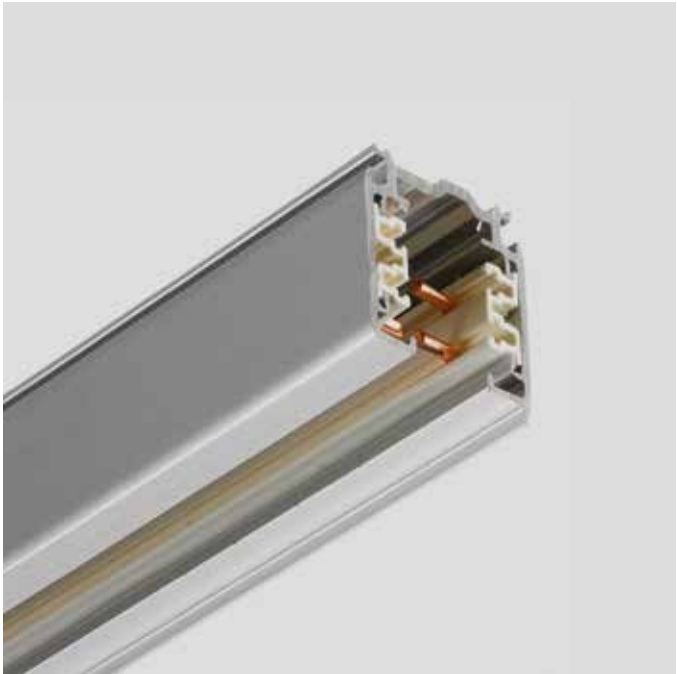


TRACK 3 circuit 120V

Design: STUCCHI


Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



A9000 ST




A9000 R

For dry location 


Ordering info

Model	Length	Finish	Version
-----		--	
A9000-UL4 A9000-UL8 A9000-UL12	4'(48") 8(96") 12'(144")	G aluminium B black W white	ST-120 R-120

Ordering example: suspended / surface **A9000-UL4/B-ST-120**
Ordering example: recessed **A9000-UL4/B-R-120**

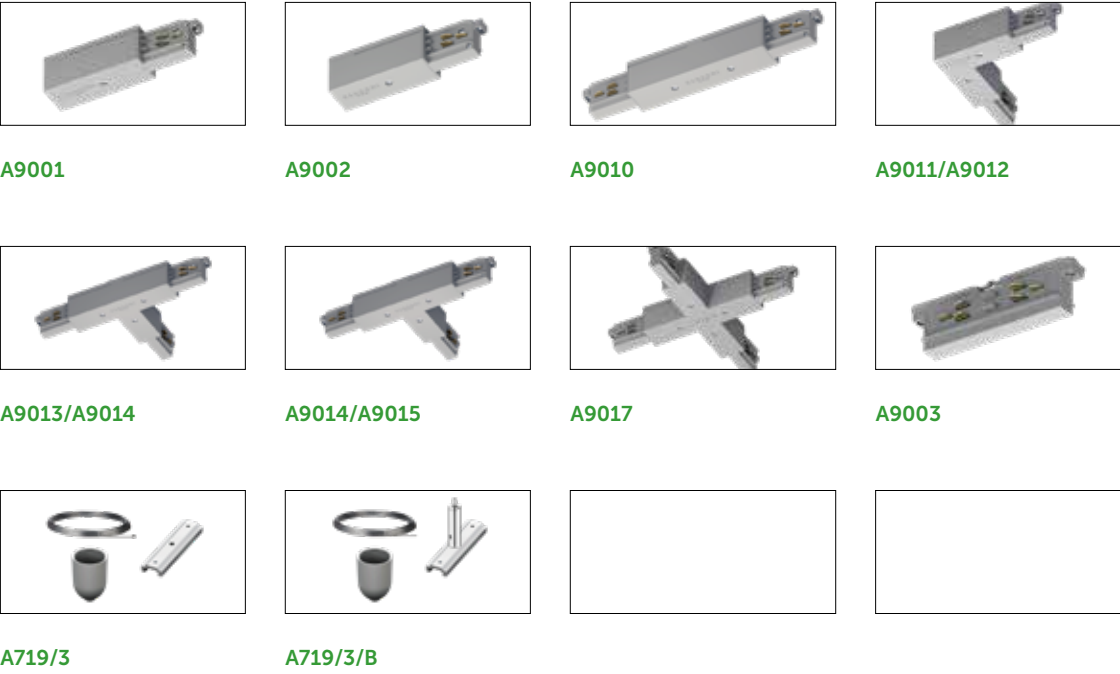

Accessory wiring diagram

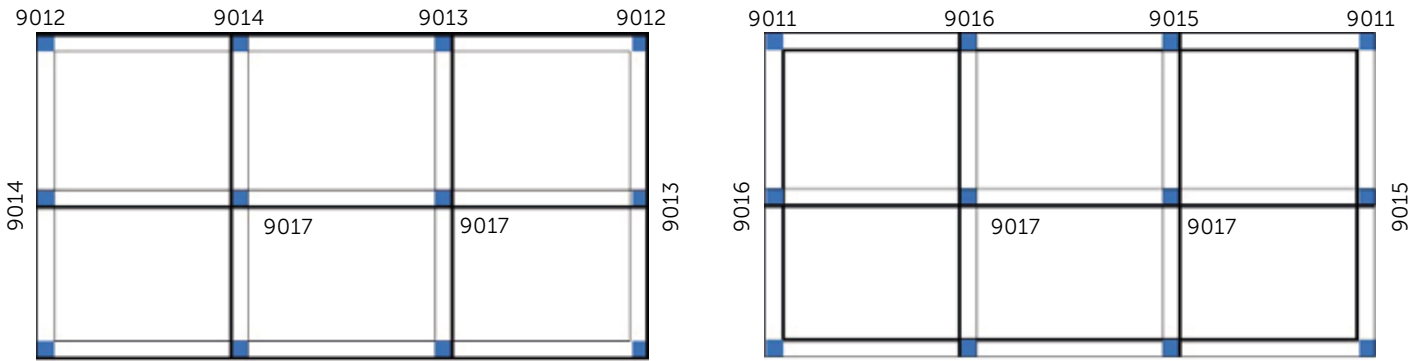

Components

Model	Finish	Additional Accessories	Finish
-----	--		
A9001 end feed A9002 end feed A9010 center feed A9003 straight connector A9011-A9012 L connector A9017 X connector A9015-9016 T connector inside A9014-9013 T connector outside A9004-9004R dead end	G aluminium B black W white	S9000/T bending tool S9001-R/6 cover recessed track S9010-R/6 cover recessed track S9011-R/6 cover recessed track S9013-R/6 cover recessed track S9016-R/6 cover recessed track S9017-R/6 cover recessed track	G aluminium B black W white

Ordering example: **A9001/B-3C**



phone: 347 613 5772