



www.quattrobi.net



lighting designed and made in italy

2025.03

www.quattrobi.net



25

2

QUATTROBI

Index

The Company	6
Production	8
Datasheets	30



Quattrobi Inc.
2003 NW Royal Fern CT
Palm City, FL 34990

P: **347 613 5772**

www.quattrobi.net
E: info@quattrobi.net

Graphic design **Artur Dudka**
Photo **Alessandro Gaja, Massimiliano Biffi, Artur Dudka**

"I founded Quattrobi with courage and passion, the same values I continue to have now with my sons."

"Ho fondato Quattrobi con coraggio e passione, gli stessi valori che porto avanti oggi con i miei figli."

Rino Biffi



The Company


Established in 1999 near Milan, Italy by Rino Biffi, Quattrobi took advantage of the long term experience of the founder in the world of lighting technology. Now the company is managed by the next generation to ensure continuity of the family business.

A state-of-the-art factory extends over an area of 64,000 sq.ft and is fully vertically integrated. In house metal parts bending, milling, aluminum extrusion cutting and powder coating are all available as standard. This allows Quattrobi to have short lead times and good flexibility in terms of customization.

Our company's mission is to design high performance and quality architectural lighting fixtures to fulfill the needs of the Architectural & Design community. Passion, commitment, and sustainability will always guide us in the development of high-performance lighting fixtures for all applications.



Production *Produzione*

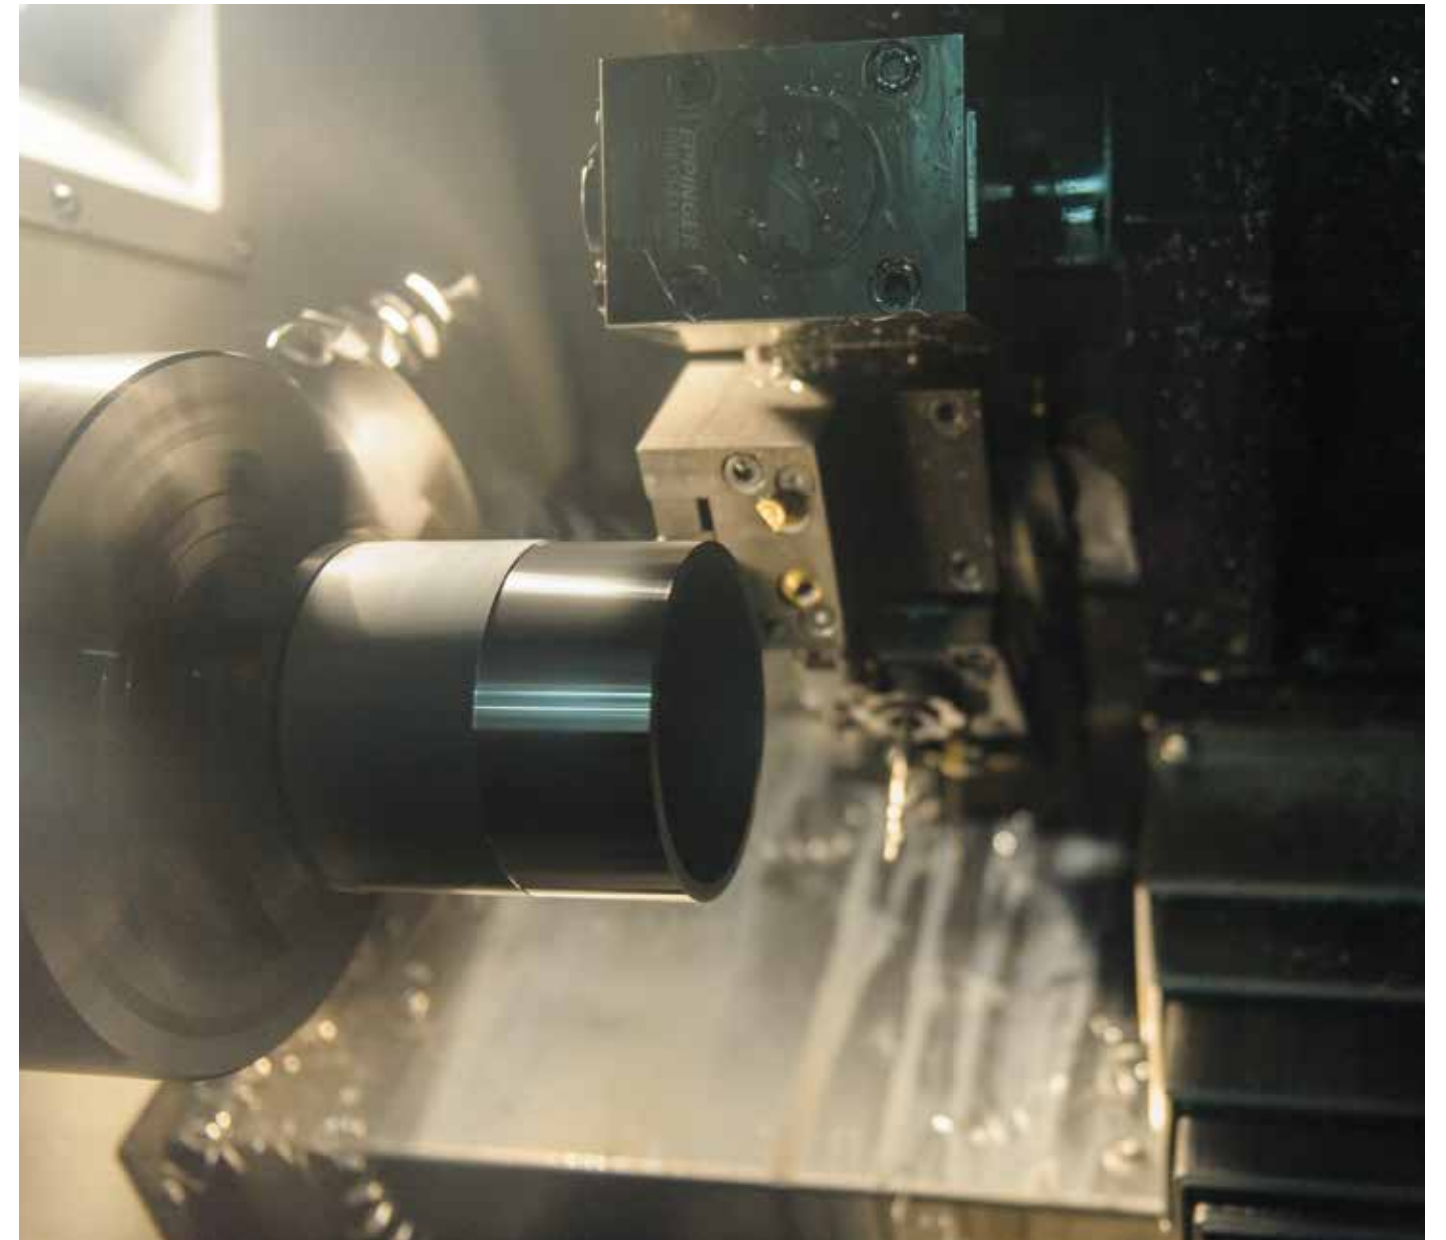

1. Lighting fixture housing while lathe machining (Kor)
Lavorazione al tornio del corpo lampada (Kor)
2. Cutting of the lighting fixture housing (Kor) from aluminum tube
Taglio del corpo lampada (Kor) da tubo in alluminio





1. Cleaning of the sink after the milling operation (Max)
Pulitura del dissipatore dopo l'operazione di fresatura (Max)

2. Milling of the heatsink (Max)
Fresatura del dissipatore (Max)





1. Deburring of parts (Max)
Molatura dei pezzi (Max)
2. TIG welding (Tungsten Inert Gas) (Max)
Saldatura a TIG (Tungsten Inert Gas) (Max)





Aluminum extrusions cutting (Max - Kor)
Taglio di estrusi di alluminio (Max - Kor)




1. Polishing of the lighting fixture body (Kor)
Lucidatura del corpo lampada (Kor)

2. Laser cutting of an 0.8mm thick iron plate
Taglio laser su lastra di ferro spessore 0,8mm





Components separation after the laser cutting (Kor)
Separazione dei componenti dopo il taglio laser (Kor)

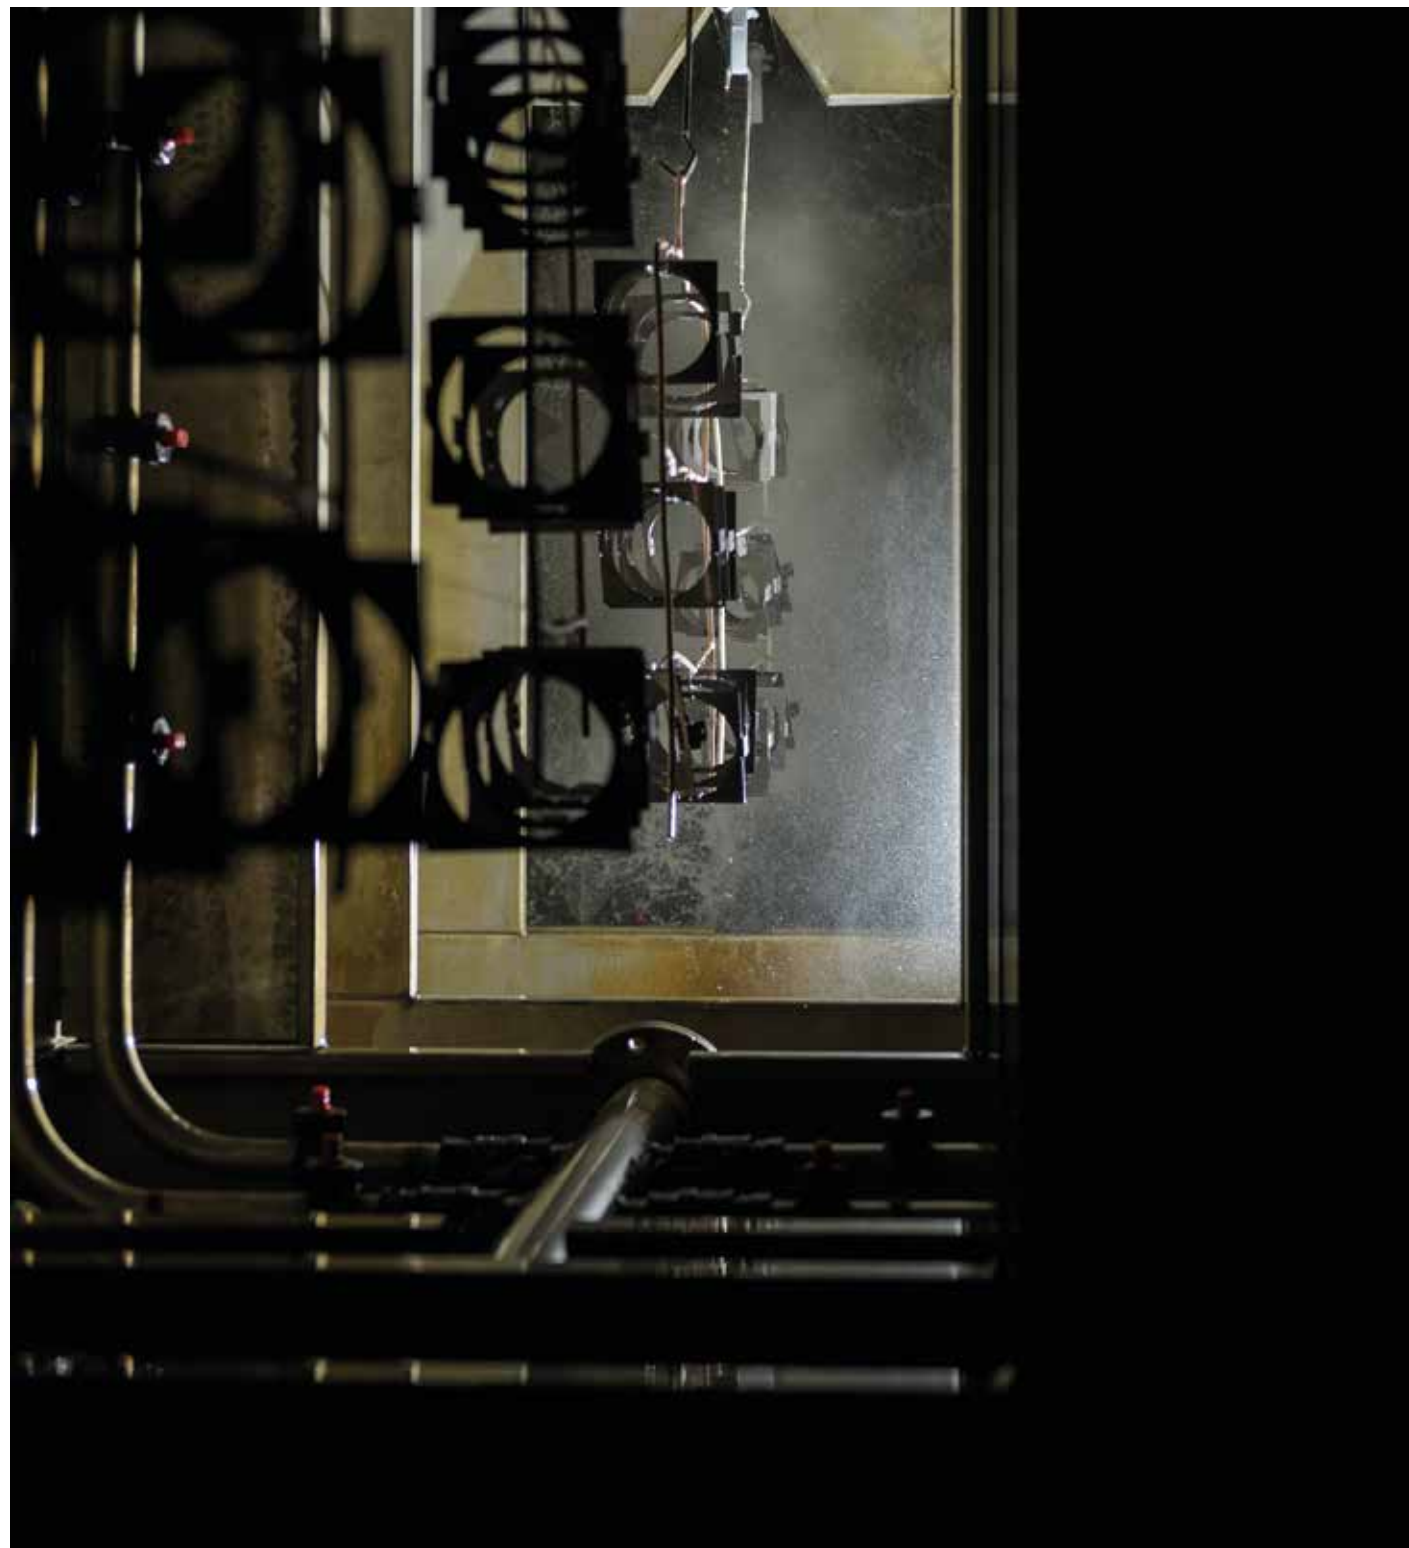

1. Degreasing operations for painting (Macroquadro)
Operazioni di sgrassaggio per la verniciatura (Macroquadro)

2. Powder coating finishing (Macroquadro)
Verniciatura a polvere rifinitura (Macroquadro)





1. Assembly line
Linea di montaggio
2. Powder coating. Preparation (Max - Kor)
Verniciatura a polvere. Preparazione (Max - Kor)





FOOD LED SYSTEM

Food LED System (FLS) is a high-performance LED system designed to beautifully light meat as well as seafood, fruits, vegetables, dairy and bakery products.

Food lighting

Lighting determines how the customer perceives the food on display, and the more a LED can enhance its colors, the more the product can look fresh and appealing.

A regular LED can usually enhance the colors of just one food type, so most of the time, you end up lighting each area of the store with a different LED.

What happens then is that a customer moving from one area to another most likely will experience unpleasant color shifts, from the pink tones of the meat area to the yellows of the bread area or the blues of the fish area.

And changing store layout becomes an overly complicated process, especially when you have to identify many different LEDs and reposition them according to food type.


One for all

Our system is a paradigm shift in how food lighting is done.

We designed a high-performance LED that can enhance the colors of all food types and enables you to have one lighting solution for the entire store.


Food LED System (FLS) is the perfect one-for-all solution for food lighting.

High performance

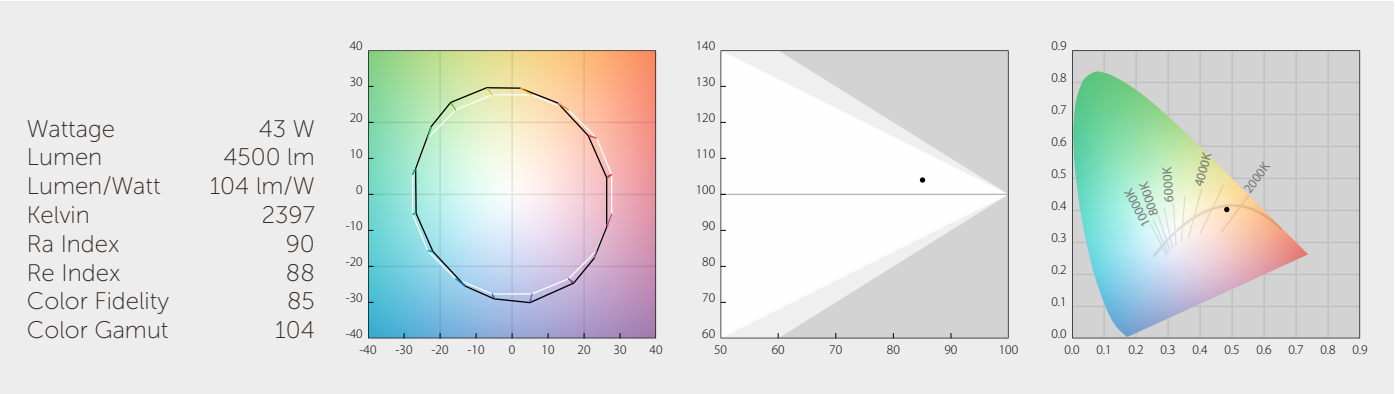

White point

Our high-performance LED has a Color Temperature of 2400 K with a pure White Point, very close to its theoretical values. While regular LEDs with the same Color Temperature often have a White Point deviated towards yellow.

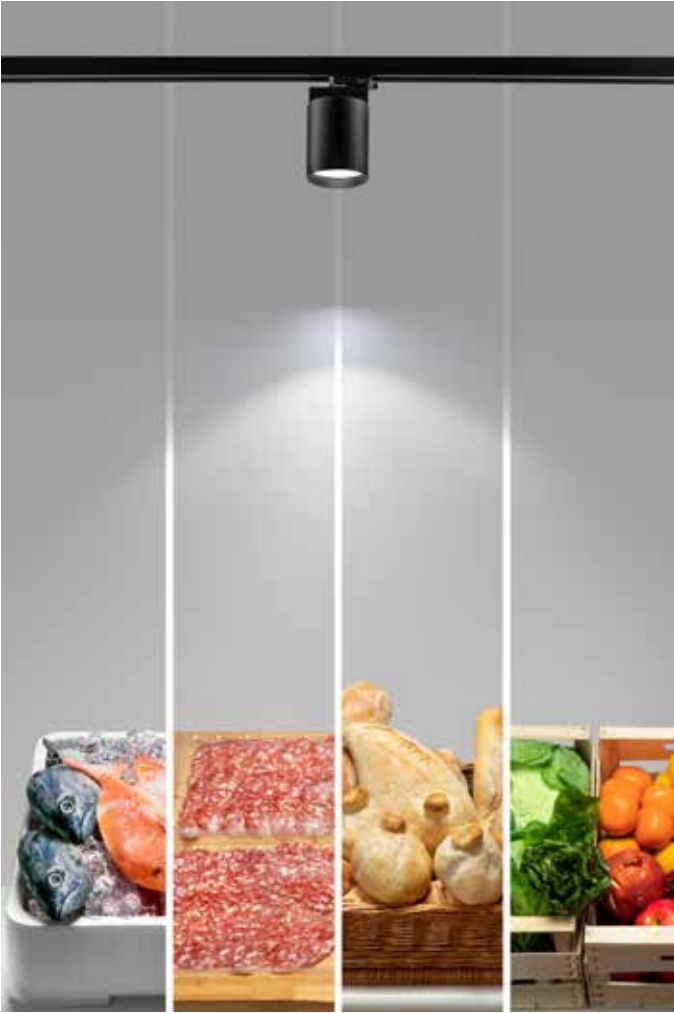


Facility management

Our system makes facility management easier than before since you have to keep track of just one Quattrobi Product Code throughout all your documentation.

And when you need to change store layout, you no longer have to identify many different LEDs and reposition them according to food type. You already have our high-performance LED in every area, and it can enhance the colors of all food types.

LIGHT SOURCES

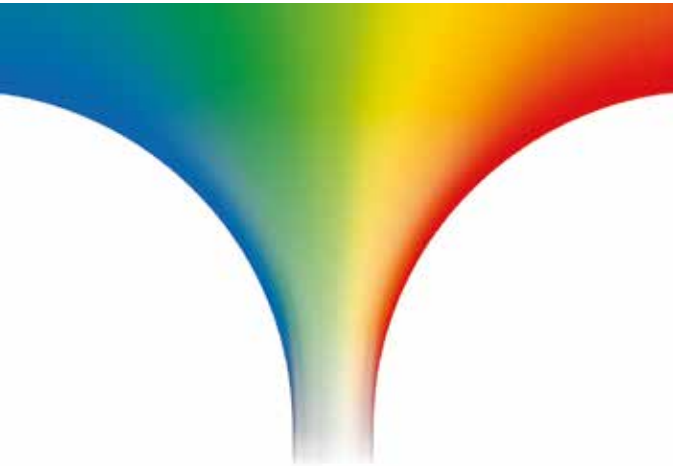

CRIMAX

CRIMAX is a LED that offers the best color reproduction, with a CRI rating above 97 and outstanding TM-30 metrics. This makes it the only recommended option for situations where accurate, vivid, and consistent color reproduction is crucial.

F90

F90 is an energy efficient LED that offers both high light output and natural color reproduction, with a CRI rating of 90. This means that you can use fewer lighting fixtures and still have a well-lit space with accurate colors.

Typically, as the CRI rating increases, the light output decreases. However, this is not the case with F90, as it emits the same quantity of light as a CRI 80 LED, but with the quality of a CRI 90.

FLS

Food Led System

CRI MAX

Crimax

F90

F90

WIRELESS CONTROLS

We have partnered with Casambi to introduce state-of-the-art wireless lighting controls in our LED luminaries.

Essentials

The system gives you complete control over each fixture through a mobile device. You can turn the light on and off, dim it, change its hue, saturation, and color temperature.



Switch



Dimmer



Hue/Saturation



Color Temperature




Group

You can also control multiple fixtures at once by defining a lighting group. This feature can dramatically speed things up, especially when you can manage your entire store's lighting with just a few groups.

Advanced

The system allows you to save any adjustments made to the dimming levels and colors of the fixtures into lighting scenes and switch seamlessly between them.



Scenes



Animations



Timer

You can create animations to make static light come alive. This feature allows you to change dimming levels and colors according to a rhythm and define a sequence of scenes to evoke an atmosphere. In addition, you can instruct the system to switch scenes or play animations at a specific time and date and repeat these changes regularly every year, month, day, or even hour.




Display window application

With this system, the lighting of your display window can always have the right atmosphere.

You can define multiple lighting scenes K serie 9500, typically one for each season, and then instruct the system to switch them at the appropriate date. Once you set it up, you can forget about it.

Is it just me, or does it look like our fixtures can relieve some of the pressure during seasonal inventories and restocks?

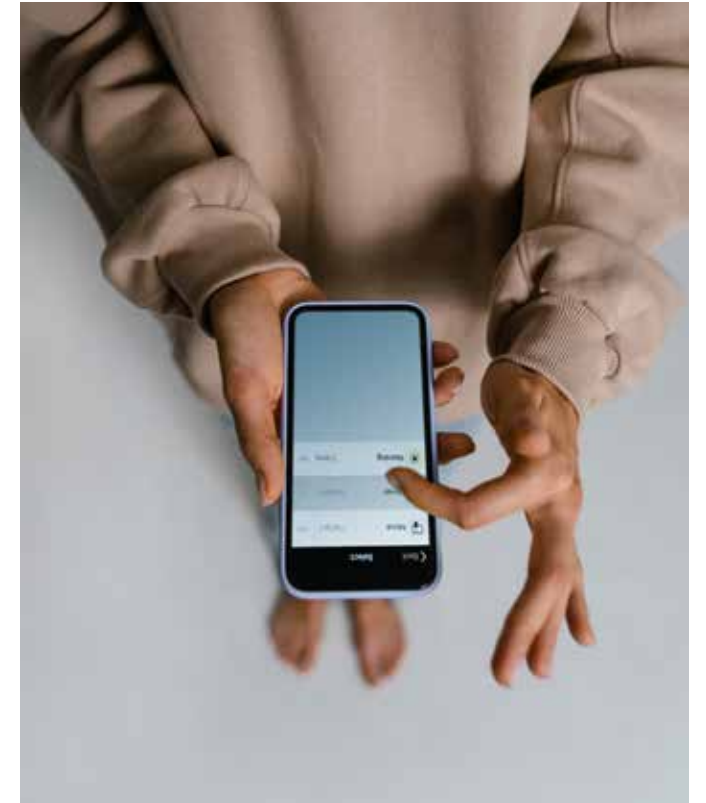

Fitting room application

With this system, you can give control of the fitting room's lighting to the customer through a familiar mobile device that lets him change dimming level and color temperature.

You can further simplify the experience with ready-to-use lighting scenes that allow the customer to see how the dress would look in different places like home, office, or restaurant.

Reducing customer uncertainty is the reason why you have a fitting room in the first place, right?

CASAMBI

Casambi is a wireless lighting control system based on Bluetooth Low Energy (BLE).


The system provides a mesh network of inter-operable devices that you can use to wireless control your luminaries.

All you need to use the system is a tablet or a smartphone with the Casambi App installed.

Via the app, you can configure luminaries, schedule lighting operations, perform diagnostics, and always have remote access to the mesh network.

You can find out more on casambi.com

Available only for the EMA Family. Inquire for details

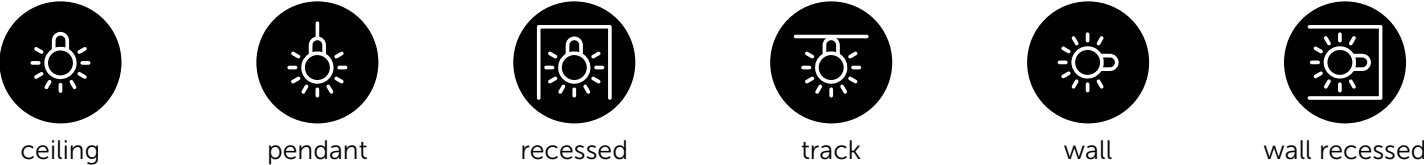

Datasheets

AX60	32	
AX76	36	
AX95	38	
KOR	42	
MISSING	62	
INNER	68	
MAX	74	
MINI MAX	76	
PHOTO	80	
SAM 95	86	
SPINNER	90	
SUNLIGHT	94	
ENRI	142	
SMOKE	150	
POP 60	164	
PENNA	168	
MEDUSA	174	
INK	176	
MINI INK	178	
EMA	180	
EMA LINE	200	
EMA TRACK	226	
²BE	240	
LINE	244	
BRILLIANT BOX	250	
LINEA DI LUCE	258	
TRACK	282	



AX60



Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.



FEATURES

Power (W)	10 - 15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0-10 V dimming 1% dimming (dimmable versions only)

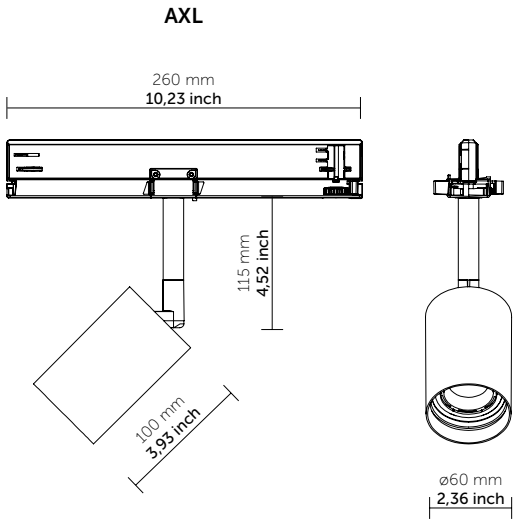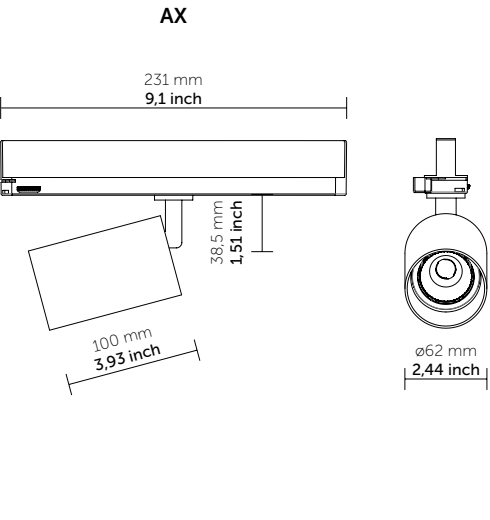

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX100 10W AXL00 10W

1125 lm - 80 CRI - 3000K
1165 lm - 80 CRI - 3500K
1185 lm - 80 CRI - 4000K
900 lm - 90 CRI - 2700K
955 lm - 90 CRI - 3000K
965 lm - 90 CRI - 3500K
827 lm - 97 CRI - 3000K

775 lm - CRIMAX - 2700K
824 lm - CRIMAX - 3000K
844 lm - CRIMAX - 3500K
869 lm - CRIMAX - 4000K

1125 lm - F90 CRI - 3000K
1165 lm - F90 CRI - 3500K
1185 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

AX101 15W AXL01 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

AX102 22W AXL02 22W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

For dry location


Ordering info

Model	Adapter	Cri/Color	Beam	Driver/Dimmer	Finish
----	-	----	-	-	--
AX100 10W 120V AXL00 10W 120V AX101 15W 120V AXL01 15W 120V AX102 22W 120V AXL02 22W 120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	A 0-10V	01 white 02 black 18 grey Other on request


Ordering example : **AX101 S 8030 M A 01** For track info see page 282

Accessories


SN60 .01 / .02 / .03
Accessory Snoot



HC60 .02
Accessory Honeycomb



EL60 .02
Accessory Elliptical Lens







AX76


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.



FEATURES

Power (W)	10 - 15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0- 10 V dimming 1% dimming (dimmable versions only)

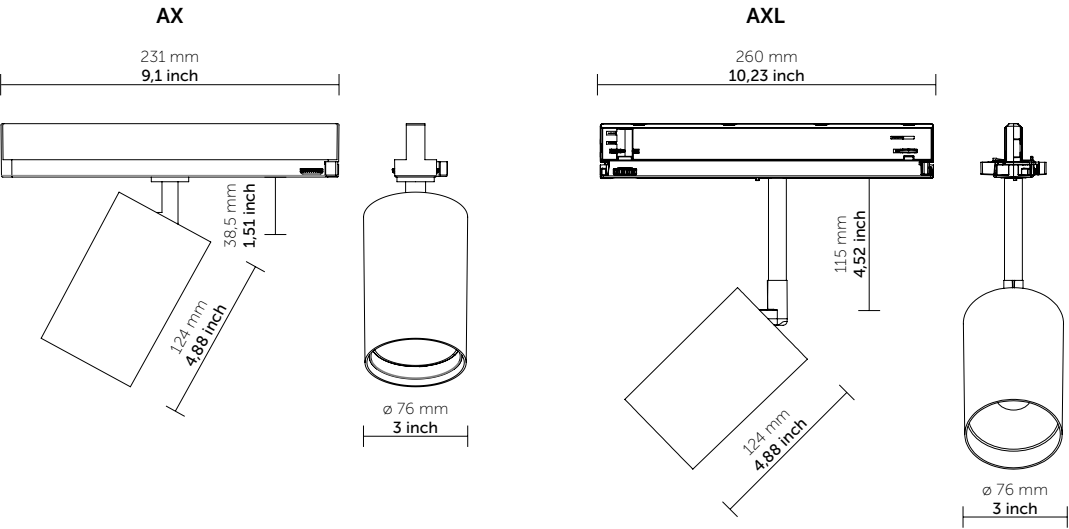

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX104 10W AXL04 10W

1125 lm - 80 CRI - 3000K
1165 lm - 80 CRI - 3500K
1185 lm - 80 CRI - 4000K
900 lm - 90 CRI - 2700K
955 lm - 90 CRI - 3000K
965 lm - 90 CRI - 3500K
827 lm - 97 CRI - 3000K

775 lm - CRIMAX - 2700K
824 lm - CRIMAX - 3000K
844 lm - CRIMAX - 3500K
869 lm - CRIMAX - 4000K

1125 lm - F90 CRI - 3000K
1165 lm - F90 CRI - 3500K
1185 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

AX105 15W AXL05 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

AX107 22W AXL07 22W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Driver/Dimmer	Finish
----	-	----	-	-	--
AX104 10W 120V AXL04 10W 120V AX105 15W 120V AXL05 15W 120V AX107 22W 120V AXL07 22W 120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	A 0 -10V	01 white 02 black 18 grey Other on request

Ordering example : **AX105 S 8030 M A 01**

For track info see page 282



AX95



Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	10 - 15 - 22 - 30
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version ONETRACK(*) compatible;
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	0- 10 V dimming 1% dimming (dimmable versions only)

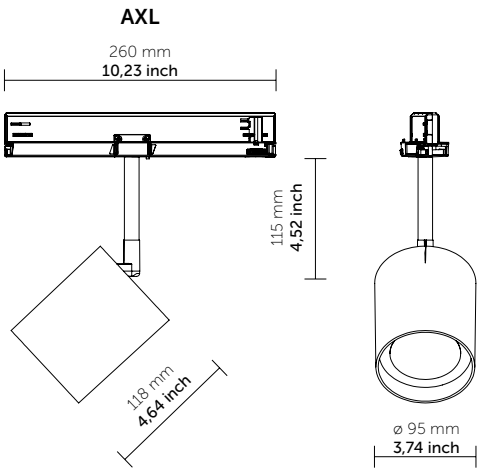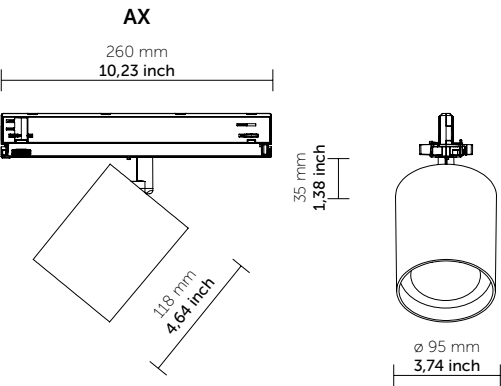

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of STUCCHI

AX110 10W AXL10 10W	AX111 15W AXL11 15W	AX113 22W AXL13 22W	AX117 30W AXL17 30W
1125 lm - 80 CRI - 3000K 1165 lm - 80 CRI - 3500K 1185 lm - 80 CRI - 4000K 715 lm - 90 CRI - 2400K (FLS) 900 lm - 90 CRI - 2700K 955 lm - 90 CRI - 3000K 965 lm - 90 CRI - 3500K 827 lm - 97 CRI - 3000K	1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K	2880 lm - 80 CRI - 3000K 2946 lm - 80 CRI - 3500K 3035 lm - 80 CRI - 4000K 2184 lm - 90 CRI - 2400K (FLS) 2304 lm - 90 CRI - 2700K 2390 lm - 90 CRI - 3000K 2419 lm - 90 CRI - 3500K 2117 lm - 97 CRI - 3000K
775 lm - CRIMAX - 2700K 824 lm - CRIMAX - 3000K 844 lm - CRIMAX - 3500K 869 lm - CRIMAX - 4000K	1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K	1984 lm - CRIMAX - 2700K 2111 lm - CRIMAX - 3000K 2160 lm - CRIMAX - 3500K 2225 lm - CRIMAX - 4000K
1125 lm - F90 CRI - 3000K 1165 lm - F90 CRI - 3500K 1185 lm - F90 CRI - 4000K	1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K	2880 lm - F90 CRI - 3000K 2946 lm - F90 CRI - 3500K 3035 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°

For dry location

Model	Adapter	Cri/Color	Beam	Driver/Dimmer	Finish
-----	-	----	-	-	--
AX110 10W 120V AXL10 10W 120V AX111 15W 120V AXL11 15W 120V AX113 22W 120V AXL13 22W 120V AX117 30W 120V AXL17 30W 120V	S STUCCHI ONETRACK(*) compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	A 0 -10V	01 white 02 black 18 grey Other on request

Ordering example : AX111 S 8030 M A 01 For track info see page 282

Accessories

SA101 Directional louvers	SA200 Honeycomb filter	SA300 Fresnel lens	SA400 Snoot





KOR


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global (*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

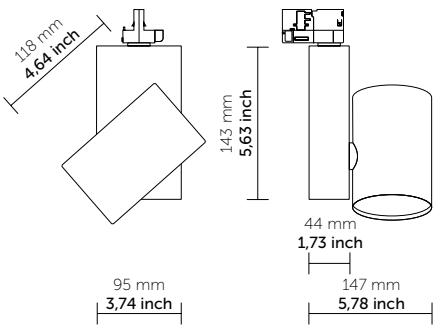

0° - 90° vertical tilting / 355° horizontal rotation

Accessories

SA101
Directional louvers



SA200
Honeycomb filter



SA300
Fresnel lens



SA400
Snoot



SA201 use only with SA101

(*) Global is a registered trade mark of Nordic Aluminium

KR105 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR103 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR107 35W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

For dry location


Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
KR105 15W120V KR103 26W120V KR107 35W120V	G Global(*) GES and GEK compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **KR105 G 8030 M 01** For track info see page 282

GA70

Adapter kit for ceiling installation - white, grey, black



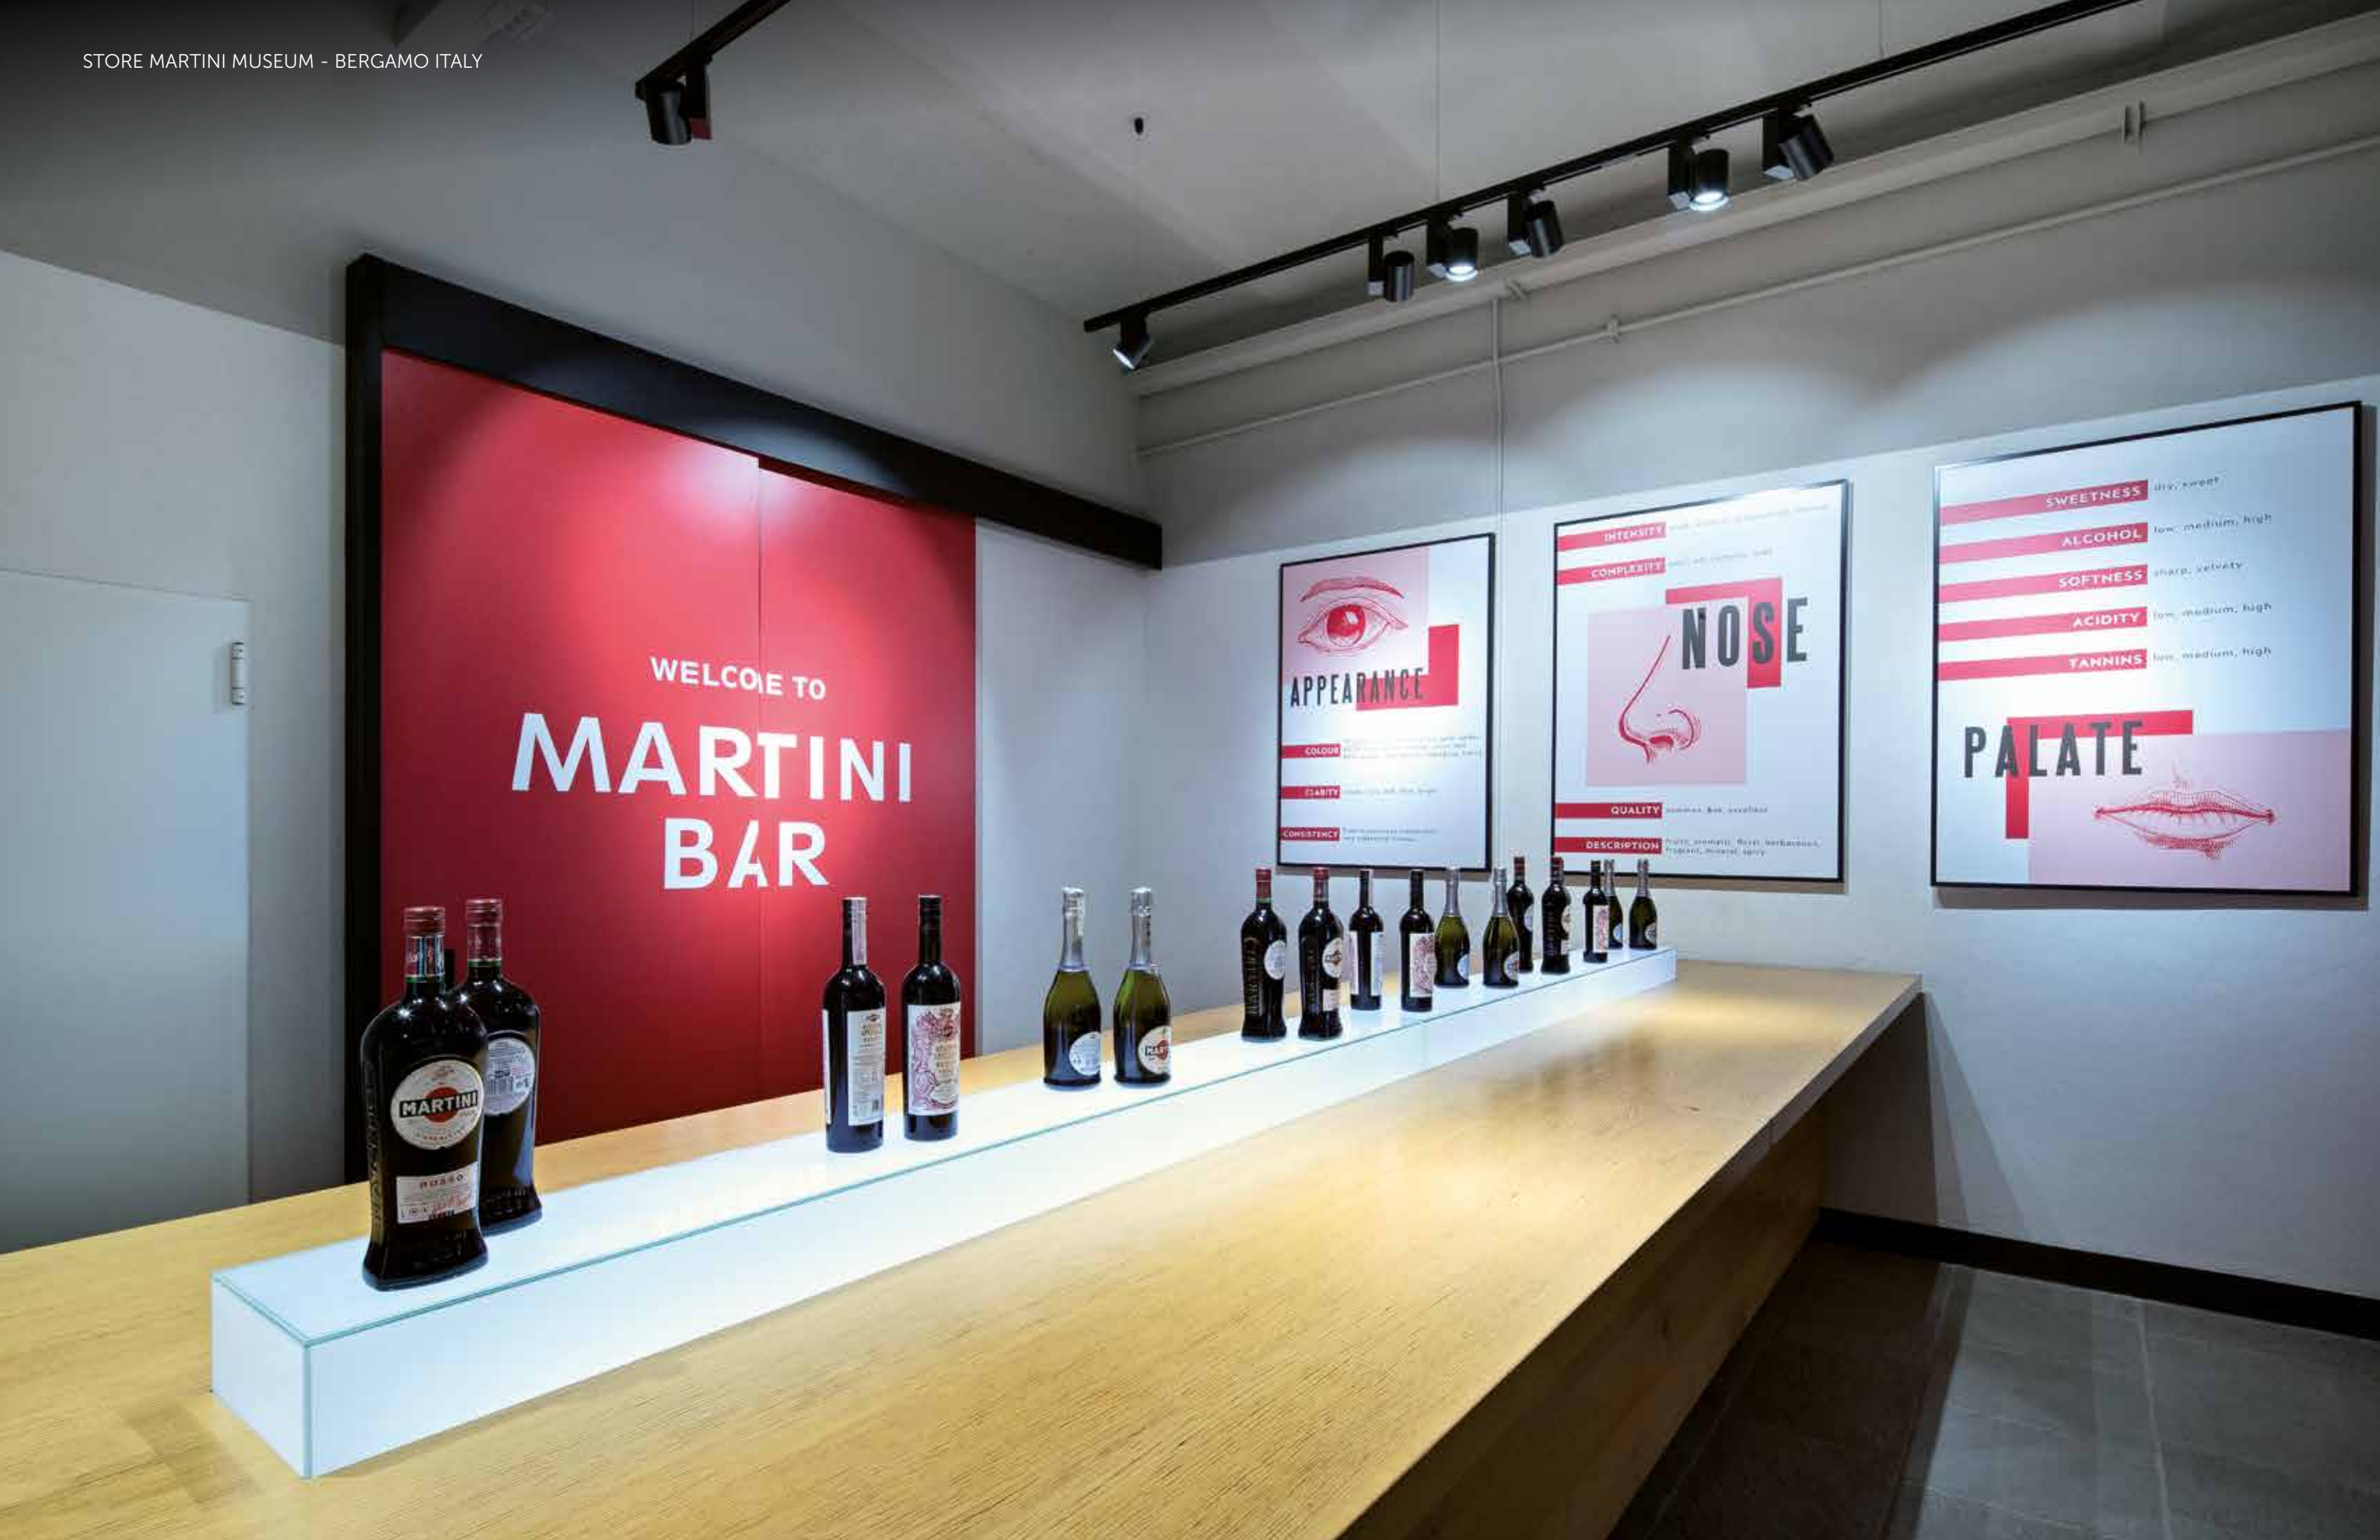

WELCOME TO
MARTINI
BAR

APPEARANCE

COLOUR ...

CLARITY ...

CONSISTENCY ...

NOSE

INTENSITY ...

COMPLEXITY ...

QUALITY ...

DESCRIPTION ...

PALATE

SWEETNESS dry, sweet

ALCOHOL low, medium, high

SOFTNESS sharp, velvety

ACIDITY low, medium, high

TANNINS low, medium, high








KOR RECESSED 02
Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trim adjustable projector with LED lighting system.
Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Complete with housing. IC rated.



FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

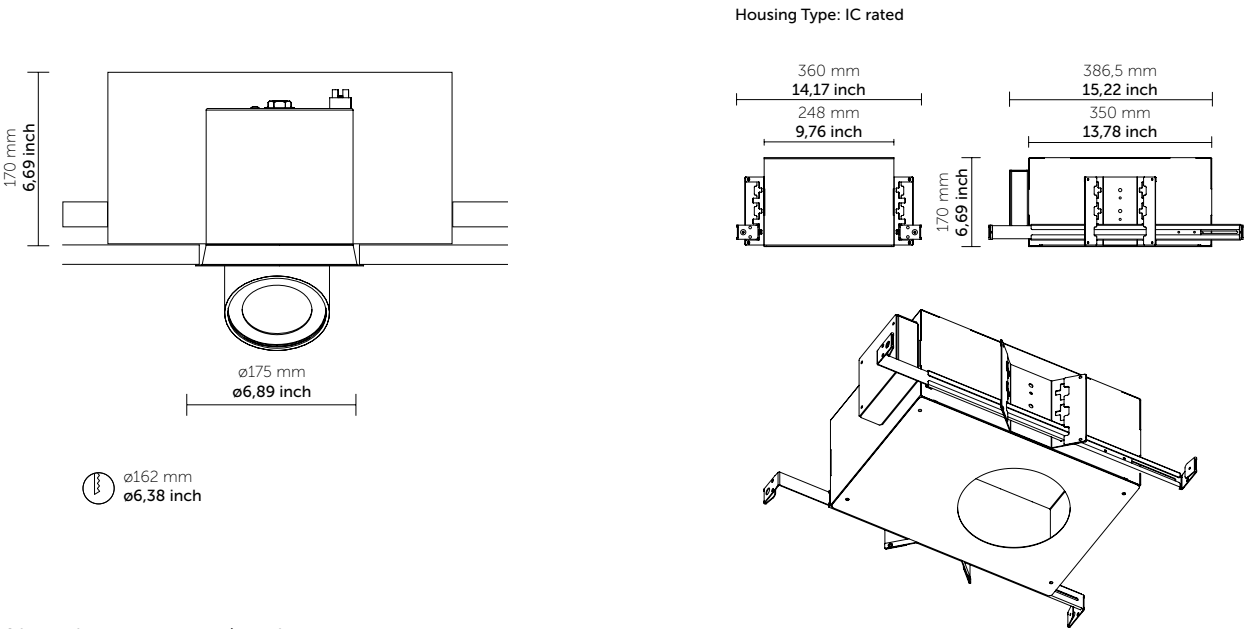

0° - 45° vertical tilting / 355° horizontal rotation

KR109 15W	KR110 26W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°

For dry location 

Ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
KR109 15W120V KR110 26W120V *Housing is included	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**KR109 8030 M 01**



KOR single light

Design: QUATTROBI TECHNICAL DEPARTMENT


Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

Head details dimension:

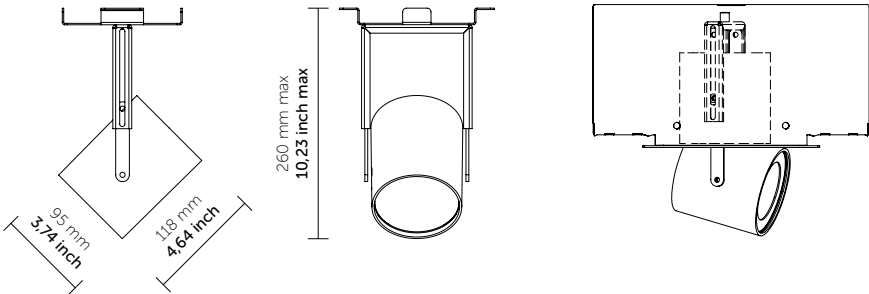

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

KR127 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering head info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**KR125 8030 M 01**

Ordering info housing see page 62



KOR double light

Design: QUATTROBI TECHNICAL DEPARTMENT


Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

Head details dimension:

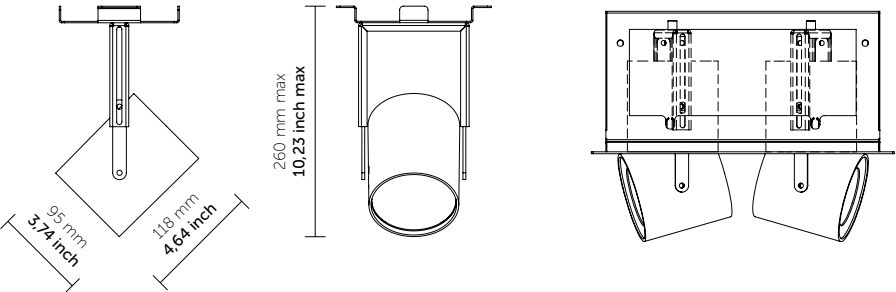

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

KR127 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering head info

Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**KR125 8030 M 01**

Ordering info housing see page 62



KOR triple light

Design: QUATTROBI TECHNICAL DEPARTMENT


Recessed adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Alloys aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

Head details dimension:

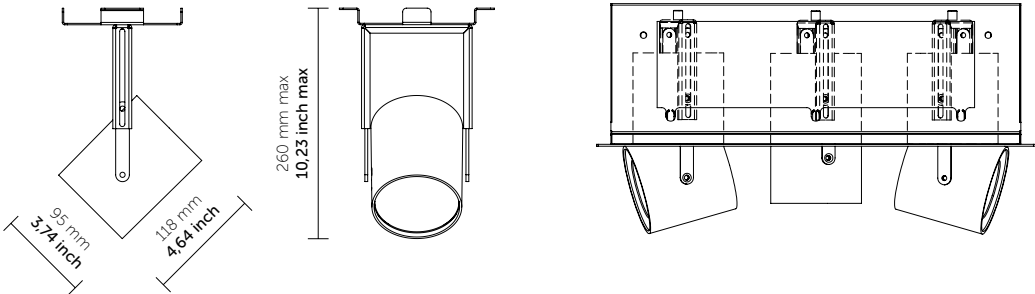

0° - 90° vertical tilting / 355° horizontal rotation

KR125 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

KR127 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

KR129 35W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K


S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering head info


Model	Cri/Color	Beam	Finish
-----	----	-	--
KR125 15W120V KR127 26W120V KR129 35W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**KR125 8030 M 01**

Ordering info housing see page 62

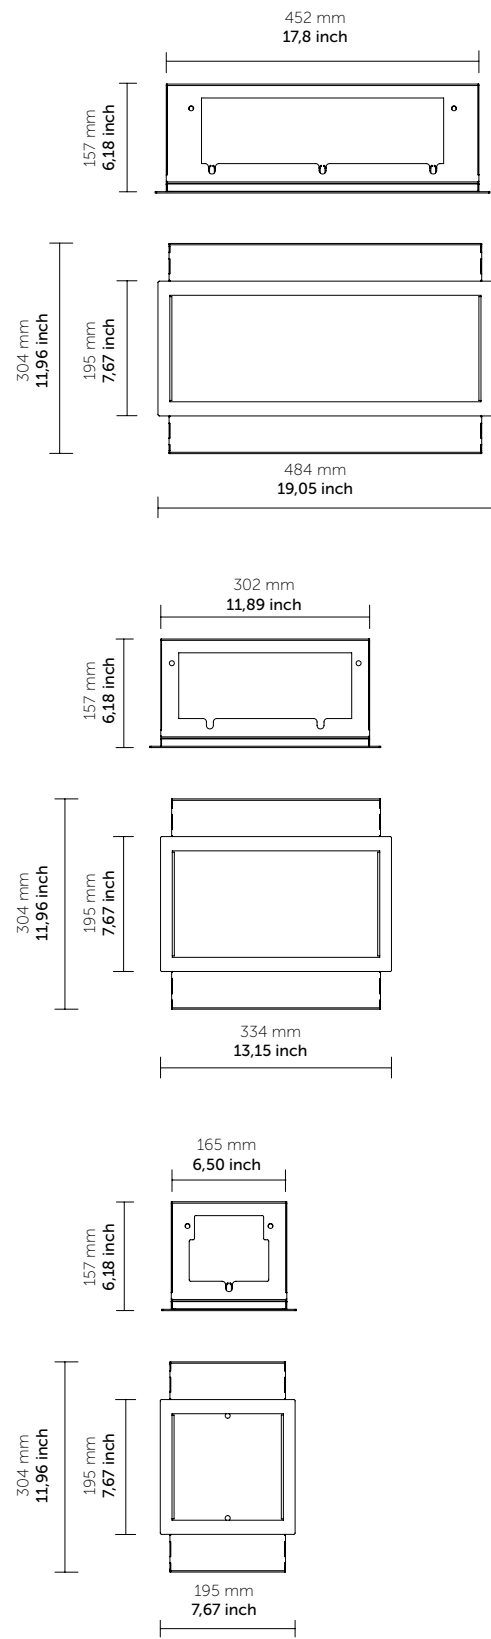

EX. RECESSED BOX + BAR HANGERS




RECESSED BOX

KR000 for triple light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 




465 mm
A= 18,30 inch

KR222 for double light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 




315 mm
A= 12,40 inch







KR111 for single light

TYPE NON IC – INHERENTLY PROTECTED

For dry location 



175 mm
A= 6,88 inch

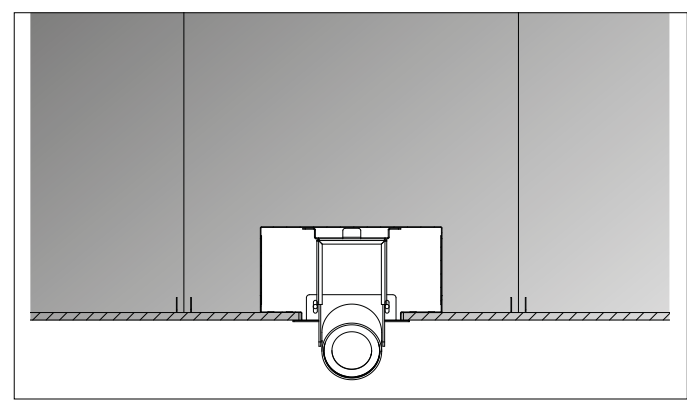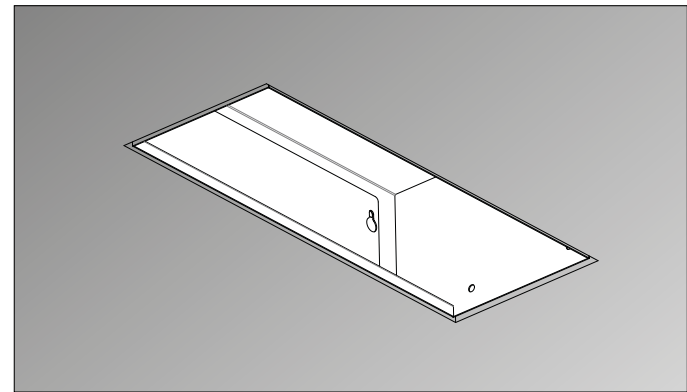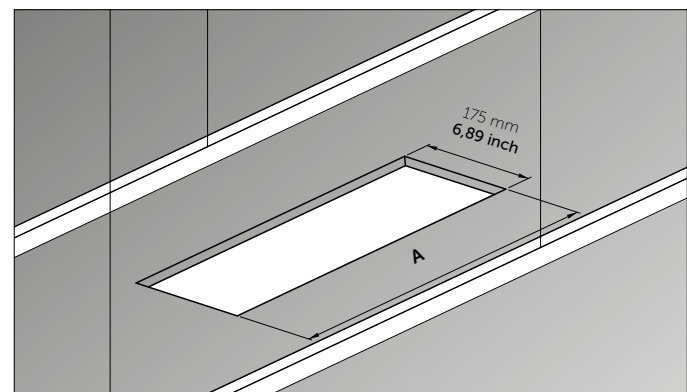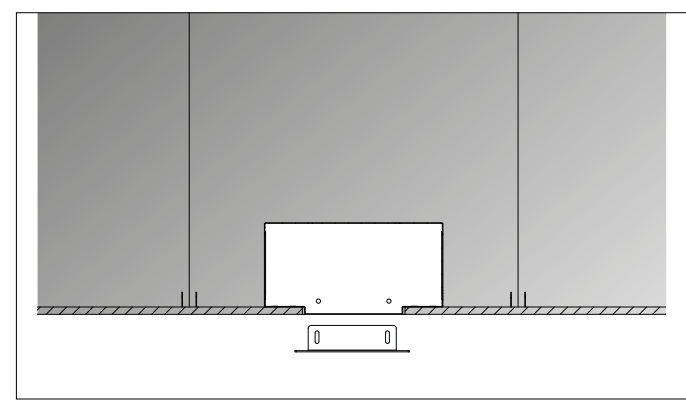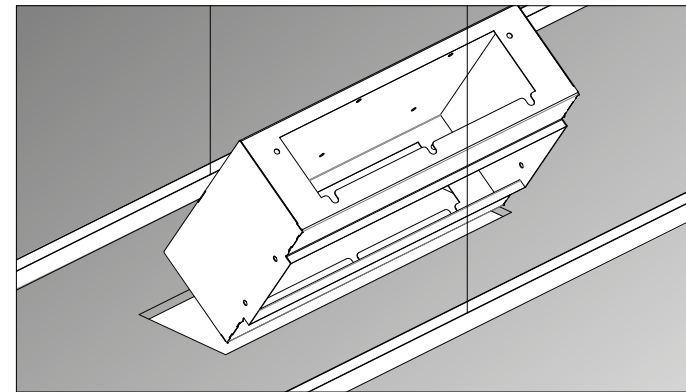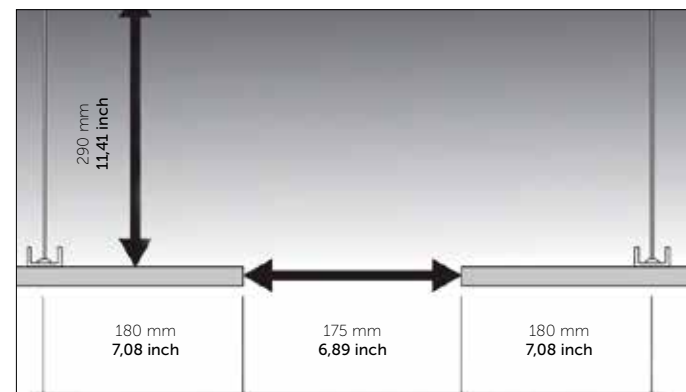


Ordering box info

Model	Finish
----	--
KR000 triple light KR222 double light KR111 single light	01 white 02 black 18 grey Other on request

Ordering recessed box example: **KR000.01**

KRBAR N°2 BAR HANGERS

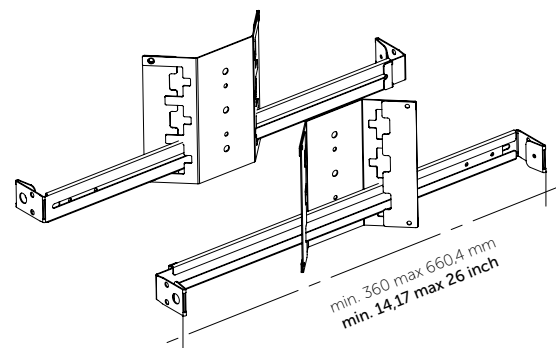





MISSING light

Design: QUATTROBI TECHNICAL DEPARTMENT


Lighting system: Adjustable LED projector with electronic driver, optical unit with front tempered glass protective screen.



FEATURES

Power (W)	15 - 26 - 35
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

Head details dimension:

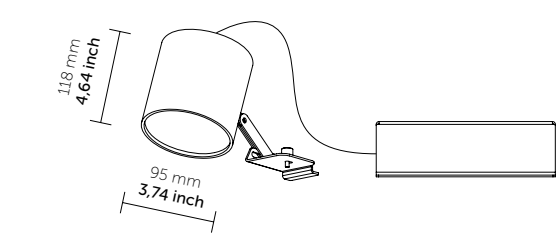

0° - 90° vertical tilting / 355° horizontal rotation

MS3521 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

MS3523 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

MS3525 35W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
MS3521 15W120V MS3523 26W120V MS3525 35W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**MS3521 8030 M 01**

Ordering info recessed box see page 71





MISSING Recessed linear module

Design: QUATTROBI TECHNICAL DEPARTMENT

Linear modular system for LED lighting system. Suitable for indoor applications such as retail stores, museums and art galleries.

FLS



CRI
MAX

F90

FEATURES

Ceiling Cut-out

220 mm
8,66 inch
4,5 mm
A+ 0,18 inch





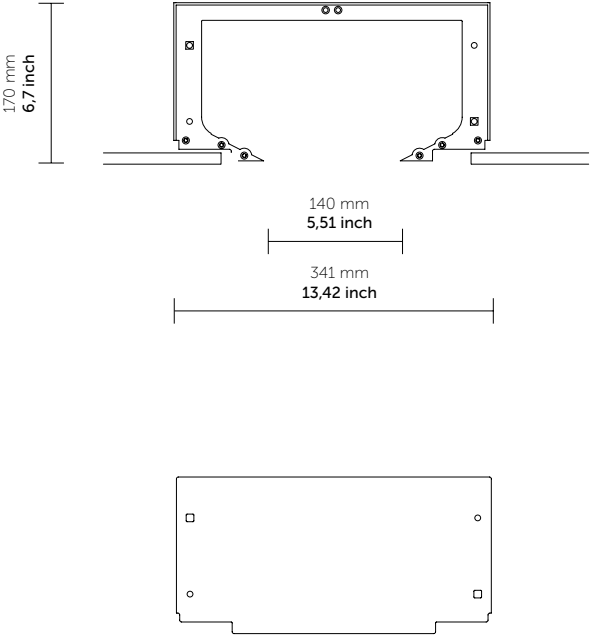
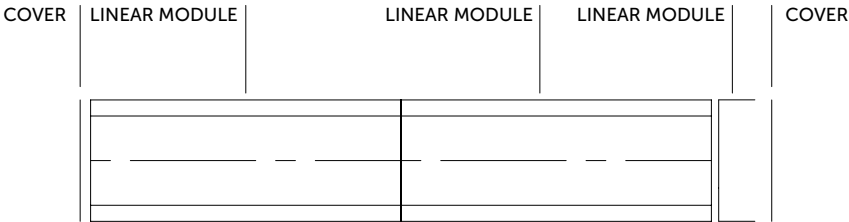


LINEAR MODULE

Model	A
MS3511 MS3512 MS3518	5,90"/150mm - 1 light max 11,81"/300mm - 2 light max 47,24"/1200mm - 8 light max

TYPE NON IC
For dry location

MS3500 - 2 covers for Missing module
For dry location

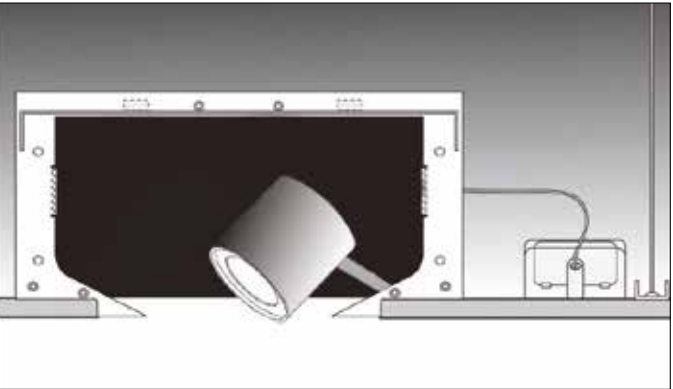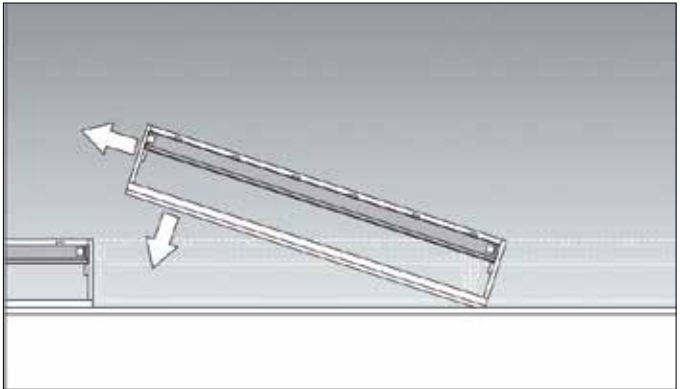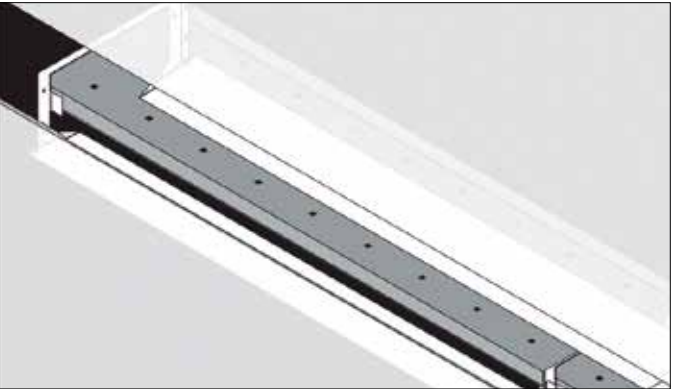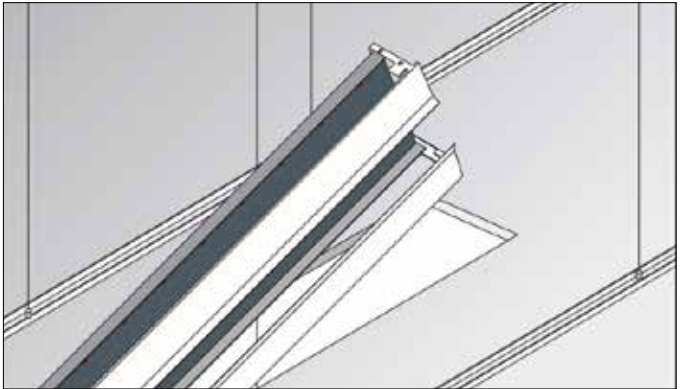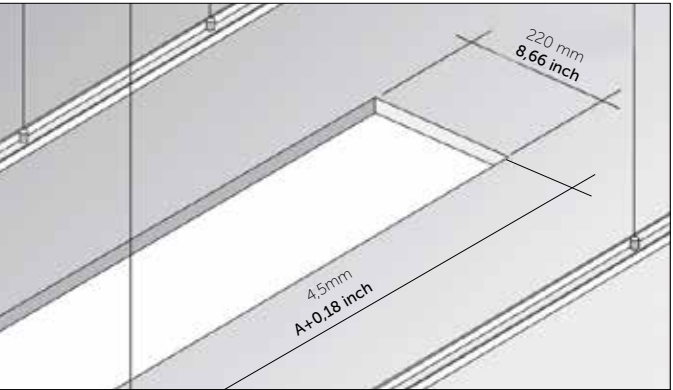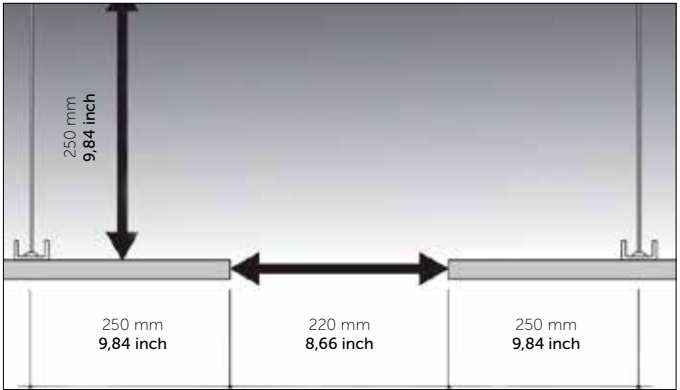

MISSING



INNER


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Track X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

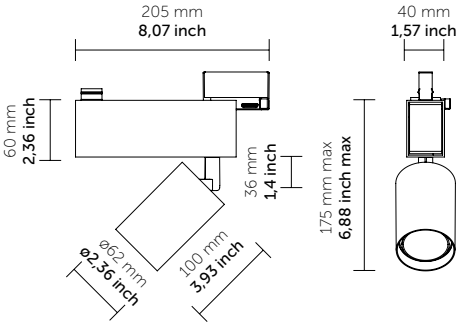

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

IN005 15W

1575 lm - 80 CRI - 3000K
1630 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1630 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

For dry location

IN007 22W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
----	-	----	-	--
IN005 15W120V IN007 22W120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IN005 G 8030 M 01** For track info see page 282





INNER


Design: QUATTROBI TECHNICAL DEPARTMENT

Semi-recessed trim adjustable projector with LED lighting system.
Optical unit. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Complete with housing. IC rated.




FEATURES

Power (W)	15 - 22
Light beam (°)	Spot - Medium - Wide
Installation	Semi-recessed
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

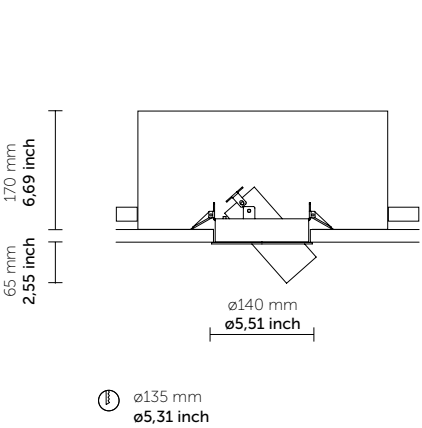

0° - 40° vertical tilting / 355° horizontal rotation

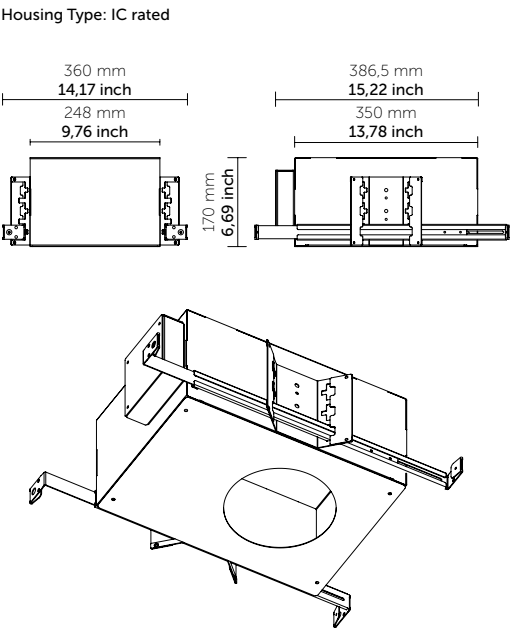

IN001 15W

1575 lm - 80 CRI - 3000K
1630 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1630 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

TYPE IC

For dry location

IN003 22W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 24°
M - Medium - 32°
W - Wide - 50°

Ordering info

Model	Cri/Color	Beam	Finish	
----	----	-	--	
IN001 15W120V IN003 22W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	

Ordering example :**IN001 8030 M 01**



MAX


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	26 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

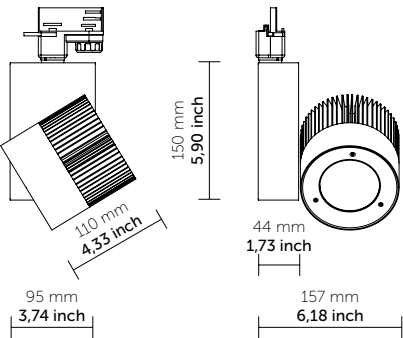

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

MX121 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

MX101 40W

4550 lm - 80 CRI - 3000K
5186 lm - 80 CRI - 3500K
5343 lm - 80 CRI - 4000K
4055 lm - 90 CRI - 2700K
4207 lm - 90 CRI - 3000K
4258 lm - 90 CRI - 3500K
3726 lm - 97 CRI - 3000K

3493 lm - CRIMAX - 2700K
3716 lm - CRIMAX - 3000K
3801 lm - CRIMAX - 3500K
3916 lm - CRIMAX - 4000K

4550 lm - F90 CRI - 3000K
5186 lm - F90 CRI - 3500K
5343 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 43°
W - Wide - 51°

Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
MX121 26W120V MX101 40W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **MX121 S 8030 M 01** For track info see page 282

Accessories

GA70

Adapter kit for ceiling installation - white, grey, black





MINI MAX


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Track ; G version Global(*) GES compatible ; X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming



0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

MM101 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location 

MM103 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info


Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
MM101 15W120V MM103 26W120V	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **MM101 S 8030 M 01** For track info see page 282

Accessories

GA70

Adapter kit for ceiling installation - white, grey, black







PHOTO


Design: LUCA RACIOPPO ARCHITECT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	26 - 40
Light beam (°)	Spot - Medium - Wide
Installation	Track X version - Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

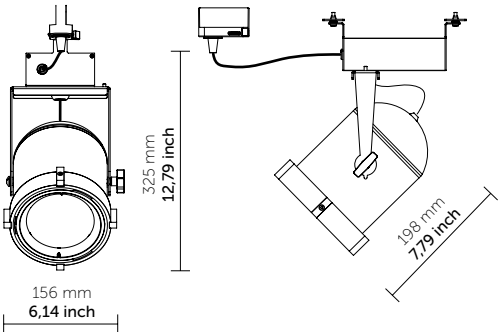

0° - 90° vertical tilting / 355° horizontal rotation

CV002 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 30°
W - Wide - 40°

For dry location 

CV001 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 30°
W - Wide - 40°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
CV001 26W 120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **CV001 S 8030 M 01** For track info see page 282

(*) Global is a registered trade mark of Nordic Aluminium





PHOTO RECESSED


Design: LUCA RACIOPPO ARCHITECT

Recessed trim adjustable projector with LED lighting system.
Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Complete with housing. IC rated.



FEATURES

Power (W)	15 - 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

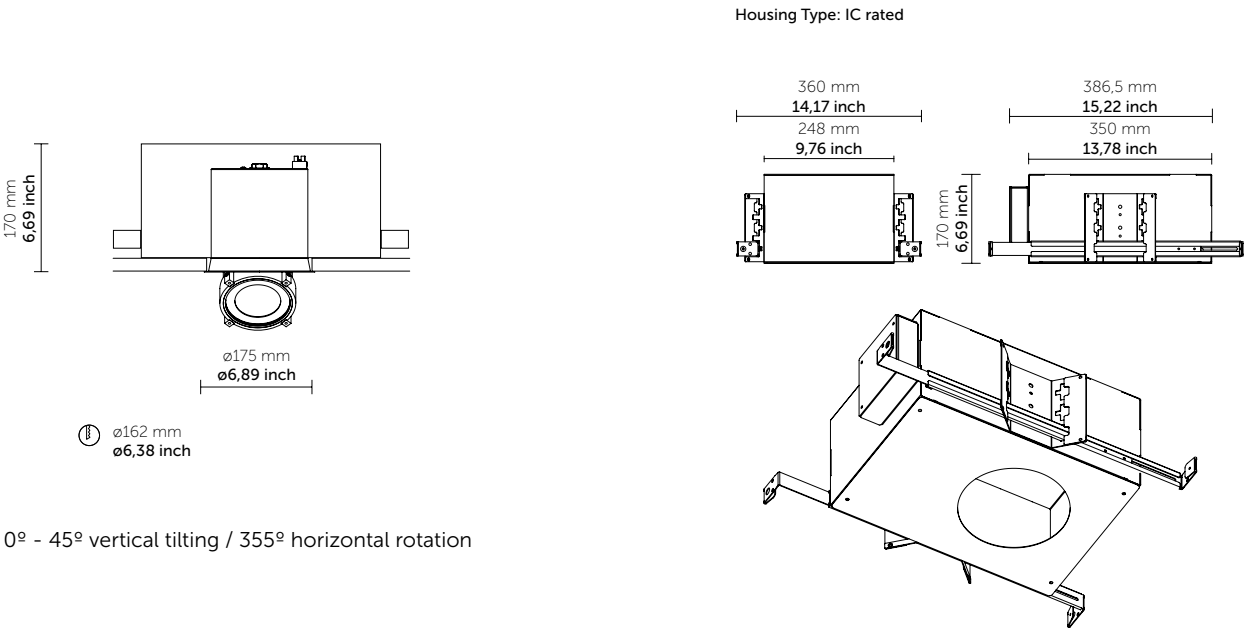

0° - 45° vertical tilting / 355° horizontal rotation

CV005 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

For dry location

CV007 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
CV005 15W120V CV007 26W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **CV005 8030 M 01**



SAM95


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 20 - 26 - 35 - 45
Light beam (°)	Spot - Medium - Wide
Installation	Track ; X version-Global(*) XTS compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

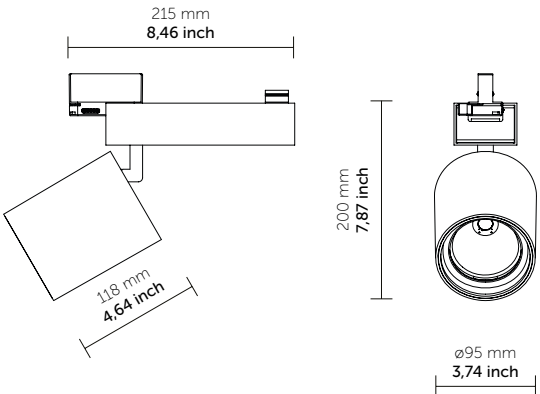

0° - 90° vertical tilting / 355° horizontal rotation

(*) Global is a registered trade mark of Nordic Aluminium

SA111 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1000 lm - 90 CRI - 2400K (FLS)
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SA114 35W

4084 lm -80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K
4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

For dry location

SA112 20W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1300 lm - 90 CRI - 2400K (FLS)
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K
2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

SA115 45W

5022 lm - 80 CRI - 3000K
5138 lm - 80 CRI - 3500K
5293 lm - 80 CRI - 4000K
3400 lm - 90 CRI - 2400K (FLS)
4018 lm - 90 CRI - 2700K
4168 lm - 90 CRI - 3000K
4218 lm - 90 CRI - 3500K
3691 lm - 97 CRI - 3000K

3460 lm - CRIMAX - 2700K
3681 lm - CRIMAX - 3000K
3766 lm - CRIMAX - 3500K
3880 lm - CRIMAX - 4000K
5022 lm - F90 CRI - 3000K
5138 lm - F90 CRI - 3500K
5293 lm - F90 CRI - 4000K

S - Spot - 21°
M - Medium - 34°
W - Wide - 51°

SA113 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K
2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 34°
W - Wide - 51°

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SA111 15W120V SA112 20W120V SA113 26W120V SA114 35W120V SA115 45W120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : SA111 X 8030 M 01 For track info see page 282





SPINNER



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 - 26 - 35 - 45
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

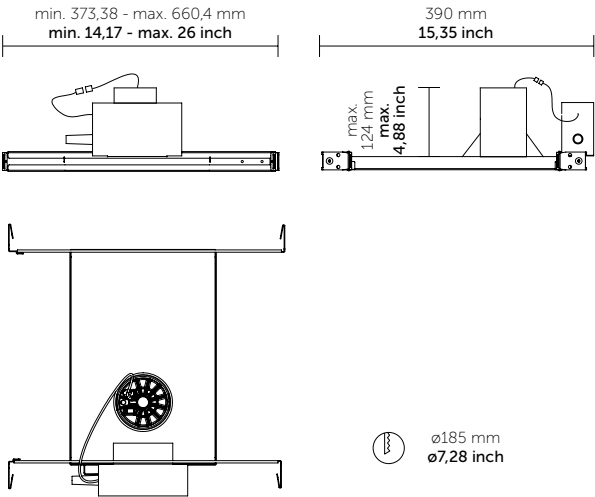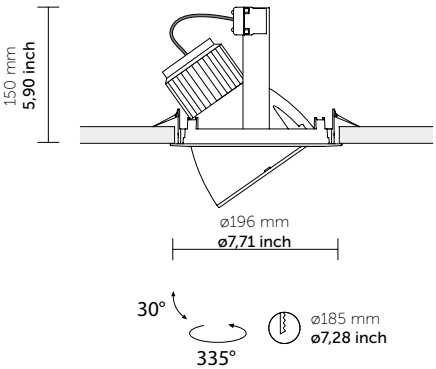

SPARTR1 17W	SPARTR1 26W	SPARTR2 35W	SPARTR2 45W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 12° M - Medium - 24° W - Wide - 55°	S - Spot - 12° M - Medium - 24° W - Wide - 55°	S - Spot - 16° M - Medium - 32° W - Wide - 56°	S - Spot - 16° M - Medium - 32° W - Wide - 56°

TYPE NON IC

For dry location 

Projector ordering info				Housing ordering info new construction		
Model	Cri/Color	Beam	Finish	Model	Power	Voltage
----	----	-	--	-----	----	-
SPARTR1 SPARTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SPH2ARNCTR	17 17W 26 26W 35 35W 45 45W	120

Projector ordering example: **SPARTR1 8030 M 01**
Housing ordering example: **SPH2ARNCTR 26 120**



SPINNER



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.



FEATURES

Total fixture Watts	17 - 26 - 35 - 45
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

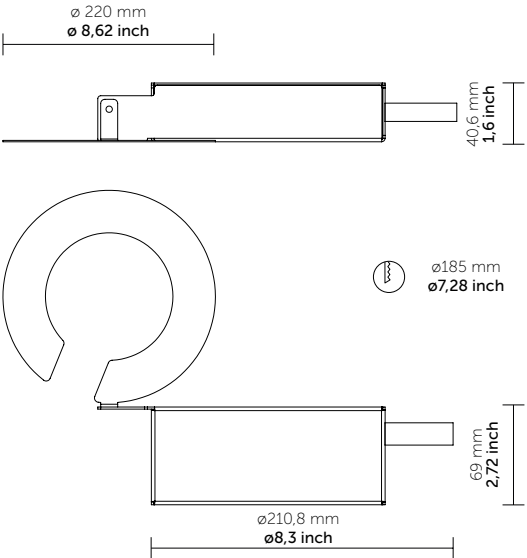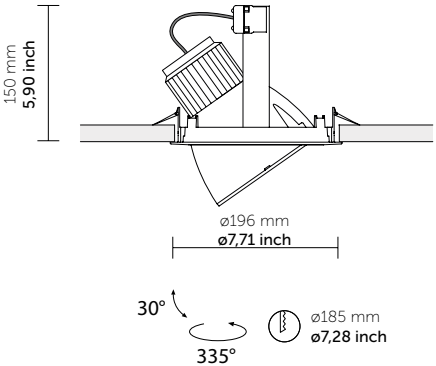

SPARTR1 17W	SPARTR1 26W	SPARTR2 35W	SPARTR2 45W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 12° M - Medium - 24° W - Wide - 55°	S - Spot - 12° M - Medium - 24° W - Wide - 55°	S - Spot - 16° M - Medium - 32° W - Wide - 56°	S - Spot - 16° M - Medium - 32° W - Wide - 56°

TYPE NON IC
For dry location



Projector ordering info				Housing ordering info Remodeler version		
Model	Cri/Color	Beam	Finish	Model	Power	Voltage
----	----	-	--	-----	----	-
SPARTR1 SPARTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	SLR1ARNCTR	17 17W 26 26W 35 35W 45 45W	120

Projector ordering example: **SPARTR1 8030 M 01**
Housing ordering example: **SLR1ARNCTR 26 120**



SUNLIGHT 01



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless round luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

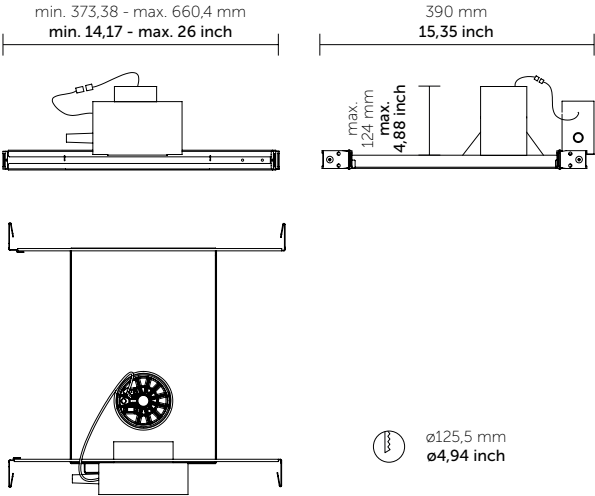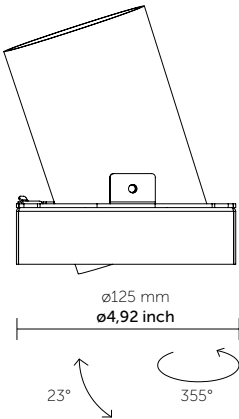

SLARTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLARTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLARTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request
	Other on request		

Ordering example :**SLARTL 8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2ARNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :**SLH2ARNCTL 17 12 0**





SUNLIGHT 01
Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless round luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

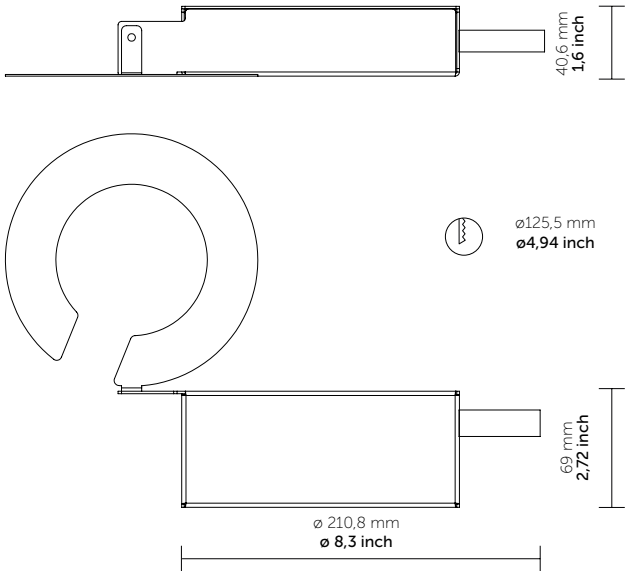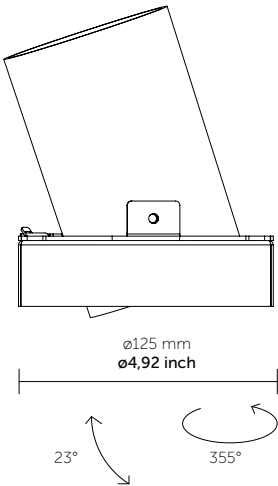

SLARTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC
For dry location 

SLARTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLARTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K	S Spot M Medium W Wide	01 white 02 black 18 grey
	CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K	Other on request	Other on request
	F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K		
	Other on request		

Ordering example :**SLARTL 8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1ARNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :**SLR1ARNCTL 17 12 0**



SUNLIGHT 02



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

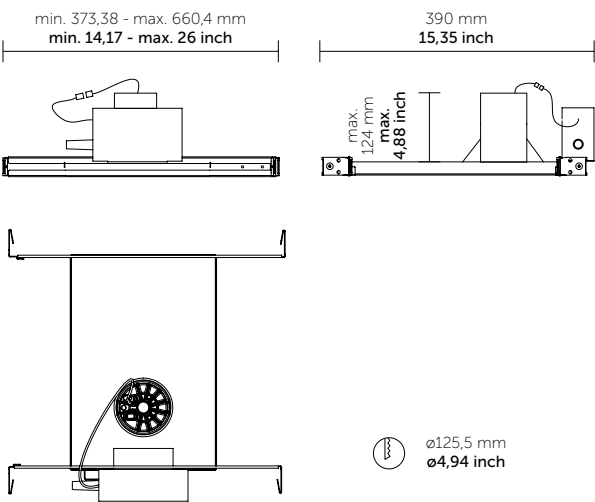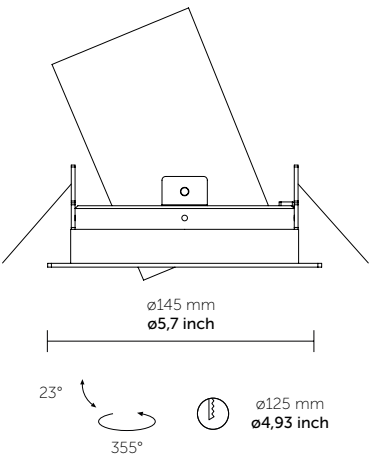

SLARTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location

SLARTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLARTR **8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2ARNCTR **17 12 0**



SUNLIGHT 02



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hzz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

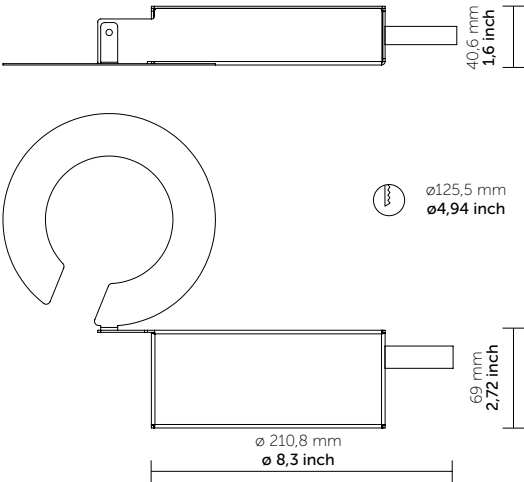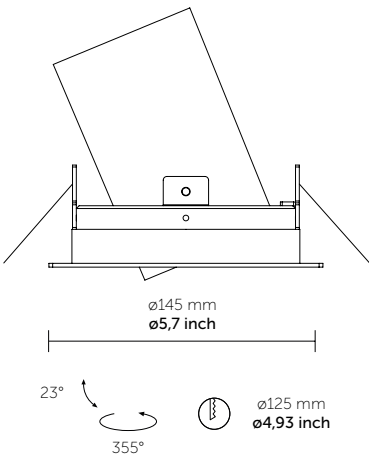

SLARTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location

SLARTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLARTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLARTR **8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1ARNCTR **17 12 0**



SUNLIGHT 02



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Adjustable optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.



FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

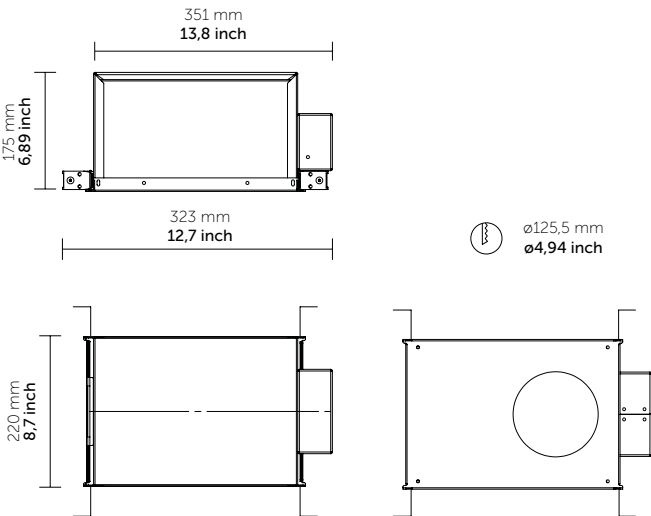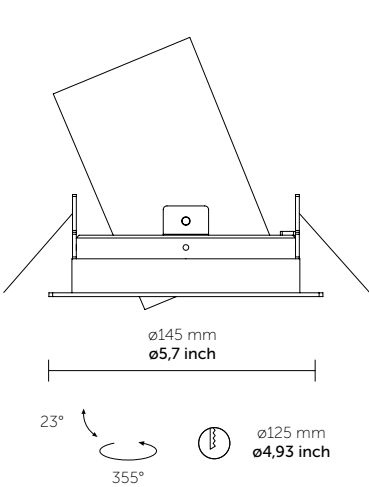

SLARTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location

Projector ordering info			
Model	Cri/Color	Beam	Finish
----	----	-	--
SLARTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLARTR **8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
----	----	-	--
SLH3ARCPTTR (CCEA) SLH3ARICTR (IC)	17 17W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example: **SLH3ARCPTTR 17 12 0**





SUNLIGHT 03



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

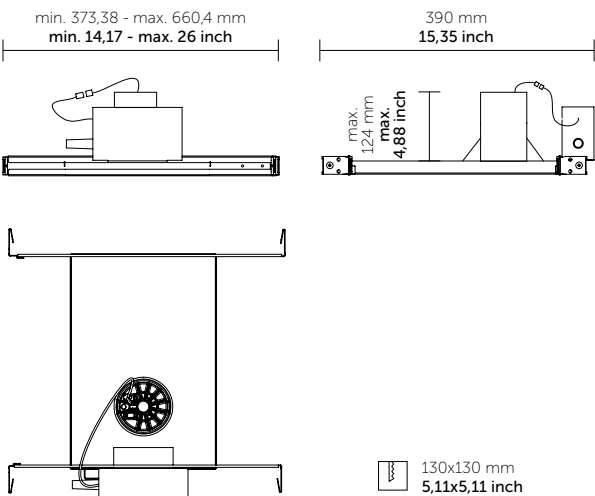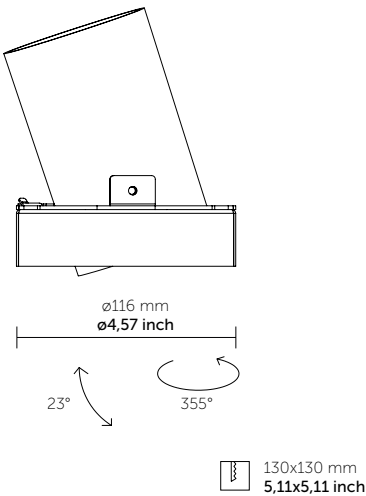

SLASTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLASTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLASTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTL **8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2ASNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2ASNCTL **17 12 0**



SUNLIGHT 03



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trimless square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

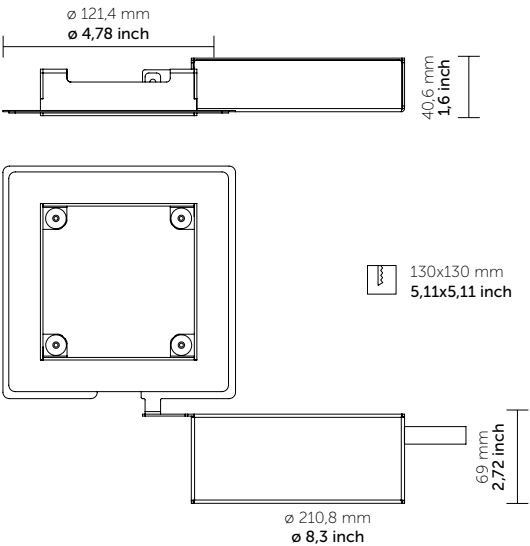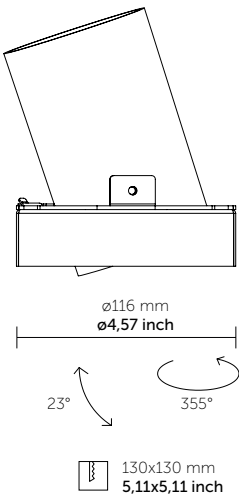

SLASTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLASTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLASTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTL **8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1ASNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1ASNCTL **17 12 0**



SUNLIGHT 04



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

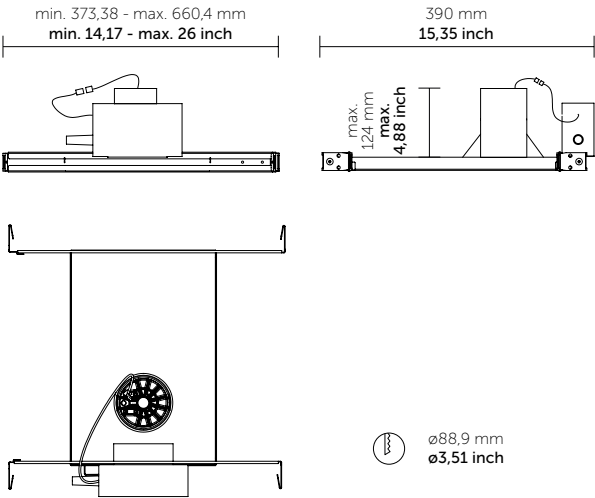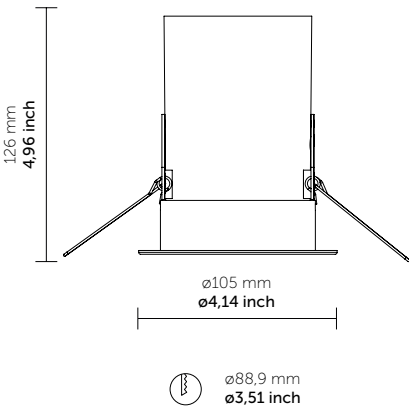

SLDSTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLDSTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDSTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDSTR 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2DRNCTR 17 12 0



SUNLIGHT 04



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

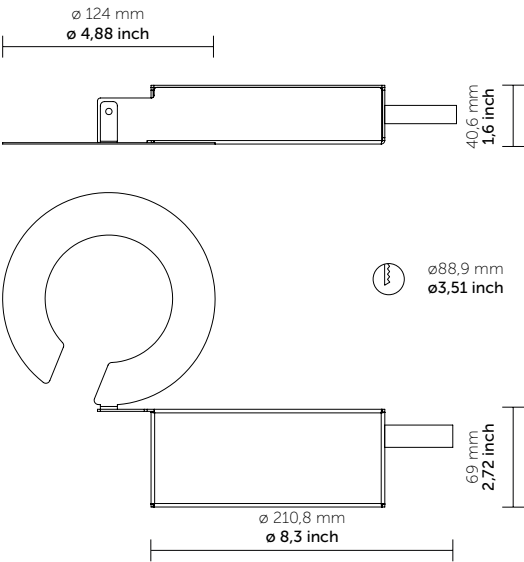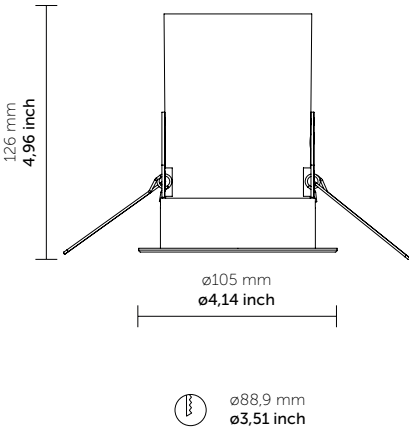

SLDSTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLDSTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDSTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDSTR 8030 M 01

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1DRNCTR 17 12 0



SUNLIGHT 04





Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

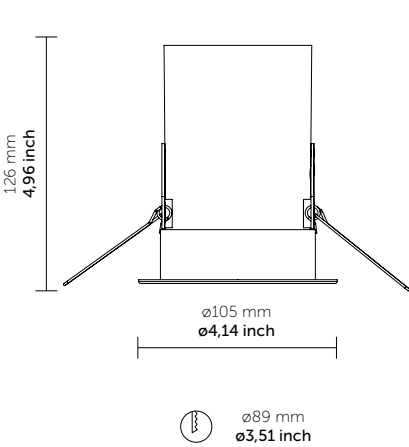

SLDSTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDSTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDSTR 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH3DRCPTR (CCEA) SLH3DRICTR (IC)	17 17W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH3DRNCTR 17 12 0





SUNLIGHT 05



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

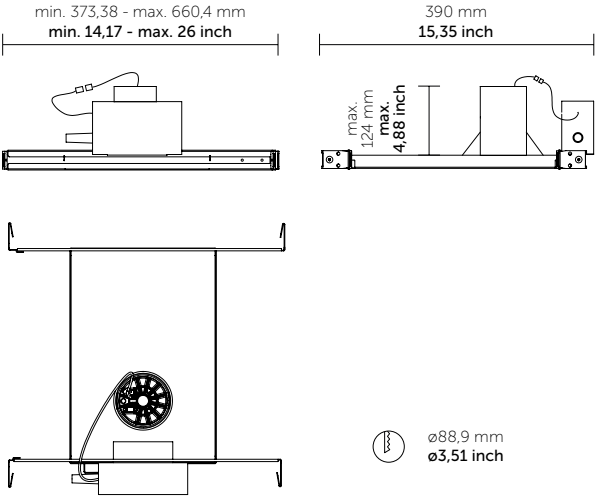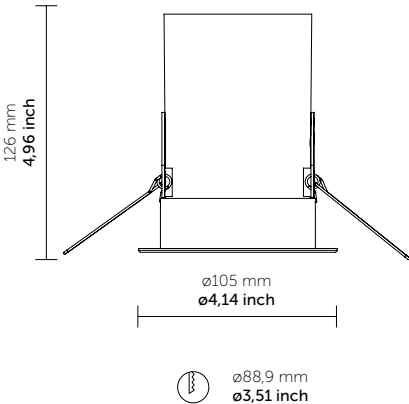

SLDRTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location

SLDRTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTR 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2DRNCTR 17 12 0



SUNLIGHT 05



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

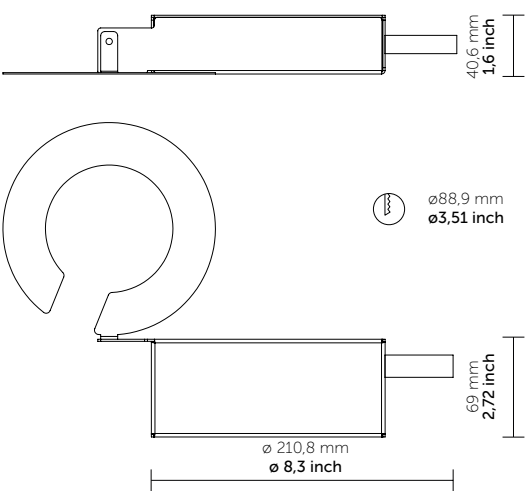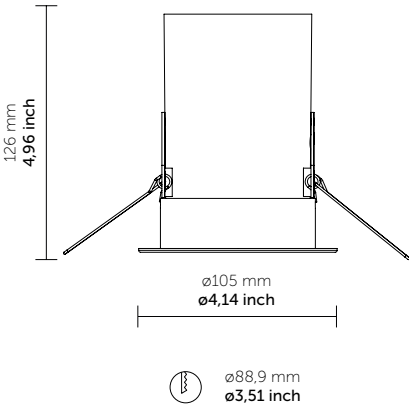

SLDRTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLDRTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTR **8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1DRNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1DRNCTR **17 12 0**



SUNLIGHT 05


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

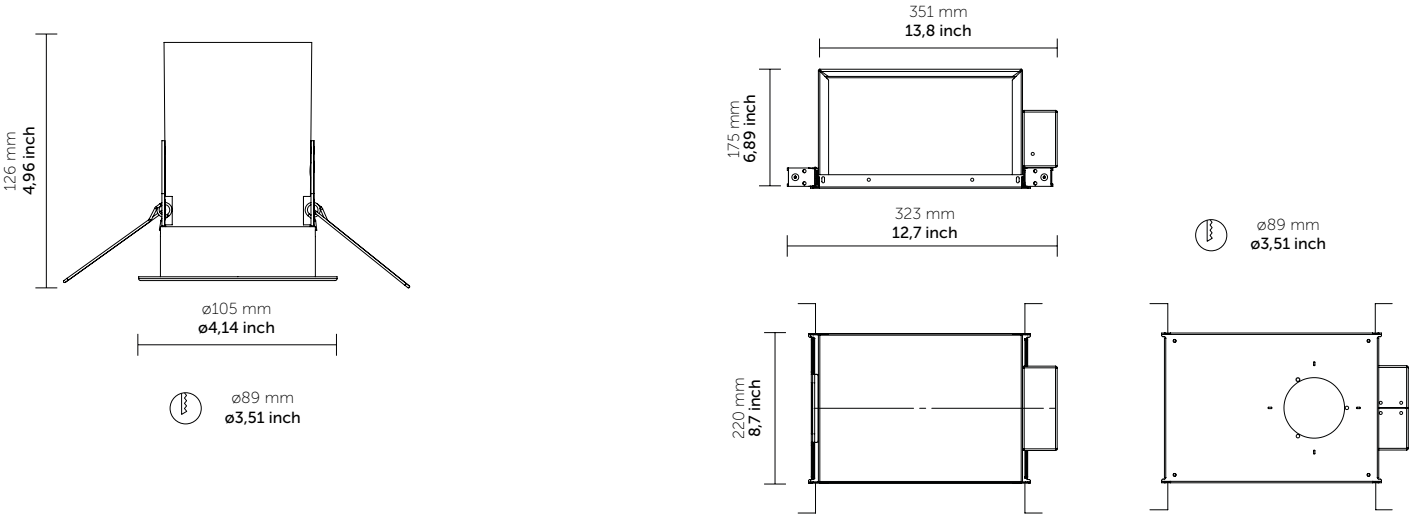

SLDRTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTR 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH3DRCPTR (CCEA) SLH3DRICTR (IC)	17 17W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example: **SLH3DRNCTR 17 12 0**



SUNLIGHT95



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 - 22 - 26 - 35 - 50
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

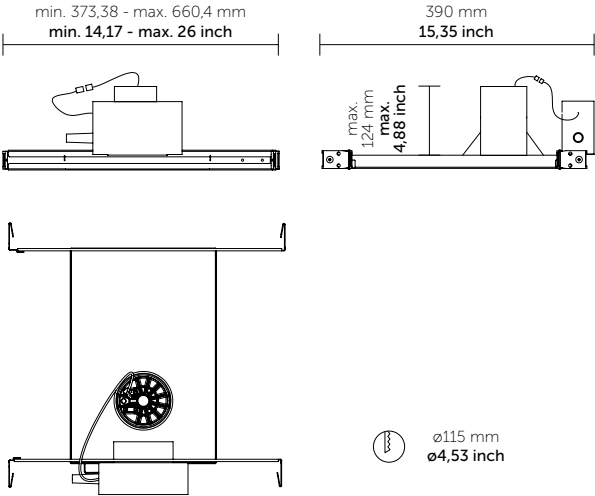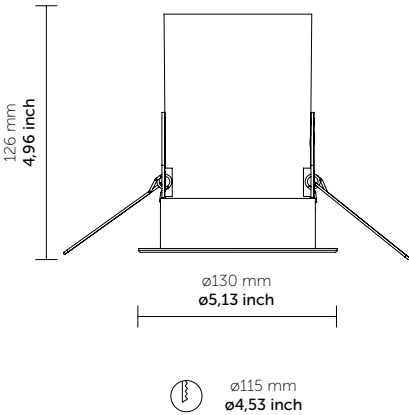

SLBTR1 17W	SLBTR1 22W	SLBTR1 26W	SLBTR2 35W	SLBTR2 50W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1429 lm - 90 CRI - 2400K (FLS) 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 21° M - Medium - 34° W - Wide - 51°	S - Spot - 21° M - Medium - 34° W - Wide - 51°

TYPE NON IC
For dry location



Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLBTR1 SLBTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTR1 8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2DRNCTR	17 17W 22 22W 26 26W 35 35W 50 50W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :**SLH2DRNCTR 17 12 0**



SUNLIGHT95



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.



FEATURES

Total fixture Watts	17 - 22 - 26 - 35 - 50
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

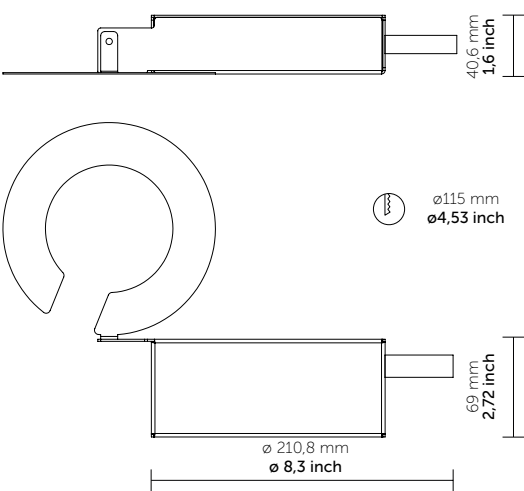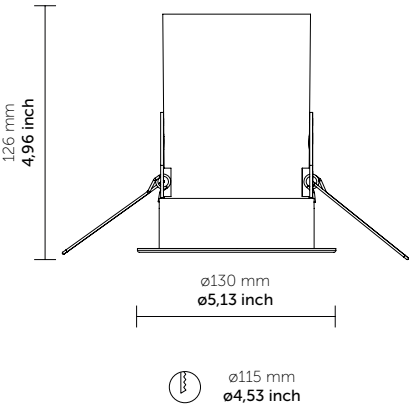

SLBRTR1 17W	SLBRTR1 22W	SLBRTR1 26W	SLBRTR2 35W	SLBRTR2 50W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1429 lm - 90 CRI - 2400K (FLS) 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 21° M - Medium - 34° W - Wide - 51°	S - Spot - 21° M - Medium - 34° W - Wide - 51°

TYPE NON IC
For dry location



Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLBRTR1 SLBRTR2	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :**SLDRTR1 8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR4DRNCTR	17 17W 22 22W 26 26W 35 35W 50 50W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :**SLR4DRNCTR 17 12 0**



SUNLIGHT 06



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

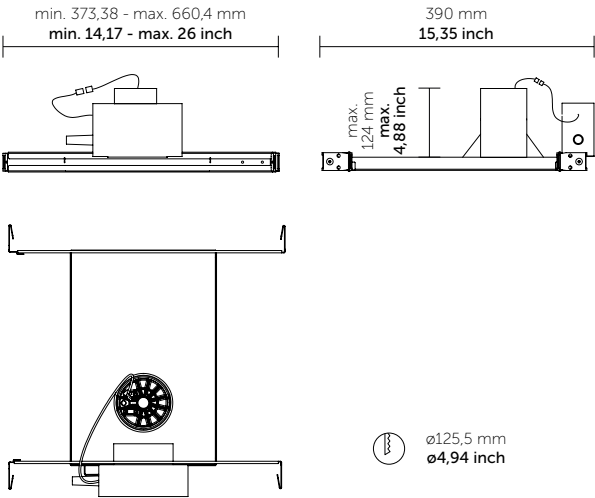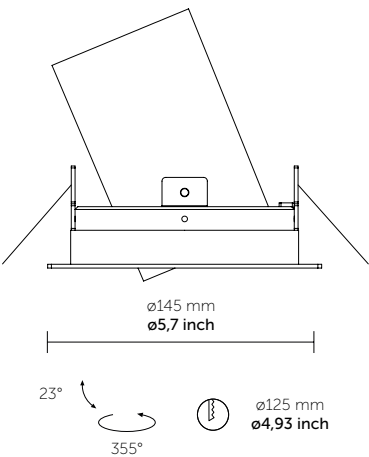

SLASTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location

SLASTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTR 8030 M 01

Housing ordering info

Model	Power	Voltage	Dimming
----	----	-	--
SLH2ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2ARNCTR 17 12 0

Housing new construction.



SUNLIGHT 06



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

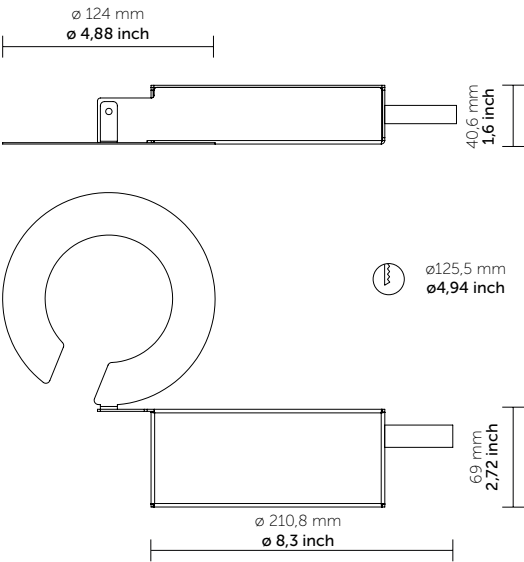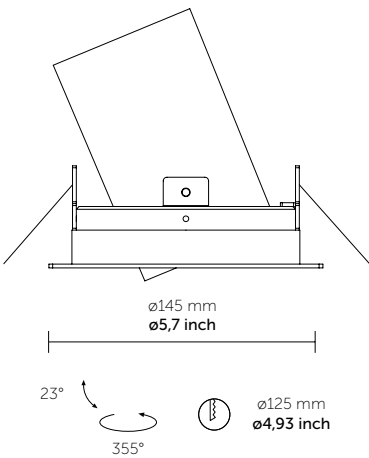

SLASTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLASTR 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLASTR 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTR **8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1ARNCTR	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1ARNCTR **17 12 0**



SUNLIGHT 06



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed Trim square luminaire with LED lighting system.
Adjustable optical unit with front tempered glass protective screen.
Complete with electronic driver. Suitable for indoor applications
such as retail stores, museums and art galleries.
Housing new construction.



FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

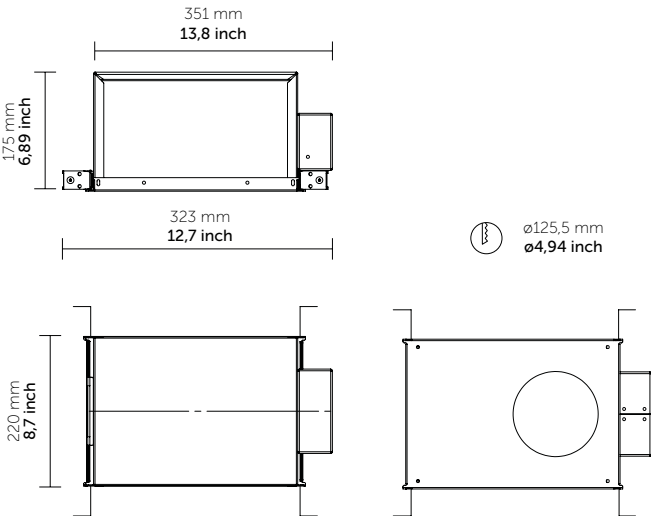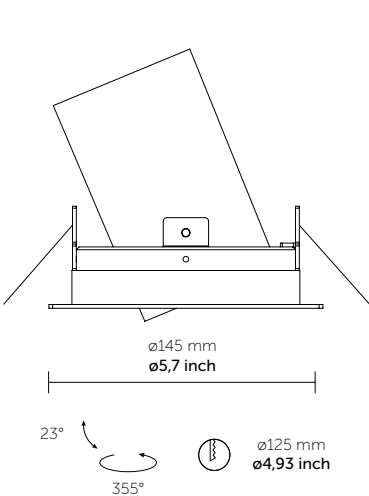

SLASTR 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLASTR	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLASTR 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR3ARCPTTR (CCEA) SLR3ARICTR (IC)	17 17W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example: SLR3ARCPTTR 17 12 0



SUNLIGHT 07



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

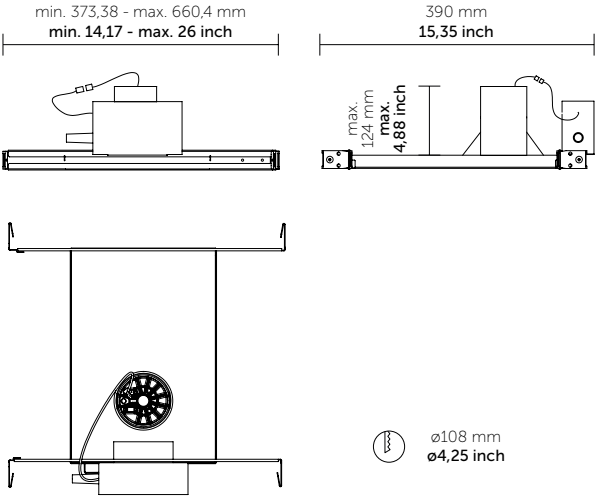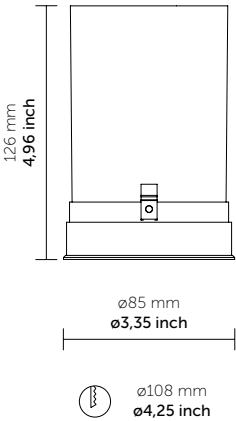

SLDRTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC
For dry location

SLDRTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTL **8030 M 01**

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH2DRNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLH2DRNCTL **17 12 0**



SUNLIGHT 07



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Remodeler version.



FEATURES

Total fixture Watts	17 -21- 26
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

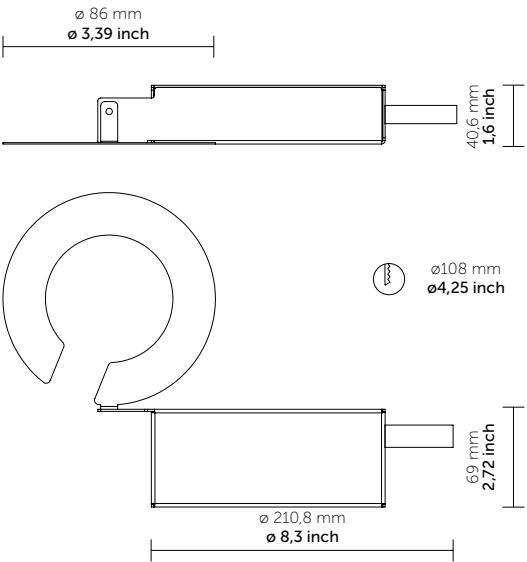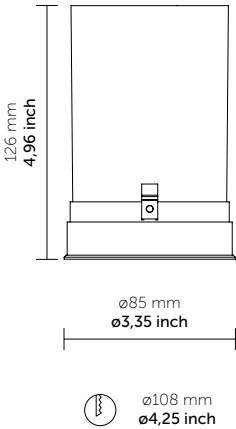

SLDRTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE NON IC

For dry location



SLDRTL 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

SLDRTL 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTL **8030 M 01**

Housing ordering info Remodeler version			
Model	Power	Voltage	Dimming
-----	----	-	--
SLR1DRNCTL	17 17W 21 21W 26 26W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example :SLR1DRNCTL **17 12 0**



SUNLIGHT 07


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed trimless round luminaire with LED lighting system. Fixed optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries. Housing new construction.



FEATURES

Total fixture Watts	17
Light beam (°)	Spot - Medium - Wide
Installation	Recessed
Luminaire housing	Die-cast aluminium
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming (TRIAC/ELV) 120V only

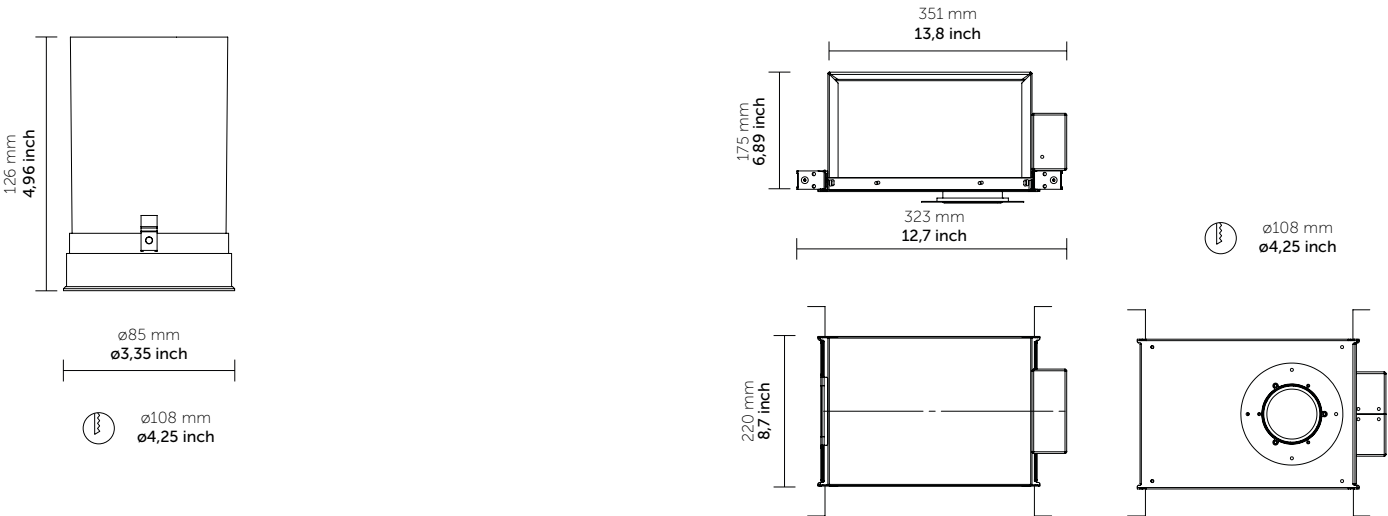

SLDRTL 17W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 34°
W - Wide - 51°

TYPE IC

For dry location

Projector ordering info			
Model	Cri/Color	Beam	Finish
-----	----	-	--
SLDRTL	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example :SLDRTL 8030 M 01

Housing ordering info new construction			
Model	Power	Voltage	Dimming
-----	----	-	--
SLH3DRCPTL (CCEA) SLH3DRICTL (IC))	17 17W	12 120 Volt UN 277 Volt	LC TRIAC/ELV 0 NO DIM

Ordering example: SLH3DRCPTL 17 12 0





ENRI 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed luminaire with LED lighting system.
Adjustable optical assembly is equipped with a front protection louver in tempered glass. With electronic ballast remote.



FEATURES

- Power (W)

Light beam

Color temperature

CRI

Luminaire body

Light sources

Finishing

Power supply

Dimming
- 11 - 10 - 7

Spot - Medium - Wide

2700K, 3000K, 3500K, 4000K

80, 90, 97, CRIMAX



Steel sheet

LED

White, Grey, Custom powder coat


Electronic constant current LED driver, 120V/277V 60Hz

Phase cut dimming

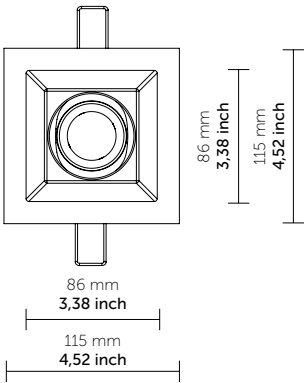

105x105 mm
4,13x4,13 inch

Housing Type: IC rated

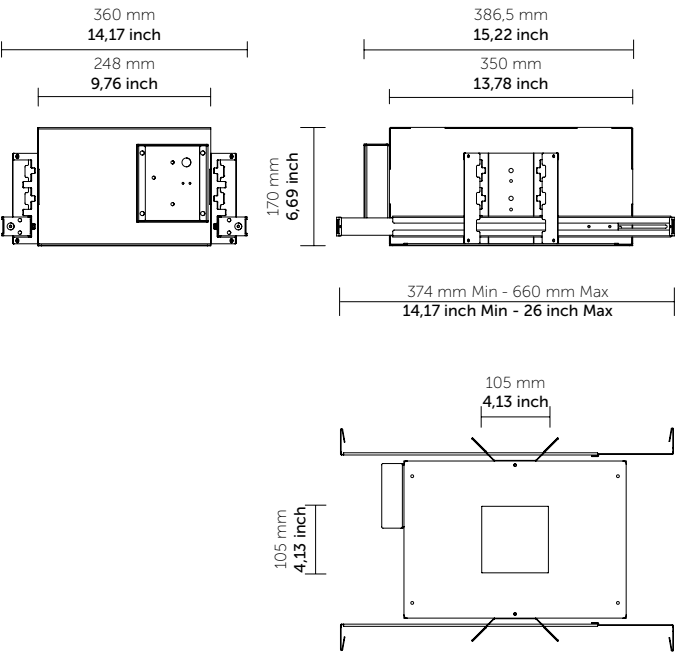

ER10 (1 LED)		
ER105 11W	ER106 10W	ER107 7W
1020 lm - 80 CRI - 3000K 1050 lm - 80 CRI - 3500K 1080 lm - 80 CRI - 4000K 820 lm - 90 CRI - 2700K 850 lm - 90 CRI - 3000K 860 lm - 90 CRI - 3500K 760 lm - 97 CRI - 3000K 710 lm - CRIMAX - 2700K 750 lm - CRIMAX - 3000K 770 lm - CRIMAX - 3500K 790 lm - CRIMAX - 4000K	850 lm - 80 CRI - 3000K 875 lm - 80 CRI - 3500K 900 lm - 80 CRI - 4000K 680 lm - 90 CRI - 2700K 710 lm - 90 CRI - 3000K 720 lm - 90 CRI - 3500K 630 lm - 97 CRI - 3000K 590 lm - CRIMAX - 2700K 620 lm - CRIMAX - 3000K 640 lm - CRIMAX - 3500K 660 lm - CRIMAX - 4000K	600 lm - 80 CRI - 3000K 615 lm - 80 CRI - 3500K 630 lm - 80 CRI - 4000K 480 lm - 90 CRI - 2700K 495 lm - 90 CRI - 3000K 505 lm - 90 CRI - 3500K 445 lm - 97 CRI - 3000K 410 lm - CRIMAX - 2700K 440 lm - CRIMAX - 3000K 450x lm - CRIMAX - 3500K 460 lm - CRIMAX - 4000K
S - Spot - 18° M - Medium - 24° W - Wide - 36°	S - Spot - 18° M - Medium - 24° W - Wide - 36°	S - Spot - 18° M - Medium - 24° W - Wide - 36°

For dry location

Ordering info

Model	Power (W)	Housing	Cri/Color	Beam	Finish
-----	-	--	----	-	--
ER10 ER10 ER10	5 (11) 6 (10) 7 (7)	BL Blank Type IC - inherently protected 01 Type NON IC – inherently protected	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example : ER105 BL 8030 M 01



ENRI 02



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed luminaire with LED lighting system.
Adjustable optical assembly is equipped with a front protection louver in tempered glass. With electronic ballast remote.




FEATURES

Power (W)	20 - 13
Light beam	Spot - Medium - Wide
Color temperature	2700K, 3000K, 3500K, 4000K
CRI	80, 90, 97, CRIMAX
Luminaire body	Steel sheet
Light sources	LED
Finishing	White, Grey, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming

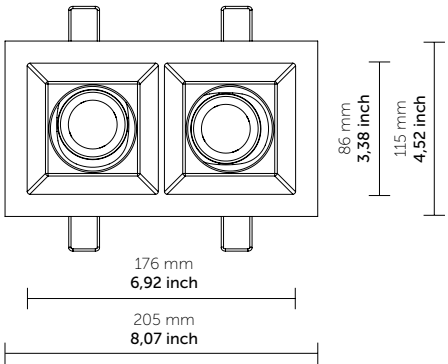

190x105 mm
7.48x4.13 inch

Housing Type: IC rated

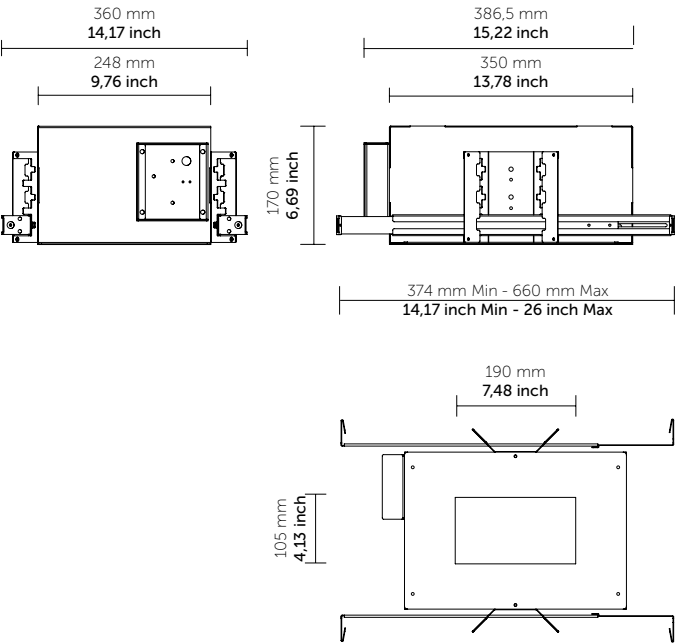

ER20 (2 LED)

ER206 20W

2x 850 lm - 80 CRI - 3000K
2x 875 lm - 80 CRI - 3500K
2x 900 lm - 80 CRI - 4000K
2x 680 lm - 90 CRI - 2700K
2x 710 lm - 90 CRI - 3000K
2x 720 lm - 90 CRI - 3500K
2x 630 lm - 97 CRI - 3000K
2x 590 lm - CRIMAX - 2700K
2x 620 lm - CRIMAX - 3000K
2x 640 lm - CRIMAX - 3500K
2x 660 lm - CRIMAX - 4000K

S - Spot - 18°
M - Medium - 24°
W - Wide - 36°

For dry location

ER207 13W

2x 565 lm - 80 CRI - 3000K
2x 580 lm - 80 CRI - 3500K
2x 595 lm - 80 CRI - 4000K
2x 450 lm - 90 CRI - 2700K
2x 465 lm - 90 CRI - 3000K
2x 475 lm - 90 CRI - 3500K
2x 420 lm - 97 CRI - 3000K
2x 390 lm - CRIMAX - 2700K
2x 415 lm - CRIMAX - 3000K
2x 425 lm - CRIMAX - 3500K
2x 435 lm - CRIMAX - 4000K

S - Spot - 18°
M - Medium - 24°
W - Wide - 36°

Ordering info

Model	Power (W)	Housing	Cri/Color	Beam	Finish
-----	-	--	----	-	--
ER20 ER20	6 (20) 7 (13)	BL Blank Type IC - inherently protected 01 Type NON IC – inherently protected	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example : **ER206 BL 8030 M 01**



ENRI 03



Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed luminaire with LED lighting system.
Adjustable optical assembly is equipped with a front protection
louver in tempered glass. With electronic ballast remote.




FEATURES

Power (W)	30 - 20
Light beam	Spot - Medium - Wide
Color temperature	2700K, 3000K, 3500K, 4000K
CRI	80, 90, 97, CRIMAX
Luminaire body	Steel sheet
Light sources	LED
Finishing	White, Grey, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming

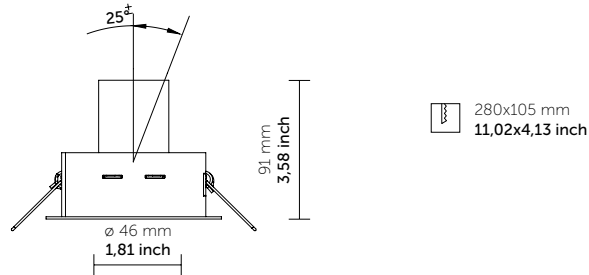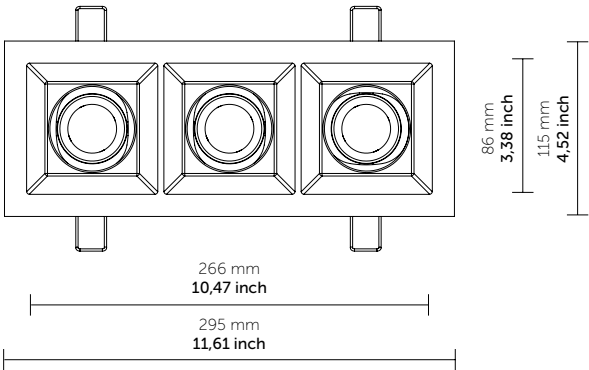

Housing Type: IC rated

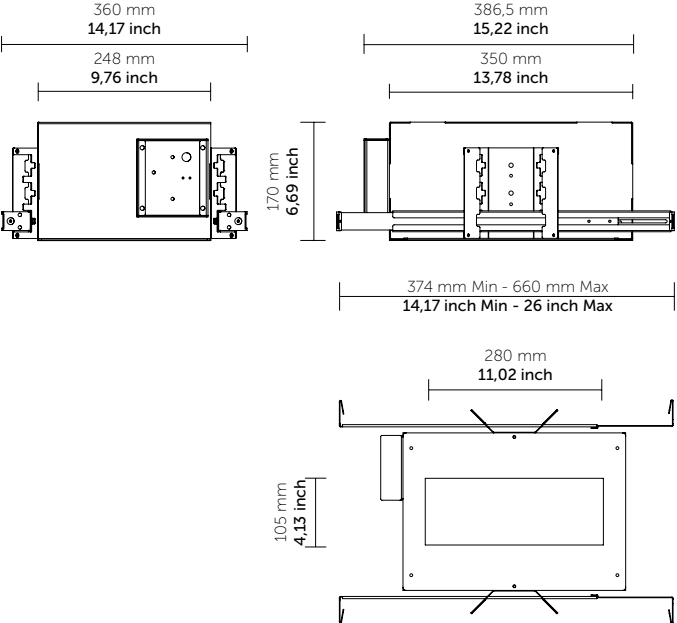

ER30 (3 LED)

ER306 30W

- 3x 850 lm - 80 CRI - 3000K
- 3x 875 lm - 80 CRI - 3500K
- 3x 900 lm - 80 CRI - 4000K
- 3x 680 lm - 90 CRI - 2700K
- 3x 710 lm - 90 CRI - 3000K
- 3x 720 lm - 90 CRI - 3500K
- 3x 630 lm - 97 CRI - 3000K
- 3x 590 lm - CRIMAX - 2700K
- 3x 620 lm - CRIMAX - 3000K
- 3x 640 lm - CRIMAX - 3500K
- 3x 660 lm - CRIMAX - 4000K

- S** - Spot - 18°
- M** - Medium - 24°
- W** - Wide - 36°

For dry location

ER307 20W

- 3x 600 lm - 80 CRI - 3000K
- 3x 615 lm - 80 CRI - 3500K
- 3x 630 lm - 80 CRI - 4000K
- 3x 480 lm - 90 CRI - 2700K
- 3x 495 lm - 90 CRI - 3000K
- 3x 505 lm - 90 CRI - 3500K
- 3x 445 lm - 97 CRI - 3000K
- 3x 410 lm - CRIMAX - 2700K
- 3x 440 lm - CRIMAX - 3000K
- 3x 450x lm - CRIMAX - 3500K
- 3x 460 lm - CRIMAX - 4000K

- S** - Spot - 18°
- M** - Medium - 24°
- W** - Wide - 36°

Ordering info

Model	Power (W)	Housing	Cri/Color	Beam	Finish
-----	-	--	----	-	--
ER30 ER30	6 (30) 7 (20)	BL Blank Type IC - inherently protected 01 Type NON IC – inherently protected	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example : **ER306 BL 8030 M 01**



ENRI 04


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed luminaire with LED lighting system.
Adjustable optical assembly is equipped with a front protection
louver in tempered glass. With electronic ballast remote.




FEATURES

Power (W)	32 - 28
Light beam	Spot - Medium - Wide
Color temperature	2700K, 3000K, 3500K, 4000K
CRI	80, 90, 97, CRIMAX
Luminaire body	Steel sheet
Light sources	LED
Finishing	White, Grey, Custom powder coat
Power supply	Electronic constant current LED driver, 120V/277V 60Hz
Dimming	Phase cut dimming

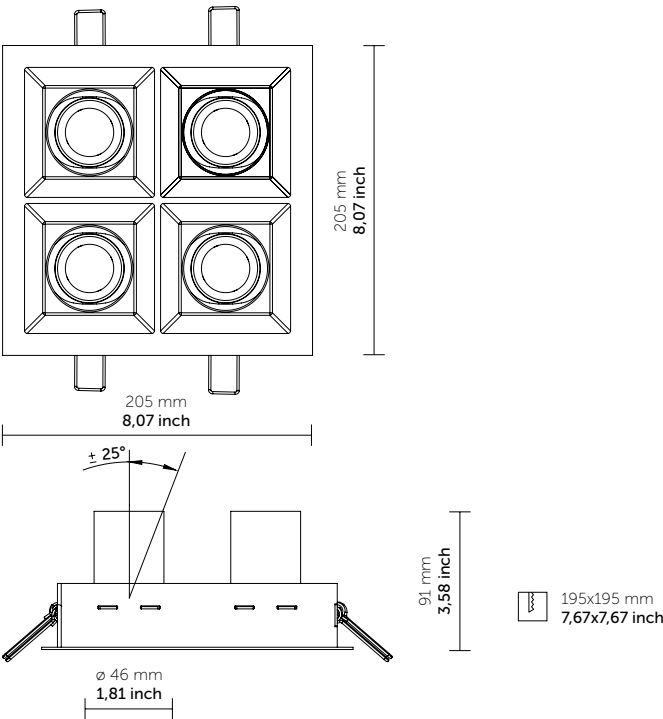

Housing Type: IC rated

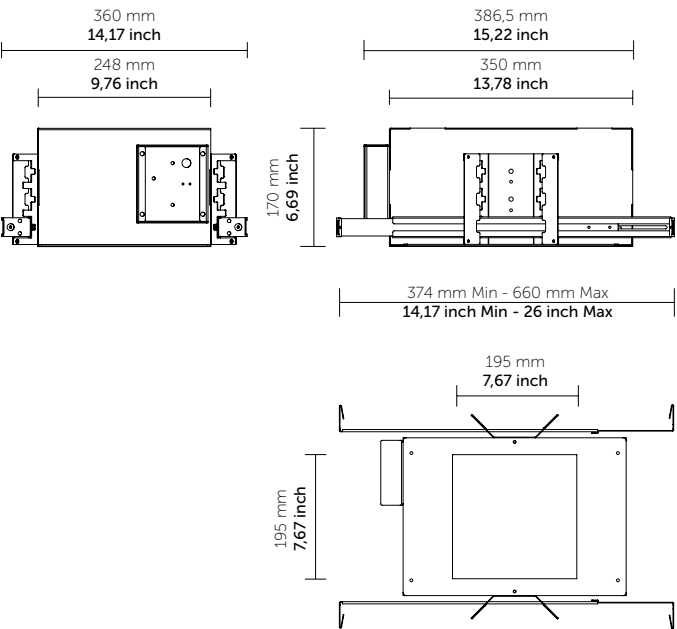

ER40 (4 LED)

ER406 32W

4x 685 lm - 80 CRI - 3000K
4x 700 lm - 80 CRI - 3500K
4x 720 lm - 80 CRI - 4000K
4x 545 lm - 90 CRI - 2700K
4x 565 lm - 90 CRI - 3000K
4x 575 lm - 90 CRI - 3500K
4x 505 lm - 97 CRI - 3000K
4x 470 lm - CRIMAX - 2700K
4x 500 lm - CRIMAX - 3000K
4x 510 lm - CRIMAX - 3500K
4x 530 lm - CRIMAX - 4000K

S - Spot - 18°
M - Medium - 24°
W - Wide - 36°

For dry location

ER407 28W

4x 600 lm - 80 CRI - 3000K
4x 615 lm - 80 CRI - 3500K
4x 630 lm - 80 CRI - 4000K
4x 480 lm - 90 CRI - 2700K
4x 495 lm - 90 CRI - 3000K
4x 505 lm - 90 CRI - 3500K
4x 445 lm - 97 CRI - 3000K
4x 410 lm - CRIMAX - 2700K
4x 440 lm - CRIMAX - 3000K
4x 450x lm - CRIMAX - 3500K
4x 460 lm - CRIMAX - 4000K

S - Spot - 18°
M - Medium - 24°
W - Wide - 36°

Ordering info

Model	Power (W)	Housing	Cri/Color	Beam	Finish
-----	-	--	----	-	--
ER40 ER40	6 (32) 7 (28)	BL Blank Type IC - inherently protected 01 Type NON IC – inherently protected	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K	S Spot M Medium W Wide Other on request	01 white 02 black Other on request

Ordering example : **ER406 BL 8030 M 01**



SMOKE


Design: QUATTROBI TECHNICAL DEPARTMENT

Adjustable projector with LED lighting system.
Optical assembly is equipped with a front protection louver .
With electronic driver.



FEATURES

Power (W)	15 - 25 - 37 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Track; G version Global(*) GES compatible; X version Global(*) XTS compatible
Luminaire housing	Aluminium alloy
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

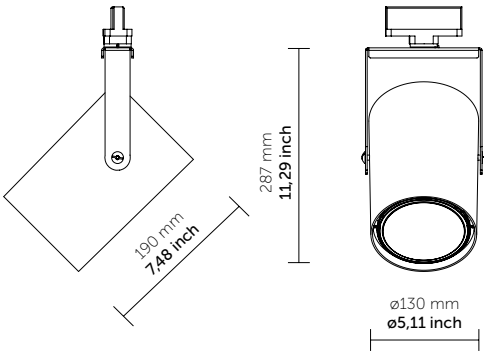

SM151 15W	SM153 25W	SM155 37W	SM157 48W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 24° W - Wide - 48°	S - Spot - 15° M - Medium - 24° W - Wide - 48°	S - Spot - 17° M - Medium - 26° W - Wide - 52°	S - Spot - 17° M - Medium - 26° W - Wide - 52°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM151 SM153 SM155 SM157	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **SM153 G 8030 M 01** For track info see page 282

Accessories

SA102
Directional louvers







SMOKE 60 01


Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15-20
Light beam (°)	Spot - Medium - Wide
Installation	Suspension; G version Global(*) GES compatible; X version - Global(*) XTS compatible;
Luminaire housing	Aluminium alloys
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

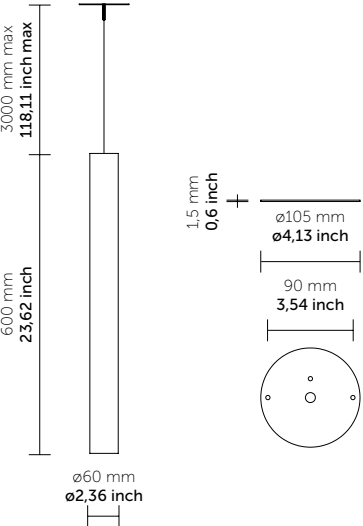

SM160 15W	SM161 20W
1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 19° M - Medium - 38° W - Wide - 55°	S - Spot - 19° M - Medium - 38° W - Wide - 55°

For dry location

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM160 15W120V SM161 20W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 03 ... Other on request

Ordering example : **SM160 G 8030 M 01**



SMOKE 60 02


Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15-20
Light beam (°)	Spot - Medium - Wide
Installation	Suspension; G version Global(*) GES compatible; X version - Global(*) XTS compatible;
Luminaire housing	Aluminium alloys
Protective screen	polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

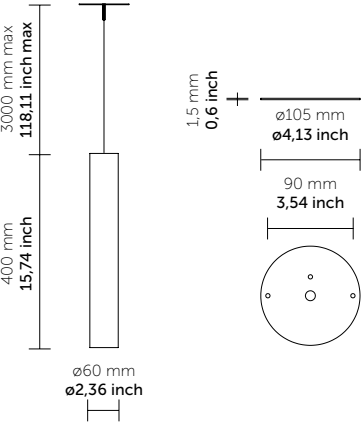

SM162 15W	SM163 20W
1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 19° M - Medium - 38° W - Wide - 55°	S - Spot - 19° M - Medium - 38° W - Wide - 55°

For dry location

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM162 15W120V SM163 20W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9030 90CRI/3000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 03 ... Other on request

Ordering example : **SM162 G 8030 M 01**





SMOKE 130


Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 25 - 37 - 48
Light beam (°)	Spot - Medium - Wide
Installation	G version Global(*), track or on Jbox
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming, 0-10V dim

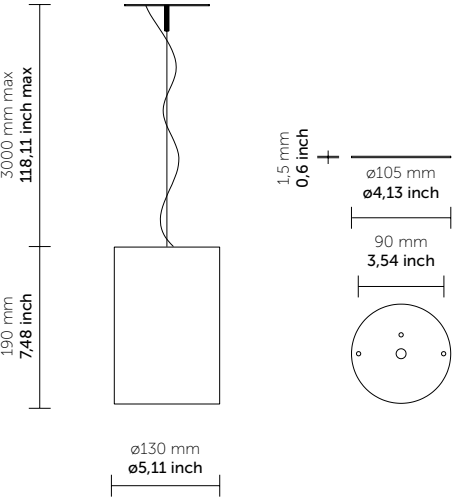

SM251 15W	SM253 25W	SM255 37W	SM257 48W
1575 lm - 80 CRI - 3000K 1611 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1000 lm - 90 CRI - 2400K (FLS) 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
1575 lm - F90 CRI - 3000K 1611 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 24° W - Wide - 48°	S - Spot - 15° M - Medium - 24° W - Wide - 48°	S - Spot - 17° M - Medium - 26° W - Wide - 52°	S - Spot - 17° M - Medium - 26° W - Wide - 52°

For dry location 

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM251 15W120V SM253 25W120V SM255 37W120V SM257 48W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **SM251 G 8030 M 01**





POP 60 adjustable




Design: QUATTROBI TECHNICAL DEPARTMENT

FOCUS recessed adjustable lighting fixture.



FEATURES

Power (W)	21
Light beam (°)	Spot - Medium - Wide
Installation	False ceiling
Luminaire housing	Drawn Aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

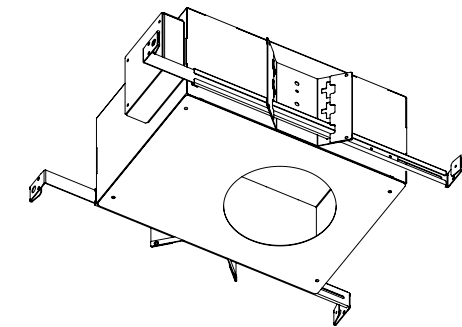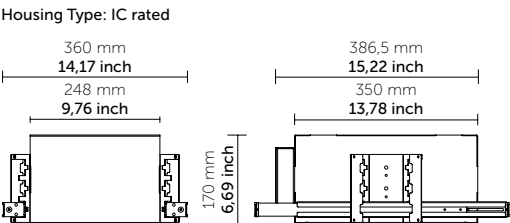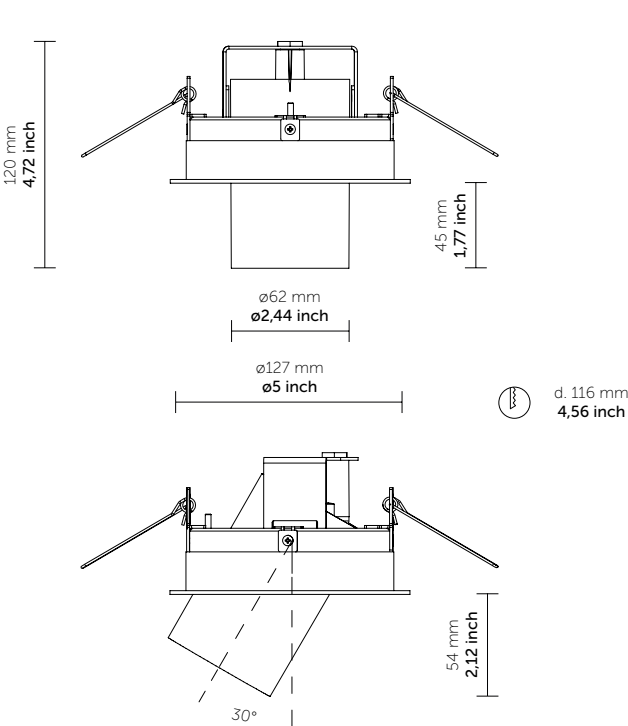

PA002 21W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot
M - Medium
W - Wide

For dry location

Ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
PA002	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **PA002 9730 M 02**



POP 60 FIX



Design: QUATTROBI TECHNICAL DEPARTMENT

POP recessed adjustable lighting fixture.



FEATURES

Power (W)	10
Light beam (°)	Spot - Medium - Wide
Installation	False ceiling
Luminaire housing	Drawn Aluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

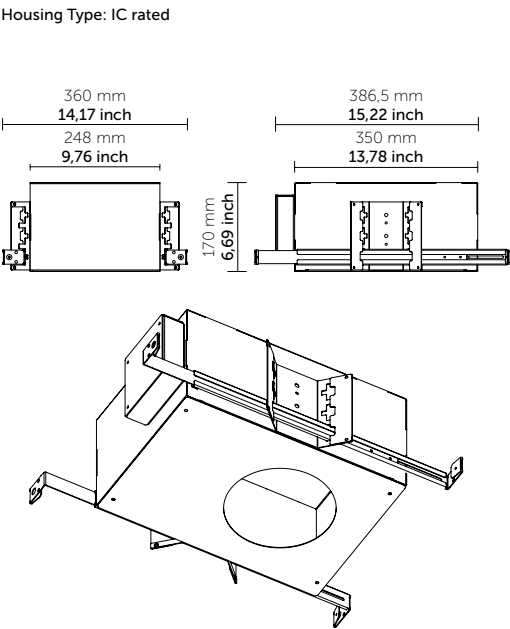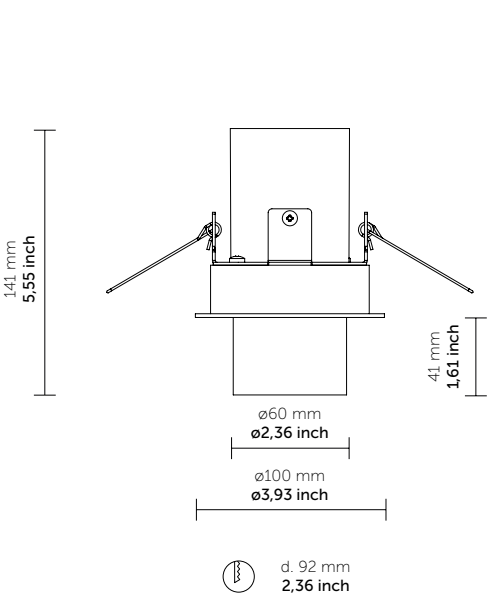

Housing Type: IC rated

PX002 10W

900 lm - 80 CRI - 3000K
932 lm - 80 CRI - 3500K
948 lm - 80 CRI - 4000K
720 lm - 90 CRI - 2700K
764 lm - 90 CRI - 3000K
756 lm - 90 CRI - 3500K
662 lm - 97 CRI - 3000K

620 lm - CRIMAX - 2700K
659 lm - CRIMAX - 3000K
675 lm - CRIMAX - 3500K
695 lm - CRIMAX - 4000K

900 lm - F90 CRI - 3000K
932 lm - F90 CRI - 3500K
948 lm - F90 CRI - 4000K

S - Spot
M - Medium
W - Wide

For dry location

Ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
PX002	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **PX002 9730 M 02**



PENNA 130
Design: QUATTROBI TECHNICAL DEPARTMENT

Custom made cylindrical LED suspension, titanium glossy frame.
Optical assembly equipped with a front protection louver. Driver included.

DU001 14W


518 lm - 80 CRI – 3000K
451 lm - 90 CRI – 3000K
551 lm - 80 CRI – 4000K
472 lm - 90 CRI – 4000K

W - Wide

For dry location 

FEATURES

Power (W)	14
Light beam (°)	Wide
Installation	Suspension Canopy
Luminaire housing	Steel and PMMA
Protective screen	Opal PMMA
Light sources	LED
Finishing	Titanium glossy
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

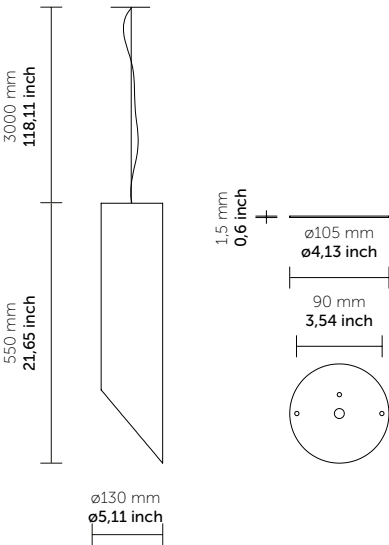

Ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
DU001	8030 80CRI/3000K 9030 90CRI/3000K 8040 80CRI/4000K 9040 90CRI/4000K	W Wide Other on request	19 Titanium glossy

Ordering example : **DU001 9030 W 19**



PENNA 450

Design: QUATTROBI TECHNICAL DEPARTMENT

Custom made cylindrical LED suspension, titanium glossy frame.
Optical assembly equipped with a front protection louver. Driver included.

DU011 16W


1950 lm - 80 CRI – 3000K
1668 lm - 90 CRI – 3000K
2008 lm - 80 CRI – 4000K
1744 lm - 90 CRI – 4000K

W - Wide

For dry location 

FEATURES

Power (W)	16
Light beam (°)	Wide
Installation	Suspension Canopy /4 ft cable
Luminaire housing	Steel and PMMA
Protective screen	Opal PMMA
Light sources	LED
Finishing	Titanium glossy
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

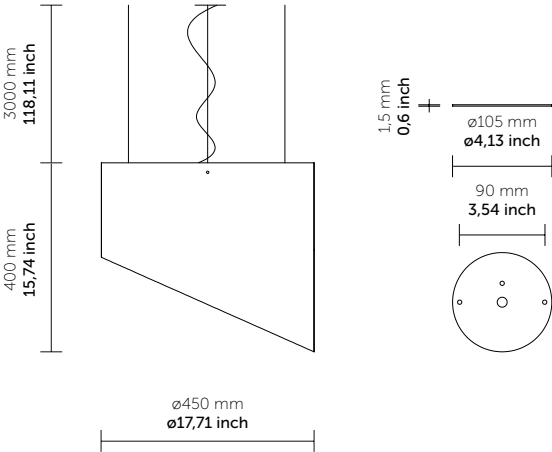

Ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
DU011	8030 80CRI/3000K 9030 90CRI/3000K 8040 80CRI/4000K 9040 90CRI/4000K	W Wide Other on request	19 Titanium glossy

Ordering example : **DU011 8030 W 19**




PENNA 650

Design: QUATTROBI TECHNICAL DEPARTMENT

Custom made cylindrical LED suspension, titanium glossy frame. Optical assembly equipped with a front protection louver. Driver included.

FEATURES

Power (W)	16
Light beam (°)	Wide
Installation	Suspension Canopy /4 ft cable
Luminaire housing	Steel and PMMA
Protective screen	Opal PMMA
Light sources	LED
Finishing	Titanium glossy
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

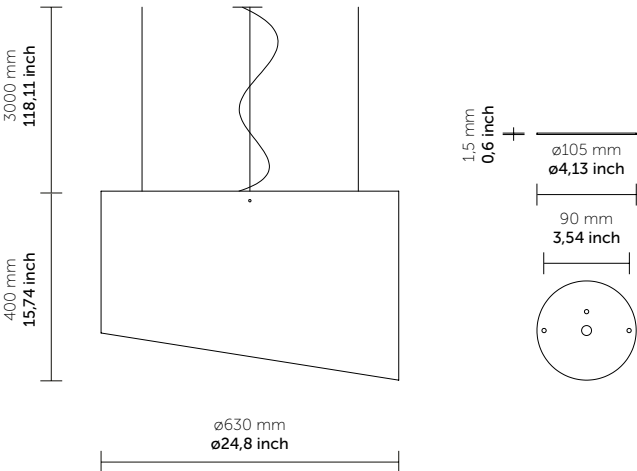

DU021 16W

1950 lm - 80 CRI – 3000K
1668 lm - 90 CRI – 3000K
2008 lm - 80 CRI – 4000K
1744 lm - 90 CRI – 4000K

W - Wide

For dry location 

Ordering info

Model	Cri/Color	Beam	Finish
----	----	-	--
DU021	8030 80CRI/3000K 9030 90CRI/3000K 8040 80CRI/4000K 9040 90CRI/4000K	W Wide Other on request	19 Titanium glossy

Ordering example : **DU021 8030 W 19**



MEDUSA


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system. Higt-bay installation. Optical assembly is equipped with a front protection louver in tempered glass. With electronic ballast.



FEATURES

Power (W)	25 - 37 - 48
Light beam (°)	Wide
Installation	Canopy
Luminaire housing	Drawn Alluminium
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

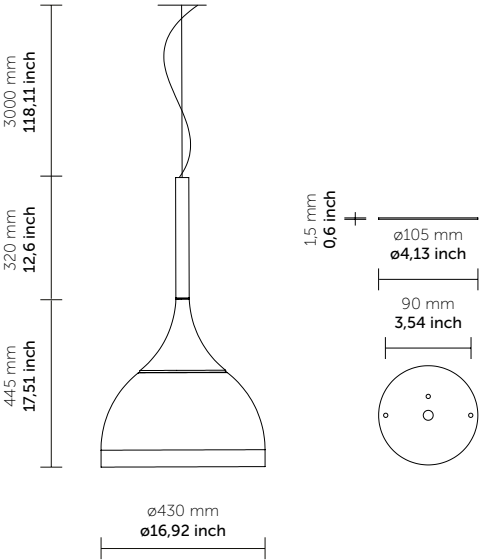

SI300 25W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
1560 lm - 90 CRI - 2400K (FLS)
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 15°
M - Medium - 24°
W - Wide - 48°

For dry location 

SI301 37W

4084 lm - 80 CRI - 3000K
4178 lm - 80 CRI - 3500K
4304 lm - 80 CRI - 4000K
2550 lm - 90 CRI - 2400K (FLS)
3267 lm - 90 CRI - 2700K
3390 lm - 90 CRI - 3000K
3431 lm - 90 CRI - 3500K
3002 lm - 97 CRI - 3000K

2814 lm - CRIMAX - 2700K
2994 lm - CRIMAX - 3000K
3062 lm - CRIMAX - 3500K
3155 lm - CRIMAX - 4000K

4084 lm - F90 CRI - 3000K
4178 lm - F90 CRI - 3500K
4304 lm - F90 CRI - 4000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

SI302 48W

5022 lm - 80 CRI - 3000K
5138 lm - 80 CRI - 3500K
5293 lm - 80 CRI - 4000K
3400 lm - 90 CRI - 2400K (FLS)
4018 lm - 90 CRI - 2700K
4168 lm - 90 CRI - 3000K
4218 lm - 90 CRI - 3500K
3691 lm - 97 CRI - 3000K

3460 lm - CRIMAX - 2700K
3681 lm - CRIMAX - 3000K
3766 lm - CRIMAX - 3500K
3880 lm - CRIMAX - 4000K

5022 lm - F90 CRI - 3000K
5138 lm - F90 CRI - 3500K
5293 lm - F90 CRI - 4000K

S - Spot - 17°
M - Medium - 26°
W - Wide - 52°

Ordering info

Model	Cri/Color	Beam	Finish
-----	----	-	--
SI300 25W120V SI301 37W120V SI302 48W120V	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : SI300 8024 W 02



INK


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	18 - 25 - 37 - 48
Light beam (°)	Spot - Medium - Wide
Installation	Track; S version Onetrack (*) compatible, X version Global (*), XTS compatible, G Global GES compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

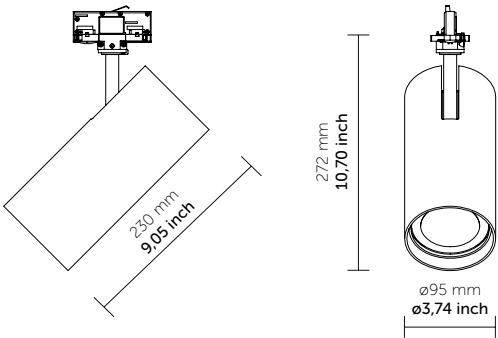

0° - 90° vertical tilting / 355° horizontal rotation

(*) ONETRACK is a registered trade mark of A.A.G. STUCCHI

(*) Global is a registered trade mark of Nordic Aluminium

IK101 18W	IK103 25W	IK105 37W	IK107 48W
2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K	2513 lm - 80 CRI - 3000K 2571 lm - 80 CRI - 3500K 2649 lm - 80 CRI - 4000K 1560 lm - 90 CRI - 2400K (FLS) 2010 lm - 90 CRI - 2700K 2086 lm - 90 CRI - 3000K 2111 lm - 90 CRI - 3500K 1847 lm - 97 CRI - 3000K	4084 lm - 80 CRI - 3000K 4178 lm - 80 CRI - 3500K 4304 lm - 80 CRI - 4000K 2550 lm - 90 CRI - 2400K (FLS) 3267 lm - 90 CRI - 2700K 3390 lm - 90 CRI - 3000K 3431 lm - 90 CRI - 3500K 3002 lm - 97 CRI - 3000K	5022 lm - 80 CRI - 3000K 5138 lm - 80 CRI - 3500K 5293 lm - 80 CRI - 4000K 3400 lm - 90 CRI - 2400K (FLS) 4018 lm - 90 CRI - 2700K 4168 lm - 90 CRI - 3000K 4218 lm - 90 CRI - 3500K 3691 lm - 97 CRI - 3000K
1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K	1732 lm - CRIMAX - 2700K 1842 lm - CRIMAX - 3000K 1884 lm - CRIMAX - 3500K 1941 lm - CRIMAX - 4000K	2814 lm - CRIMAX - 2700K 2994 lm - CRIMAX - 3000K 3062 lm - CRIMAX - 3500K 3155 lm - CRIMAX - 4000K	3460 lm - CRIMAX - 2700K 3681 lm - CRIMAX - 3000K 3766 lm - CRIMAX - 3500K 3880 lm - CRIMAX - 4000K
2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K	2513 lm - F90 CRI - 3000K 2571 lm - F90 CRI - 3500K 2649 lm - F90 CRI - 4000K	4084 lm - F90 CRI - 3000K 4178 lm - F90 CRI - 3500K 4304 lm - F90 CRI - 4000K	5022 lm - F90 CRI - 3000K 5138 lm - F90 CRI - 3500K 5293 lm - F90 CRI - 4000K
S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 15° M - Medium - 34° W - Wide - 51°	S - Spot - 21° M - Medium - 43° W - Wide - 51°	S - Spot - 21° M - Medium - 43° W - Wide - 51°

For dry location

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
----	-	----	-	--
IK101 18W120V IK103 25W120V IK105 37W120V IK107 48W120V	S Stucchi Onetrack(*) compatible X Global(*) XTS compatible G Global(*) GES compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IK101 S 8030 M 01** For track info see page 282



MINI INK


Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



FEATURES

Power (W)	15 - 20 - 26
Light beam (°)	Spot - Medium - Wide - Elliptical
Installation	Track: G version Global(*) GES compatible ; X version - Global (*) XTS compatible; S version Onetrack compatible
Luminaire housing	Aluminium alloys
Protective screen	Tempered glass
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V 60Hz
Dimming	Phase cut dimming

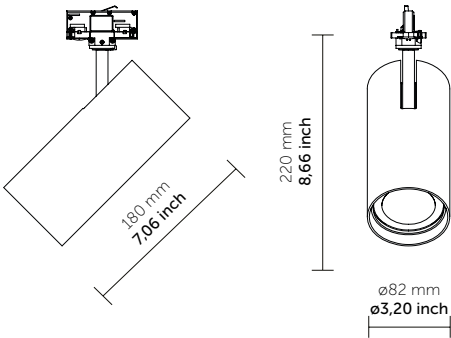

0° - 90° vertical tilting / 355° horizontal rotation

IK201 15W

1575 lm - 80 CRI - 3000K
1611 lm - 80 CRI - 3500K
1660 lm - 80 CRI - 4000K
1260 lm - 90 CRI - 2700K
1307 lm - 90 CRI - 3000K
1323 lm - 90 CRI - 3500K
1158 lm - 97 CRI - 3000K

1085 lm - CRIMAX - 2700K
1154 lm - CRIMAX - 3000K
1181 lm - CRIMAX - 3500K
1217 lm - CRIMAX - 4000K

1575 lm - F90 CRI - 3000K
1611 lm - F90 CRI - 3500K
1660 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

For dry location

IK203 20W

2246 lm - 80 CRI - 3000K
2298 lm - 80 CRI - 3500K
2367 lm - 80 CRI - 4000K
1797 lm - 90 CRI - 2700K
1864 lm - 90 CRI - 3000K
1887 lm - 90 CRI - 3500K
1651 lm - 97 CRI - 3000K

1548 lm - CRIMAX - 2700K
1646 lm - CRIMAX - 3000K
1684 lm - CRIMAX - 3500K
1735 lm - CRIMAX - 4000K

2246 lm - F90 CRI - 3000K
2298 lm - F90 CRI - 3500K
2367 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

IK205 26W

2513 lm - 80 CRI - 3000K
2571 lm - 80 CRI - 3500K
2649 lm - 80 CRI - 4000K
2010 lm - 90 CRI - 2700K
2086 lm - 90 CRI - 3000K
2111 lm - 90 CRI - 3500K
1847 lm - 97 CRI - 3000K

1732 lm - CRIMAX - 2700K
1842 lm - CRIMAX - 3000K
1884 lm - CRIMAX - 3500K
1941 lm - CRIMAX - 4000K

2513 lm - F90 CRI - 3000K
2571 lm - F90 CRI - 3500K
2649 lm - F90 CRI - 4000K

S - Spot - 18°
M - Medium - 36°
W - Wide – 51°
E - Elliptical – 70°X 36°

Ordering info

Model	Adapter	Cri/Color	Dimming	Beam	Finish
----	-	----		-	--
IK201 15W120V IK203 20W120V IK205 26W120V	S Stucchi Onetrack(*) compatible X Global(*) XTS compatible G Global(*) GES compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K	0 Phase cut dimming (Leading Edge or Trailing Edge)	S Spot M Medium W Wide EL Elliptical Other on request	01 white 02 black 18 grey Other on request

Ordering example : IK201 S 8030 0 M 01 For track info see page 282

EMA / MICRO EMA

Is a track system designed to fit in tight spaces.

Components

The system is composed of a track and a set of dedicated LED lighting modules that include projectors, linear projectors, and pendants.

The track is made of an extruded aluminum profile available in both linear and custom curved shapes for a recessed, on the surface, or suspended installation.


Installation

Without the need for tools, the lighting modules are installed by hand via a click mounting that automatically connects them to the electrified part inside the track.

Since the system operates on low voltage, the lighting modules can be safely installed and adjusted even while the power is on.

Once the track is installed, you can change the layout of your display space and adjust the lighting without the intervention of the electrician. You can quickly add/remove lighting modules and have instant feedback while orienting the light beams on your product.

The very small profile and light modules allow installation in spaces where there is a need for good frontal illumination and accent lighting.

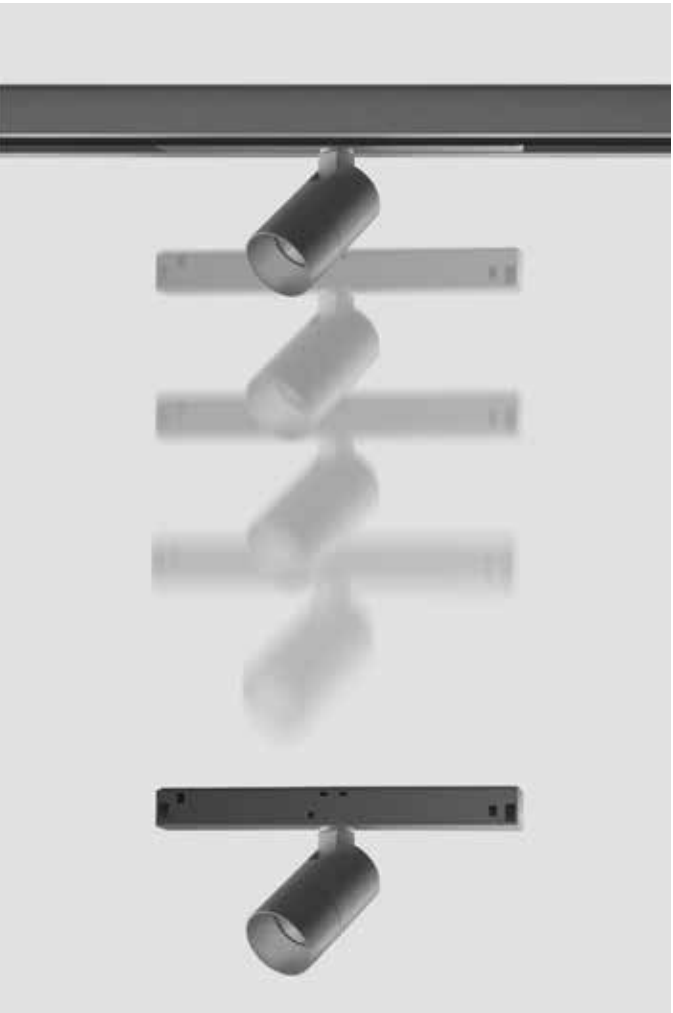

Comparison



LED strip



Micro EMA



EMA 01

Design: QUATTROBI TECHNICAL DEPARTMENT


Low voltage led track light projector with fastening system.



FEATURES


Power (W)	12 - 14 - 16 - 18 - 20
Light beam (°)	Spot - Medium - Wide
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V (Dim to off), Dali

M1001

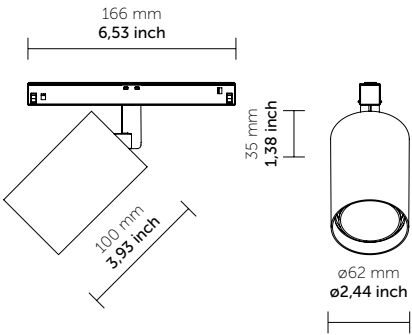


Only for track serie 9500 Evo type
ST1, ST3, ST6, ST8

M1021

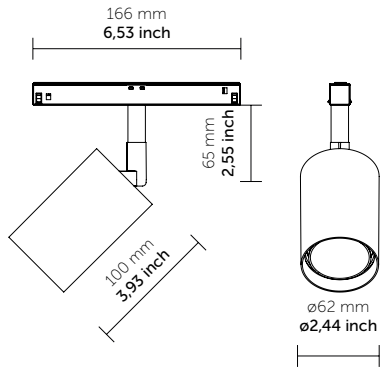

For all track type
(Serie Multisystem Evo 9500)

M1031

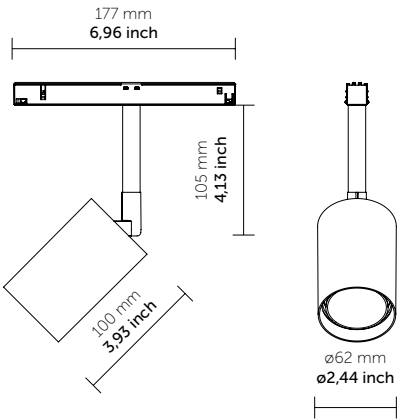

For all track type
(Serie Multisystem Evo 9500)

M1008 12W M1028 12W M1038 12W	M1007 14W M1027 14W M1037 14W	M1006 16W M1026 16W M1036 16W	M1005 18W M1025 18W M1035 18W	M1001 20W M1021 20W M1031 20W
1378 lm - 80 CRI - 3000K 1426 lm - 80 CRI - 3500K 1453 lm - 80 CRI - 4000K 1103 lm - 90 CRI - 2700K 1144 lm - 90 CRI - 3000K 1158 lm - 90 CRI - 3500K 1013 lm - 97 CRI - 3000K	1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	1797 lm - 80 CRI - 3000K 1838 lm - 80 CRI - 3500K 1894 lm - 80 CRI - 4000K 1438 lm - 90 CRI - 2700K 1491 lm - 90 CRI - 3000K 1510 lm - 90 CRI - 3500K 1321 lm - 97 CRI - 3000K	2021 lm - 80 CRI - 3000K 2068 lm - 80 CRI - 3500K 2130 lm - 80 CRI - 4000K 1617 lm - 90 CRI - 2700K 1678 lm - 90 CRI - 3000K 1698 lm - 90 CRI - 3500K 1486 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
949 lm - CRIMAX - 2700K 1010 lm - CRIMAX - 3000K 1033 lm - CRIMAX - 3500K 1065 lm - CRIMAX - 4000K	1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1238 lm - CRIMAX - 2700K 1317 lm - CRIMAX - 3000K 1347 lm - CRIMAX - 3500K 1388 lm - CRIMAX - 4000K	1393 lm - CRIMAX - 2700K 1481 lm - CRIMAX - 3000K 1516 lm - CRIMAX - 3500K 1562 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1378 lm - F90 CRI - 3000K 1426 lm - F90 CRI - 3500K 1453 lm - F90 CRI - 4000K	1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	1797 lm - F90 CRI - 3000K 1838 lm - F90 CRI - 3500K 1894 lm - F90 CRI - 4000K	2021 lm - F90 CRI - 3000K 2068 lm - F90 CRI - 3500K 2130 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°

For dry location



Ordering info


Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M100 M102 M103	1 (20) 5 (18) 6 (16) 7 (14) 8 (12)	K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example :**M1001 K 8030 M A 01** For track info see page 226


(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

Accessories


SN60 .01 / .02 / .03
Accessory Snoot



HC60 .02
Accessory Honeycomb



EL60 .02
Accessory Elliptical Lens





EMA 01 150


Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led track light projector with fastening system.



FEATURES

Power (W)	12 - 14 - 16 - 18 - 20
Light beam (°)	Spot - Medium - Wide
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V dim (Dim to off), Dali

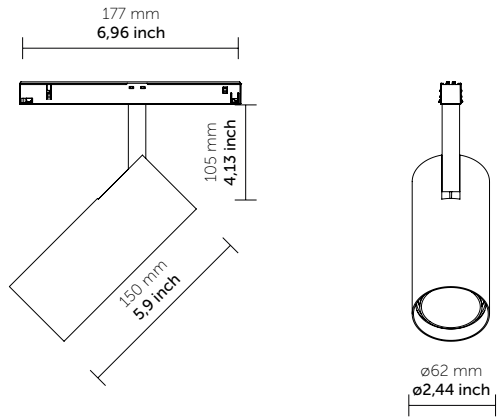

For all track type

M1508 12W	M1507 14W	M1506 16W	M1505 18W	M1501 20W
1378 lm - 80 CRI - 3000K 1426 lm - 80 CRI - 3500K 1453 lm - 80 CRI - 4000K 1103 lm - 90 CRI - 2700K 1144 lm - 90 CRI - 3000K 1158 lm - 90 CRI - 3500K 1013 lm - 97 CRI - 3000K	1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	1797 lm - 80 CRI - 3000K 1838 lm - 80 CRI - 3500K 1894 lm - 80 CRI - 4000K 1438 lm - 90 CRI - 2700K 1491 lm - 90 CRI - 3000K 1510 lm - 90 CRI - 3500K 1321 lm - 97 CRI - 3000K	2021 lm - 80 CRI - 3000K 2068 lm - 80 CRI - 3500K 2130 lm - 80 CRI - 4000K 1617 lm - 90 CRI - 2700K 1678 lm - 90 CRI - 3000K 1698 lm - 90 CRI - 3500K 1486 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
949 lm - CRIMAX - 2700K 1010 lm - CRIMAX - 3000K 1033 lm - CRIMAX - 3500K 1065 lm - CRIMAX - 4000K	1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1238 lm - CRIMAX - 2700K 1317 lm - CRIMAX - 3000K 1347 lm - CRIMAX - 3500K 1388 lm - CRIMAX - 4000K	1393 lm - CRIMAX - 2700K 1481 lm - CRIMAX - 3000K 1516 lm - CRIMAX - 3500K 1562 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1378 lm - F90 CRI - 3000K 1426 lm - F90 CRI - 3500K 1453 lm - F90 CRI - 4000K	1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	1797 lm - F90 CRI - 3000K 1838 lm - F90 CRI - 3500K 1894 lm - F90 CRI - 4000K	2021 lm - F90 CRI - 3000K 2068 lm - F90 CRI - 3500K 2130 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°

For dry location

Ordering info

Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M150	1 (20) 5 (18) 6 (16) 7 (14) 8 (12)	K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example :M1501 K 8030 M A 01 For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit



EMA 01 REVERSE


Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led track light projector with fastening system.



FEATURES

Power (W)	12 - 14 - 16 - 18 - 20
Light beam (°)	Spot - Medium - Wide
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V dim (Dim to off), Dali

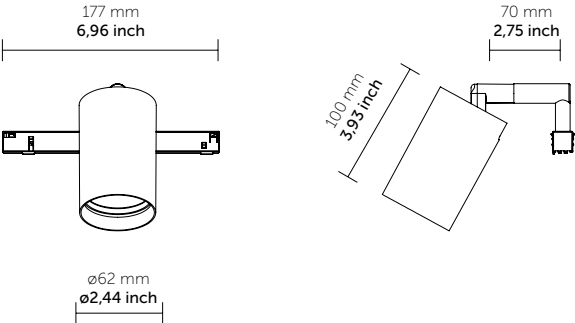

For all track type

M1R08 12W	M1R07 14W	M1R06 16W	M1R05 18W	M1R01 20W
1378 lm - 80 CRI - 3000K 1426 lm - 80 CRI - 3500K 1453 lm - 80 CRI - 4000K 1103 lm - 90 CRI - 2700K 1144 lm - 90 CRI - 3000K 1158 lm - 90 CRI - 3500K 1013 lm - 97 CRI - 3000K	1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	1797 lm - 80 CRI - 3000K 1838 lm - 80 CRI - 3500K 1894 lm - 80 CRI - 4000K 1438 lm - 90 CRI - 2700K 1491 lm - 90 CRI - 3000K 1510 lm - 90 CRI - 3500K 1321 lm - 97 CRI - 3000K	2021 lm - 80 CRI - 3000K 2068 lm - 80 CRI - 3500K 2130 lm - 80 CRI - 4000K 1617 lm - 90 CRI - 2700K 1678 lm - 90 CRI - 3000K 1698 lm - 90 CRI - 3500K 1486 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
949 lm - CRIMAX - 2700K 1010 lm - CRIMAX - 3000K 1033 lm - CRIMAX - 3500K 1065 lm - CRIMAX - 4000K	1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1238 lm - CRIMAX - 2700K 1317 lm - CRIMAX - 3000K 1347 lm - CRIMAX - 3500K 1388 lm - CRIMAX - 4000K	1393 lm - CRIMAX - 2700K 1481 lm - CRIMAX - 3000K 1516 lm - CRIMAX - 3500K 1562 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1378 lm - F90 CRI - 3000K 1426 lm - F90 CRI - 3500K 1453 lm - F90 CRI - 4000K	1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	1797 lm - F90 CRI - 3000K 1838 lm - F90 CRI - 3500K 1894 lm - F90 CRI - 4000K	2021 lm - F90 CRI - 3000K 2068 lm - F90 CRI - 3500K 2130 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°

For dry location

Ordering info

Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M1R0	1 (20) 5 (18) 6 (16) 7 (14) 8 (12)	K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example : **M1R01 K 8030 M A 01** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit



EMA 01 SUSPENDED


Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led track light projector with fastening system.



FEATURES

Power (W)	12 - 14 - 16 - 18 - 20
Light beam (°)	Spot - Medium - Wide
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V dim (Dim to off), Dali

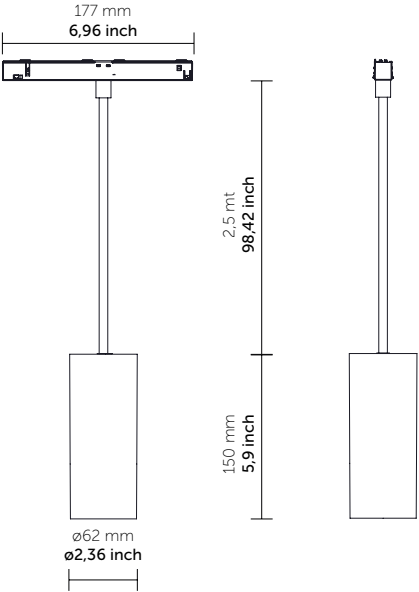

For all track type

M1008 12W	M1007 14W	M1006 16W	M1005 18W	M1001 20W
1378 lm - 80 CRI - 3000K 1426 lm - 80 CRI - 3500K 1453 lm - 80 CRI - 4000K 1103 lm - 90 CRI - 2700K 1144 lm - 90 CRI - 3000K 1158 lm - 90 CRI - 3500K 1013 lm - 97 CRI - 3000K	1575 lm - 80 CRI - 3000K 1630 lm - 80 CRI - 3500K 1660 lm - 80 CRI - 4000K 1260 lm - 90 CRI - 2700K 1307 lm - 90 CRI - 3000K 1323 lm - 90 CRI - 3500K 1158 lm - 97 CRI - 3000K	1797 lm - 80 CRI - 3000K 1838 lm - 80 CRI - 3500K 1894 lm - 80 CRI - 4000K 1438 lm - 90 CRI - 2700K 1491 lm - 90 CRI - 3000K 1510 lm - 90 CRI - 3500K 1321 lm - 97 CRI - 3000K	2021 lm - 80 CRI - 3000K 2068 lm - 80 CRI - 3500K 2130 lm - 80 CRI - 4000K 1617 lm - 90 CRI - 2700K 1678 lm - 90 CRI - 3000K 1698 lm - 90 CRI - 3500K 1486 lm - 97 CRI - 3000K	2246 lm - 80 CRI - 3000K 2298 lm - 80 CRI - 3500K 2367 lm - 80 CRI - 4000K 1797 lm - 90 CRI - 2700K 1864 lm - 90 CRI - 3000K 1887 lm - 90 CRI - 3500K 1651 lm - 97 CRI - 3000K
949 lm - CRIMAX - 2700K 1010 lm - CRIMAX - 3000K 1033 lm - CRIMAX - 3500K 1065 lm - CRIMAX - 4000K	1085 lm - CRIMAX - 2700K 1154 lm - CRIMAX - 3000K 1181 lm - CRIMAX - 3500K 1217 lm - CRIMAX - 4000K	1238 lm - CRIMAX - 2700K 1317 lm - CRIMAX - 3000K 1347 lm - CRIMAX - 3500K 1388 lm - CRIMAX - 4000K	1393 lm - CRIMAX - 2700K 1481 lm - CRIMAX - 3000K 1516 lm - CRIMAX - 3500K 1562 lm - CRIMAX - 4000K	1548 lm - CRIMAX - 2700K 1646 lm - CRIMAX - 3000K 1684 lm - CRIMAX - 3500K 1735 lm - CRIMAX - 4000K
1378 lm - F90 CRI - 3000K 1426 lm - F90 CRI - 3500K 1453 lm - F90 CRI - 4000K	1575 lm - F90 CRI - 3000K 1630 lm - F90 CRI - 3500K 1660 lm - F90 CRI - 4000K	1797 lm - F90 CRI - 3000K 1838 lm - F90 CRI - 3500K 1894 lm - F90 CRI - 4000K	2021 lm - F90 CRI - 3000K 2068 lm - F90 CRI - 3500K 2130 lm - F90 CRI - 4000K	2246 lm - F90 CRI - 3000K 2298 lm - F90 CRI - 3500K 2367 lm - F90 CRI - 4000K
S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°	S - Spot - 16° M - Medium - 32° W - Wide - 50°

For dry location



Ordering info

Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M100	1 (20) 5 (18) 6 (16) 7 (14) 8 (12)	S Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example :**M1001 S 8030 M A 01** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit







EMA 02

Design: QUATTROBI TECHNICAL DEPARTMENT


Low voltage led track light projector with fastening system.



FEATURES


Power (W)	7 - 9
Light beam (°)	Spot - Medium - Wide - Elliptical
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V dim (Dim to off), Dali

M2002

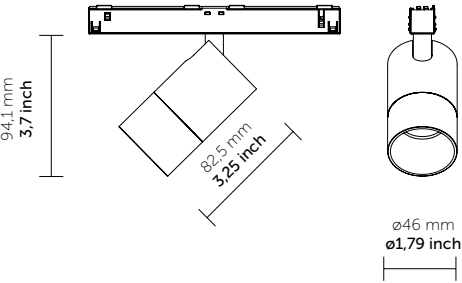

Only for track serie 9500 Evo type
ST1, ST3, ST6, ST8

M2022

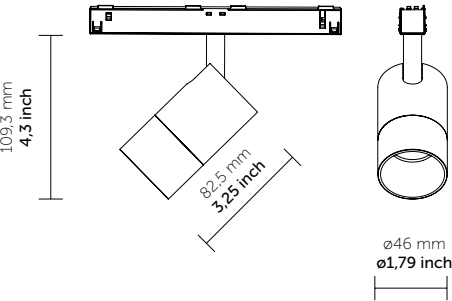

For all track type
(Serie Multisystem Evo 9500)

0° - 90° vertical tilting / 355° horizontal rotation

M2005 7W M2025 7W

685 lm - 80 CRI - 3000K
700 lm - 80 CRI - 3500K
722 lm - 80 CRI - 4000K
546 lm - 90 CRI - 2700K
567 lm - 90 CRI - 3000K
574 lm - 90 CRI - 3500K
506 lm - 97 CRI - 3000K

475 lm - CRIMAX - 2700K
502 lm - CRIMAX - 3000K
514 lm - CRIMAX - 3500K
528 lm - CRIMAX - 4000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

M2002 9W M2022 9W

854 lm - 80 CRI - 3000K
874 lm - 80 CRI - 3500K
900 lm - 80 CRI - 4000K
683 lm - 90 CRI - 2700K
709 lm - 90 CRI - 3000K
717 lm - 90 CRI - 3500K
632 lm - 97 CRI - 3000K

588 lm - CRIMAX - 2700K
626 lm - CRIMAX - 3000K
640 lm - CRIMAX - 3500K
660 lm - CRIMAX - 4000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

For dry location 

Ordering info

Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M200 M202	2 (9) 5 (7)	K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example :**M2002 K 8035 M A 01** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit



EMA 03

Design: QUATTROBI TECHNICAL DEPARTMENT


Low voltage led track light projector with fastening system.



FEATURES


Power (W)	5 - 7
Light beam (°)	Spot - Medium - Elliptical
Installation	Track Serie Multisystem Evo 9500
Luminaire housing	Aluminium alloys
Light sources	LED
Finishing	White, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 -10V dim (Dim to off), Dali

M3003

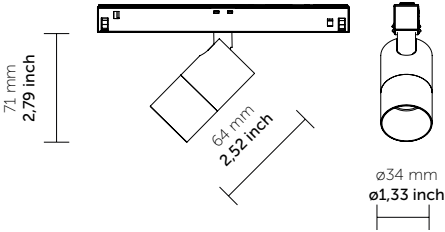

Only for track serie 9500 Evo type
ST1, ST3, ST6, ST8

M3023

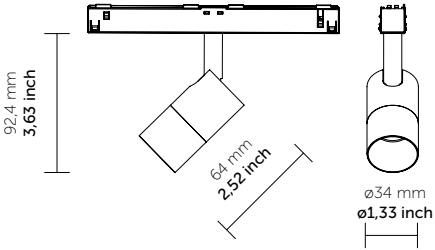

For all track type
(Serie Multisystem Evo 9500)

M3005 5W M3025 5W

336 lm - 80 CRI - 3000K
345 lm - 80 CRI - 3500K
355 lm - 80 CRI - 4000K
269 lm - 90 CRI - 2700K
280 lm - 90 CRI - 3000K
284 lm - 90 CRI - 3500K
249 lm - 97 CRI - 3000K
232 lm - CRIMAX - 2700K
246 lm - CRIMAX - 3000K
252 lm - CRIMAX - 3500K
260 lm - CRIMAX - 4000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

M3003 7W M3023 7W

420 lm - 80 CRI - 3000K
430 lm - 80 CRI - 3500K
443 lm - 80 CRI - 4000K
336 lm - 90 CRI - 2700K
349 lm - 90 CRI - 3000K
353 lm - 90 CRI - 3500K
311 lm - 97 CRI - 3000K
289 lm - CRIMAX - 2700K
308 lm - CRIMAX - 3000K
315 lm - CRIMAX - 3500K
324 lm - CRIMAX - 4000K

S - Spot - 19°
M - Medium - 38°
W - Wide - 55°

For dry location 

Ordering info

Model	Power (W)	Adapter	Cri/Color	Beam	Dimming	Finish
-----	--	-	----	-	-	--
M300 M302	3 (7) 5 (5)	K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K Decor Version and other on request	S Spot M Medium W Wide Other on request	A 0-10V (°) D Dali	01 white 02 black Other on request

Ordering example :**M3003 K 8030 M A 01** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit



EMA 04 MICRO


Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led track light projector with fastening system.

FEATURES

Power (W)	1x3W
Light beam (°)	Spot - Medium - Elliptical
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	Dali

M4004

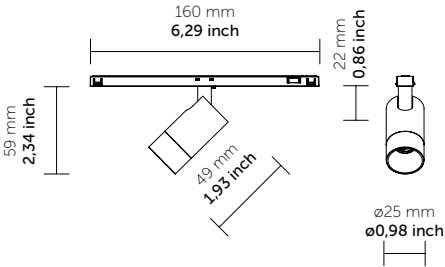

Only for track 9600 Series (rectilinear)

0° - 90° vertical tilting / 355° horizontal rotation

M4004 3W

180 lm - 80 CRI - 3000K
149 lm - 90 CRI - 3000K
190 lm - 80 CRI - 4000K
155 lm - 90 CRI - 4000K

S - Spot - 15°
M - Medium - 30°
EL - Elliptical 13° x 33 °

For dry location  pending

Ordering info

Model	Adapter	Cri/Color	Beam	Dimming	Finish
----	-	----	-		--
M4004 (1x3W)	P Serie 9600 compatible	8030 80CRI/3000K 9030 90CRI/3000K 8040 80CRI/4000K 9040 90CRI/4000K	S Spot M Medium E Elliptical Other on request	D Dali	01 white 02 black Other on request


Ordering example :**M4004 P 8030 M 01** For track info see page 226

adapter for Micro Track 9600 series, installable only in class 2 circuit



FEATURES

Total fixture Watts	6 - 12 - 18 - 24 - 30
Light beam (°)	Extra wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V dim, Dali

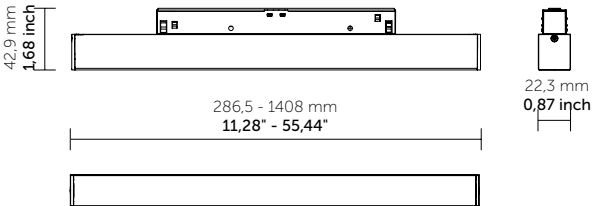

EMA LINE 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Diffused emission. Several module lengths available for single or continuous row light

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Extra wide (opal diffuser)	344 lumens/ft	368 lumens/ft

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M006 6W M012 12W M018 18W M024 24W M030 30W	11,28" 22,32" 33,24" 44,4" 55,44"	K Serie 9500 compatible (***)	9030 90CRI/3000K 9040 90CRI/4000K	O opal M micro prismatic	D dali	02 black

Ordering example: **M006K9030O002** For track info see page 226


(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 



FEATURES

Total fixture Watts	6 - 12 - 18 - 24 - 30
Light beam (°)	Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Microprismatic
Light sources	LED
Finishing	White, Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V dim, Dali

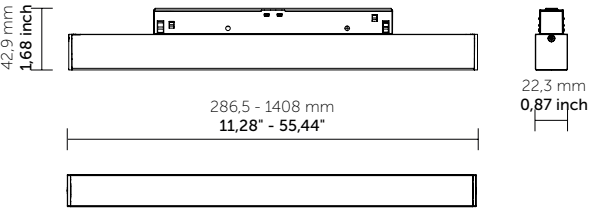

EMA LINE 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage leded light profile with fastening system.
Performance emission. Several module lengths available for single
or continuous row light

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Wide (micro prismatic diffuser)	490 lumens/ft	525 lumens/ft

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M006 6W M012 12W M018 18W M024 24W M030 30W	11,28" 22,32" 33,24" 44,4" 55,44"	K Serie 9500 compatible (***)	9030 90CRI/3000K 9040 90CRI/4000K	M micro prismatic	0 on- off A 0-10V D dali	01 white 02 black

Ordering example: **M0069030M002** For track info see page 226


(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 



FEATURES

Total fixture Watts	5.6 - 7.7 - 10.2 - 11.4 - 15.2 - 16.7 - 18.2
Light beam (°)	Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	UGR
Light sources	LED
Finishing	White, Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

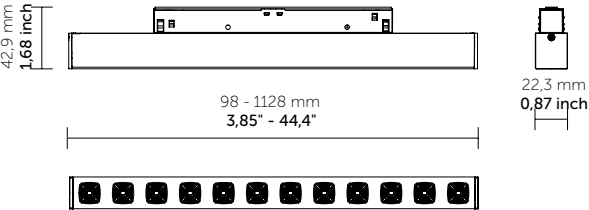

EMA LINE 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Anti-glare emission whit UGR less than 19, excellent for workplaces.
Several module lengths available for single or continuous row light.

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	UGR	419 lumens/ft	441 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
M112	UGR	620 lumens	694 lumens
M114		1007 lumens	1081 lumens
M167		1403 lumens	1506 lumens

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M056 5.6W M102 10.2W M152 15.2W M182 18.2W	11,28" 22,32" 33,24" 44,4"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 0-10V D dali	01 white 02 black

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M112 7,7W M114 11.4W M167 16.7W	3,85" 11,28" 11,28"	K Serie 9500 compatible (***)	9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 0-10V D dali	01 white 02 black

Ordering example: M0569030U002 For track info see page 226


(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 



FEATURES

Total fixture Watts	5.6 - 10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Eliptical
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Lense
Light sources	LED
Finishing	White, Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

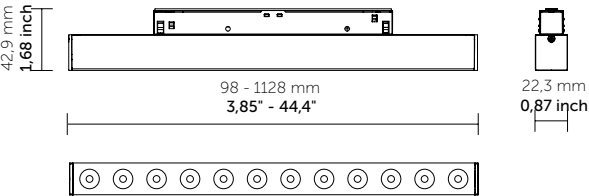

EMA LINE 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system. Three different emissions: spot, medium and elliptical. Several module lengths available for single or continuous row light.

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	Spot /Medium	453 lumens/ft	456 lumens/ft
5.6	Elliptic	422 lumens/ft	443 lumens/ft

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M056 5.6W M102 10.2W M152 15.2W M182 18.2W	11,28" 22,32" 33,24" 44,4"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	S Lens 20° M lens 30° E 26x42°	O on- off A 0-10V D dali	01 white 02 black

Ordering example: **M0569030S002** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 




EMA LINE 01 MICRO

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Diffused emission. Several module lengths available for single or continuous row light

FEATURES

Total fixture Watts	7,4 - 14,5 - 21,6
Light beam (°)	Extra wide
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - on-off, Dali

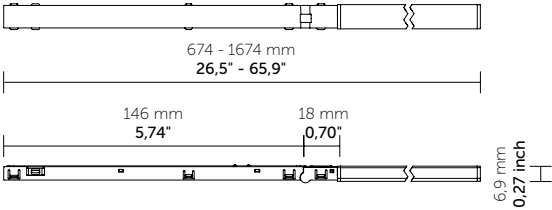

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
ME007 7,4W ME014 14,5W ME021 21,6W	26,5" 46,2" 65,9"	P Serie 9600 compatible	9030 90CRI/3000K	O opal	0 on-off D dali	02 black

Ordering example: **ME007P9030O002** For track info see page 226

For dry location 




EMA LINE 03 MICRO

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Anti-glare emission whit UGR less than 19, excellent for workplaces.
Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	8.8 - 11.2
Light beam (°)	Anti-glare (60°)
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	UGR
Light sources	LED
Finishing	White, Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

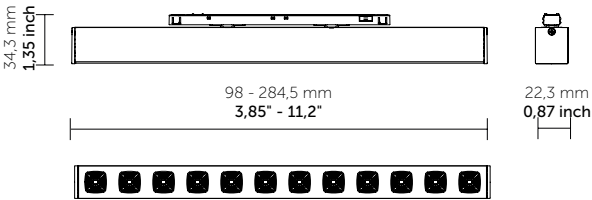

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M008 8,8W M011 11,2W	3,85" 11,22"	P Serie 9600 compatible	9030 90CRI//3000K	U UGR	0 on-off D dali	01 white 02 black

Ordering example: **M008P9030U002** For track info see page 226

For dry location 




EMA LINE 04 MICRO

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system. Three different emissions: spot, medium and elliptical. Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	5.4 - 8.8
Light beam (°)	Spot, Medium, Eliptical
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	Lense
Light sources	LED
Finishing	White, Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

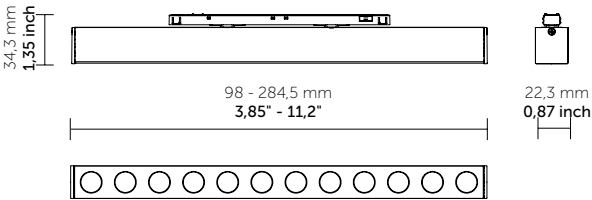

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
M005 5,4W M008 8,8W	3,85" 11,22"	P Serie 9600 compatible	9030 90CRI/3000K	S Lens 20° M lens 30° E 26x42°	O on-off D dali	01 white 02 black

Ordering example: **M008P9030S002** For track info see page 226

For dry location 




EMA LINE ADJUSTABLE 03 MICRO

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Anti-glare emission whit UGR less than 19, excellent for workplaces.
Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	8.8
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	UGR
Light sources	LED
Finishing	White, Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V dim, Dali

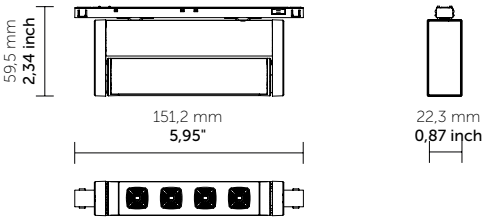

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA08 8,8W	5,95"	P Serie 9600 compatible	9030 90CRI//3000K	U UGR	0 on-off D dali	01 white 02 black

Ordering example: **MA08P9030U002** For track info see page 226

For dry location 




EMA LINE ADJUSTABLE 04 MICRO

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Anti-glare emission whit UGR less than 19, excellent for workplaces.
Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	8.8
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9600 compatible
Luminaire housing	Aluminium alloys
Protective screen	UGR
Light sources	LED
Finishing	White, Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V dim, Dali

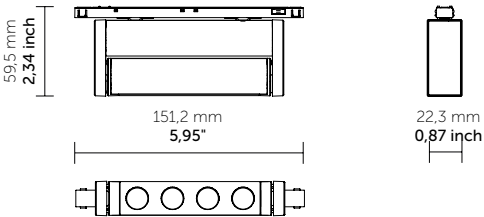

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA08 8,8W	5,95"	P Serie 9600 compatible	9030 90CRI//3000K	S Lens 20° M lens 30° E 26x42°	0 on-off D dali	01 white 02 black

Ordering example: **MA08P9030S002** For track info see page 226

For dry location 




EMA LINE ADJUSTABLE 01

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage leded light profile with fastening system.
Diffused emission. Several module lengths available for single or continuous row light

FEATURES

Total fixture Watts	6 - 12 - 18
Light beam (°)	Extra wide - Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Polycarbonate
Light sources	LED
Finishing	Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

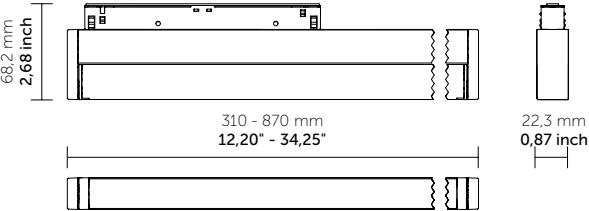

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Extra wide (opal diffuser)	344 lumens/ft	368 lumens/ft

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA006 6W MA012 12W MA018 18W	12,20" 23,22" 34,25"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K	O opal	0 on- off A 0-10V D dali	01 white 02 black

Ordering example: **MA0069030O002** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 




EMA LINE ADJUSTABLE 02

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Performance emission. Several module lengths available for single
or continuous row light. Microprismaticdiffuser.

FEATURES

Total fixture Watts	6 - 12 - 18
Light beam (°)	Wide
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Microprismatic
Light sources	LED
Finishing	Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

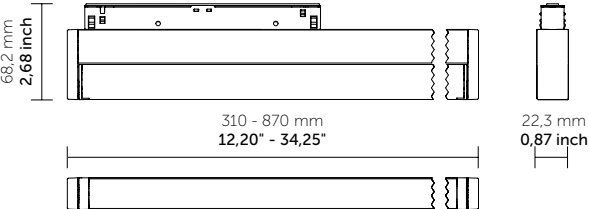

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
6	Wide (micro prismatic diffuser)	490 lumens/ft	525 lumens/ft

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA006 6W MA012 12W MA018 18W	12,20" 23,22" 34,25"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K	M micro prismatic	0 on- off A 0-10V D dali	01 white 02 black

Ordering example: **MA0069030O002** For track info see page 226


(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 



FEATURES

Total fixture Watts	5.6 -7.7-10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Anti-glare (60°)
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	UGR
Light sources	LED
Finishing	Black
Line voltage	48VDC Class2
Power supply	DC/DC led driver integrated
Dimming	0 - 10V dim, Dali

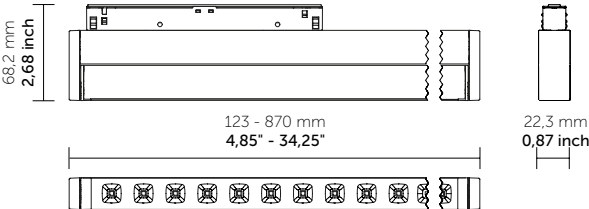

EMA LINE ADJUSTABLE 03

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Anti-glare emission whit UGR less than 19, excellent for workplaces.
Several module lengths available for single or continuous row light.

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	UGR	419 lumens/ft	441 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
MA112	UGR	620 lumens	694 lumens
MA114		1007 lumens	1081 lumens
MA167		1403 lumens	1506 lumens

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA056 5.6W MA102 10.2W MA152 15.2W	12,20" 23,22" 34,25"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 0-10V D dali	01 white 02 black

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA112 7,7W MA114 11.4W MA167 16.7W	4,85" 12,20" 12,20"	K Serie 9500 compatible (***)	9030 90CRI/3000K 9040 90CRI/4000K	U UGR	0 on- off A 0-10V D dali	01 white 02 black

Ordering example: M0569030U002 For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 




EMA LINE ADJUSTABLE 04

Design: QUATTROBI TECHNICAL DEPARTMENT

Low voltage led light profile with fastening system.
Three different emissions: spot, medium and elliptical. Several module lengths available for single or continuous row light.

FEATURES

Total fixture Watts	5.6 -7.7-10.2 - 11.4 - 16.7 - 15.2 - 18.2
Light beam (°)	Spot, Medium, Elliptical
Installation	Track Serie 9500 compatible
Luminaire housing	Aluminium alloys
Protective screen	Lense
Light sources	LED
Finishing	Black
Line voltage	48VDC
Power supply	DC/DC led driver integrated
Dimming	0 - 10V, Dali

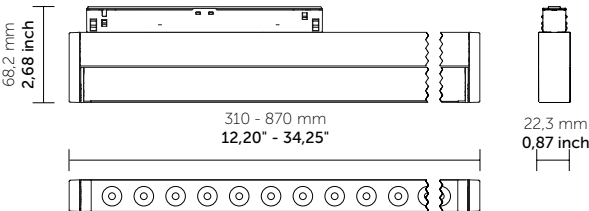

W/ft	Beam	3000 K CRI 90	4000 K CRI 90
5.6	Spot /Medium	453 lumens/ft	456 lumens/ft
5.6	Elliptic	422 lumens/ft	443 lumens/ft

Model	Beam	3000 K CRI 90	4000 K CRI 90
MA112	UGR	620 lumens	694 lumens
MA114		1007 lumens	1081 lumens
MA167		1403 lumens	1506 lumens

Ordering info

Model	Length	Adapter	Cri/Cct	Diffuser	Driver/dimmer	Finish
-----		-	----	-	-	--
MA056 5.6W MA102 10.2W MA152 15.2W	12,20" 23,22" 34,25"	K Serie 9500 compatible (***)	9530 95CRI/3000K 9540 95CRI/4000K 9030 90CRI/3000K 9040 90CRI/4000K	S Lens 20° M lens 30° E 26x42°	O on- off A 0-10V D dali	01 white 02 black

Ordering example: **M0569030S002** For track info see page 226

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

For dry location 

EMA TRACK

Low voltage track
Low voltage system Serie 9500 (*)

FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black

ST1: Surface



ST1 Curved: Surface



ST2: Suspended



ST3: Recessed



ST5: Recessed



ST6: Suspended



ST7: Suspended



ST8: Recessed



ST9: Suspended



ST10: Recessed



ST13: Recessed




ST15 Round: Surface




ST18: Recessed




ST1: Surface




ST2: Suspended

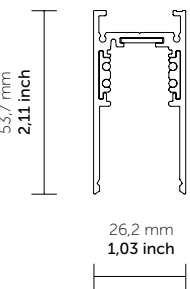


ST3: Recessed

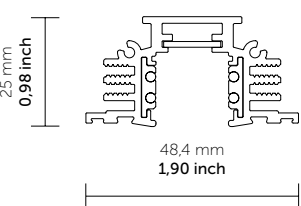


ST5: Recessed

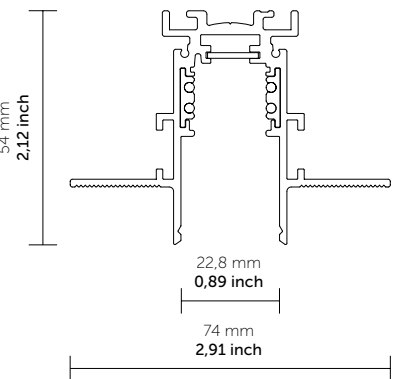


ST6: Suspended




ST7: Suspended

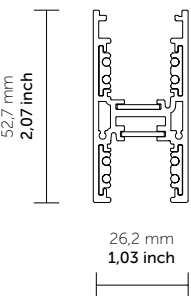


ST8: Recessed




ST9: Suspended

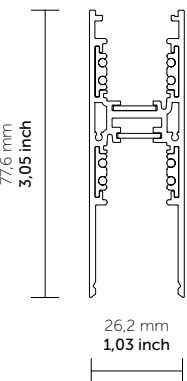


ST10: Recessed

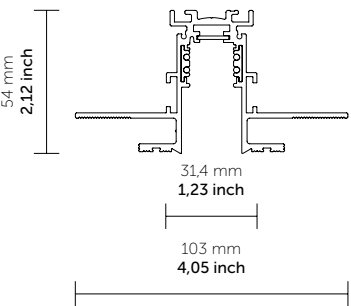


ST13: Recessed

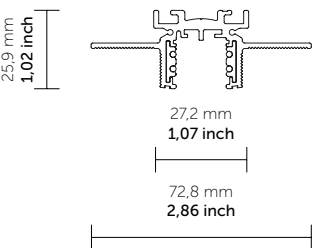

ST15 Round: Surface



ST18: Recessed

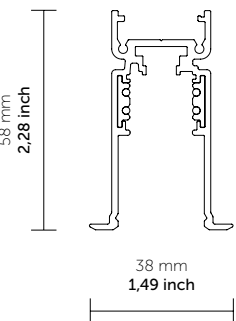

Ordering info

Model	Length	Finish	Version
-----		--	-----
A9500	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	B black W white	-ST1 -ST2 -ST3 (black color only) -ST5 (black color only) -ST6 -ST7 -ST8 -ST9 -ST13 -ST15 -ST18
	-4' / 1219,2 mm -8' / 2438,4 mm in request		

(*) Track Multisystem 9500 series








All power supplies:





- M 040 48 12 - 40 Watt
- M 080 48 12 - 80 Watt
- M 150 48 12 - 150 Watt
- M 185 48 12 - 185 Watt
- M 320 48 12 - 320 Watt

Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Accessories

For Track: **ST1 - ST2 - ST3 - ST5 - ST6 - ST7 - ST8 - ST9 - ST10 - ST13 - ST15 - ST18**
Available colours: **W** - white RAL 9010, **W2** - white RAL 9016, **B** - black RAL 9005

Painted metal body end caps	Polycarbonate body end caps	Painted metal body end caps	Polycarbonate body end caps
			
9504/ST1-...	9504/ST1-P-...	9504/ST2-...	9504/ST2-P-...
Painted metal body end cap	Template for 9500...ST5... Track	Painted metal body end caps	Polycarbonate body end caps
			
9504/ST3...	S-9500/D1-ST5	9504/ST6-...	9504/ST6-P-...
Painted metal body end cap	Painted metal body end cap	Painted metal body end cap	Template for 9500...ST10... Track
			
9504/ST7-...	9504/ST8-...	9504/ST9-...	S-9500/D1-ST10
Template for 9500...ST13... Track	Polycarbonate body end cap	Painted metal body end caps	Aesthetic track cover
			
S-9500/D1-ST13	9504/ST15-P-...	9504/ST18-...	S-9500/SE-... (L: 3m)
Opal screen	Fumè screen	Microprismatic screen TL=87%	Opal screen TL=56%
For: ST1, ST3, ST6, ST7, ST8, ST13	For: ST1, ST3, ST6, ST7, ST8, ST13	For ST2, ST6	For ST2, ST6
			
S-9500/SE-OPN-3000 (L: 3m)	S-9500/SE-F-3000 (L: 3m)	S-9500/MIC-3000 (L: 3m)	S-9500/SE-... (L: 3m)

Transparent screen TL=90%	Aesthetic track cover	Plaster installation guard	Opal screen
For ST2, ST6	For:ST2, ST5, ST9	For: ST5	For: ST1, ST3, ST6, ST7, ST8, ST13
			
S-9500/TR-3000 (L: 3m)	S-9500/LE-... (L: 3m)	S-9500-L/B-... (L: 3m)	S-9500/SE-OPN-3000 (L: 3m)
Cutting tool for track conductors			
			
S-9000/T			


Polarized connections

For Track: **ST1 - ST2 - ST3 - ST5 - ST6 - ST7 - ST8 - ST9 - ST10 - ST13 - ST15 - ST18**
Available colours: **W** - white RAL 9010, **B** - black RAL 9005

Polycarbonate body end-feed-left	Polycarbonate body end-feed-right	Polycarbonate body jointing connector	Polycarbonate body mechanical jointing connector
			
9501-S-KL/...-E	9501-S-KR/...-E	9503-S-K/...-E	9503-S/...-M-E
Polycarbonate body internal polarized L feed	Polycarbonate body external polarized L feed	Polycarbonate body polarized T-feed	Polycarbonate body polarized T-feed
			
9511-KI/...-E	9511-KE/...-E	9513-K/...-E	9514-K/...-E
Polycarbonate body polarized T-feed	Polycarbonate body polarized T-feed	Polycarbonate body polarized X-feed	Polycarbonate body adjustable corner
			
9515-K/...-E	9516-K/...-E	9517-K/...-E	9518-S-K/...-E

Track fixing accessories

For Track: **ST1 - ST2 - ST3 - ST5 - ST6 - ST7 - ST8 - ST9 - ST10 - ST13 - ST15 - ST18**
Available colours: **W** - white RAL 9010, **W2** - white RAL 9016, **B** - black RAL 9005

Complete suspension kit For: ST2, ST6, ST8	Complete suspension kit For: ST2, ST6, ST8	Suspension set For: ST2, ST6, ST7, ST9, ST15	Set for ceiling mounting with cup and terminal block
			
9500-KIT1-1,5 9500-KIT1-3 9500-KIT1-5	9500-KIT2-1,5 9500-KIT2-3 9500-KIT2-5	S-9000-P6-P-...	SET-RS/...-3
Set for ceiling mounting with cup and terminal block	Suspension set For: ST2, ST6, ST7, ST9, ST15	Set for ceiling mounting with cup and terminal block For: ST2, ST6, ST7, ST9, ST15	Suspension set For: ST2, ST6, ST7, ST8, ST9, ST15
			
SET-RS/...	S-9000-P3-...	S-9000-P5-...	S-9000-P6-S-...
Suspension set For: ST5, ST8, ST10	Ceiling clamp For: ST2, ST6	Track fast fixing clamp with gripper For: ST2, ST6, ST7, ST8, ST9	Track fast fixing clamp For: ST2, ST6, ST7, ST8, ST9
			
S-9000-P4	S-9500/114-...	S-9500/114-T-...	S-9500/115-...
Clamp with m6 gripper For: ST5, ST10, ST13	Fast fixing clamp with m6 threaded gripper For: ST5, ST10, ST13	Recessed clamp For: ST8	Recessed clamp For: ST18
			
S-9000-P2/117	S-9000/118-...	S-9500/111-...	S-9500/112-...
Short pendant bracket for suspensions For: ST1	Bracket for "in row" use junction For: ST1	Short pendant bracket for suspensions For: ST1	Bracket for "in row" use junction For: ST1
			
S-9500/312-LA-...	S-9500/322-LA-...	S-9500/312-SV-...	S-9500/322-SV-...

Track fixing accessories

For Track: **ST1 - ST2 - ST3 - ST5 - ST6 - ST7 - ST8 - ST9 - ST10 - ST13 - ST15 - ST18**
Available colours: **W** - white RAL 9010, **W2** - white RAL 9016, **B** - black RAL 9005

Short pendant bracket for suspensions For: ST2, ST6, ST8	Bracket for "in row" use junction For: ST2, ST6, ST8	Short pendant bracket for suspensions For: ST2, ST6, ST8	Bracket for "in row" use junction For: ST2, ST6, ST8
			
S-9500/313-LA	S-9500/323-LA	S-9500/313-M6	S-9500/323-M6
Short pendant bracket for suspensions For: ST2, ST6, ST8	Bracket for "in row" use junction For: ST2, ST6, ST8	Set for ceiling mounting with cup and terminal block For: ST2, ST6, ST7, ST9, ST15	Bracket for "in row" use junction For: ST2, ST6, ST8
			
S-9500/313-M13	S-9500/323-M13	S-9500/313-SV	S-9500/323-SV
Reinforcing bracket for trimless use of jointing connector For: ST3, ST5, ST7, ST9, ST10, ST15	Bracket for trimless use For: ST2	Short pendant bracket for suspensions For: ST7, ST9	Short pendant bracket for suspensions For: ST7, ST9
			
S-9500/314-...	S-9500/315	S-9500/317-LA	S-9500/317-M6
Short pendant bracket for suspensions For: ST7, ST9	Short pendant bracket for suspensions For: ST7, ST9	Short pendant bracket for suspensions with m6 gripper	Bracket with m6 gripper for "in row" use junction
			
S-9500/317-M13	S-9500/317-SV	S-9000/312-M6-...	S-9000/322-M6-...
Short pendant bracket for suspensions For: ST5	Short pendant bracket for suspensions For: ST5	Short pendant bracket for suspensions For: ST1	Bracket for "in row" use junction For: ST1
			
S-9500/314-LA-...	S-9500/314-M6-...	S-9500/312-SV-...	S-9500/322-SV-...





Track fixing accessories

For Track: **ST1 - ST2 - ST3 - ST5 - ST6 - ST7 - ST8 - ST9 - ST10 - ST13 - ST15 - ST18**
Available colours: **W** - white RAL 9010, **W2** - white RAL 9016, **B** - black RAL 9005

Plastic cup for steel cable ø 1.5 mm	Round head ceiling attachment	Ceiling bracket for suspensions	Hook with fixing hole (ø13mm) for stem
			
S-9000/3-...	S-9000/216-...	S-9000/132	S-9000/232
Steel cable	Steel cable with spherical end	Stem with m13x1 end and nut	Automatic lock
			
S-9000/211-1,5 S-9000/211-3 S-9000/211-5	S-9000/211-S-1,5 S-9000/211-S-3 S-9000/211-S-5	S-9000-1,2/604-...	S-9000/214
Screw gripper	Automatic M5 gripper with side hole	Automatic M5 gripper with side hole	Set screw for gripper on the bracket
			
S-9000/215	S-9000/218	S-9000/220	602/F
Toothed elastic washer M5a for round track			
			
S-9000/601			


Connection joinings accessories

For Track: **ST2 - ST3 - ST5 - ST6 - ST8 - ST9 - ST10 - ST18**
Available colours: **W2** - white RAL 9016, **B** - black RAL 9005

Mechanical L-joint For: ST2  S-9511/...-ST2	L Bracket for angles  S-9511/316-LA	Mechanical L-joint For: ST2  S-9511/...-P-ST2	Mechanical T-joint For: ST2  S-9513/...-P-ST2
Mechanical X-joint For ST2 track  S-9517/...-P-ST2	External vertical mechanical corner joint For: ST3  S-9511-E/...-ST3-E	Internal vertical mechanical corner joint For: ST3  S-9511-I/...-ST3-E	Horizontal mechanical corner joint For: ST3  S-9511/...-ST3-E
External vertical mechanical corner joint For: ST5  S-9511-E/...-ST5	Internal vertical mechanical corner joint For: ST5  S-9511-I/...-ST5	Horizontal mechanical corner joint For: ST5  S-9511/...-ST5	Mechanical l-joint For: ST6  S-9511/...-ST6
Mechanical L-joint For: ST6  S-9511/...-P-ST6	Mechanical T-joint For: ST6  S-9513/...-P-ST6	Mechanical X-joint For: ST6  S-9517/...-P-ST6	Mechanical L-joint For: ST8-E  S-9511/...-ST8-E
Mechanical L-joint For: ST9  S-9511/...-P-ST9	Mechanical T-joint For: ST9  S-9513/...-P-ST9	Mechanical X-joint For: ST9  S-9517/...-P-ST9	External vertical mechanical corner joint For: ST10  S-9511-E/...-ST10


Connection joinings accessories

For Track: **ST2 - ST3 - ST5 - ST6 - ST8 - ST9 - ST10 - ST18**
Available colours: **W2** - white RAL 9016, **B** - black RAL 9005


Internal vertical mechanical corner joint For: ST10  S-9511-I/...-ST10	Horizontal mechanical corner joint For: ST10  S-9511/...-ST10	Mechanical l-joint For: ST18-E  S-9511/...-P-ST2
---	--	---

EMA TRACK MICRO


Tracks




Surface
9600-.../B-ST1
9600-.../W2-ST1




Surface
9600-.../J-ST1
Painted track external white / internal black




Surface
9600-R03-90/B-ST1
9600-R03-90/W2-ST1



Surface
9600-R03-90/J-ST1
Painted track external white / internal black




Surface
9600-R05-90/B-ST1
9600-R05-90/W2-ST1




Surface
9600-R05-90/J-ST1
Painted track external white / internal black

MICRO EMA TRACK


Tracks




Surface
9600-R03-9V/B-ST1
9600-R03-9V/W-ST1




Surface
9600-R03-9V/J-ST1
Painted track external white / internal black



Recessed
9600-.../B-ST5
Trimless Track



Suspended
9600-.../B-ST6
9600-.../W2-ST6
Double Emission Track



Suspended
9600-.../B-ST15
9600-.../W2-ST15
Round Track

Accessories

For Track: **ST1** - Standard, **ST5** - Trimless, **ST6** - Double Emission, **ST15** - Round
Available colours: **W** - white RAL 9010, **W2** - white RAL 9016, **B** - black RAL 9005

Plastic end cap	Plastic end cap	Plastic end cap	Plastic end cap
			
9604/ST1-...	9604/ST5-...	9604/ST6-B	9604/ST15-B
Template for track installation	Aesthetic track cover (length: 3m)	Aesthetic track cover (length: 3m)	Opal screen
			
S-9600/D1-ST5	S-9600/...-E-3000	S-9600/...-E1-3000	S-9600/OP-3000 T _L =56%
Opal screen T _L =75% for down light led board	Transparent screen for down light led board	Led support for down light	Locking tool for PVC to be used in case of track cutting
			
S-9600/S-OP-3000	S-9600/S-TR-3000	S-9600/MP-3000	S-9600/T
End-Feed	Concealed End-Feed with Wire	Joining Connector	L Joint
			
9601-E/B 9601-E/W	9601-S/B 9601-S/W	9603/B 9603/W	9611/B 9611/W

L-Feed Ceiling-Wall	Adjustable Corner	Horizontal Mechanical Corner Joint Cover for St1 Track	Vertical Mechanical Corner Joint Cover for St1 Track
			
9612/B 9612/W	9618-S/B 9618-S/W	9605-O/B 9605-O/W	9605-V/B 9605-V/W
Plastic cup for steel cable Ø 1.5 mm	Round Head Ceiling Attachment	Ceiling Bracket for Suspensions	Short Pendant Bracket for Suspensions
			
S-9000/3-B S-9000/3-W	S-9000/216	S-9000/132	S-9600/312-LA-B S-9600/312-LA-W2
Bracket For "In Row" Use Junction	Bracket For "In Row" Use Junction	Steel Cable	Steel Cable
			
S-9600/322-LA-B S-9600/322-LA-W2	S-9600/324-B S-9600/324-W2	S-9000/211-1,5 S-9000/211-3 S-9000/211-5	S-9000/211-S-1,5 S-9000/211-S-3 S-9000/211-S-5
Automatic M3 Gripper with Side Hole	Set Screw for Gripper on the Bracket	Automatic Lock	Screw Gripper
			
S-9600/218	628/F	S-9000/214	S-9000/215




2BE

Design: Enrico Corelli

Luminaire with LED lighting system.
Wall-mounted, ceiling, high-bay installation.
Polycarbonate louver protection.

FEATURES

Power (W)	12 - 24 - 30
Installation	Suspension, ceiling, wall, track or Jbox
Luminaire housing	Aluminium
Protective screen	Polycarbonate
Finishing	Natural anodised, black anodised
Line voltage	120V 60Hz
Dimming	0 -10V dim



TB103 12W
TB107 12W

TB105 30W
TB109 30W

For dry location 

TB104 24W
TB108 24W

W/ft	3000 K CRI 80	4000 K CRI 80
5.5	650 lumens/ft	685 lumens/ft

Ordering info

Model	Color	Lenght	Finish
-----	----		--
TB103 12W120V	8030 8040	27,56"	02 black 18 grey Other on request
TB104 24W120V		51,18"	
TB105 30W120V		62.60"	

Ordering example :**TB103 8030 02**

Ordering info


Model	Adapter	Color	Lenght	Finish
-----	-	----		--
TB107 12W120V	X Global(*) XTS compatible	8030 8040	27,56"	02 black 18 grey Other on request
TB108 24W120V			51,18"	
TB109 30W120V			62.60"	

Ordering example :**TB103 X 8030 .02**

Accessories

TBA01

Bracket for ceiling/wall mounting (white-black-gray)



TBA12

n° 2 steel supporting cables with quick fix system
Length of cables 98,42" (white-black-gray)

TBA13

n° 2 steel supporting cables with quick track fix system
Length of cables 98,42" (white-black-gray)

TBA14

n° 1 steel supporting cables with quick track fix system
n° 1 steel supporting cables with quick ceiling fix system






LINE 058

Design: QUATTROBI TECHNICAL DEPARTMENT

H-profile ideal for creating thin light lines, even in the bi-emission version, with the possibility of having a good light output. The accessories allow suspension and wall installation in the bi-emission version, recessed and ceiling-mounted in the mono-emission version. The various types of covers available allow the creation of different lighting effects according to the design requirements. Wattages here below to be considered per 3 feet.

FEATURES

Power (W)	10 - 14
Lens	TR Transparent - OP Opal - OR Round Opal - OS Square Opal
Installation	Suspended, Recessed, Ceiling, Wall
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Black, Aluminum
Power supply	Remote driver
Dimming	on-off, 0-10V





For dry location 


Ordering info

Model	M/S	Length	Cri/Color	Lens	Driver/dimmer	Finish
-----	-		----	--	-	--
L5810 10W / 1m (3') L5814 14W / 1m (3')	M S	5"- 127 mm 011" - 279 mm 022" - 559 mm 094" - 2388 mm 190" - 4826 mm	8030 80CRI/3000K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9040 90CRI/4000K	TR Trasparent OP Opal OR Round Opal OS Square Opal	0 on- off A 0-10V	01 white 02 black 33 aluminum

Ordering example: **L5810 M 8030 TR 0 01**

Accessories

MATVA00258 Bracket for plasterboard	MATVA00158 Steel fixing clip	MATVA00858 Linear joint	MATVA00958 Angular joint
			
MATVA00458 Applique kit	MATVA00758 Suspension kit	MATVA00721 Wiring square rosette	
			

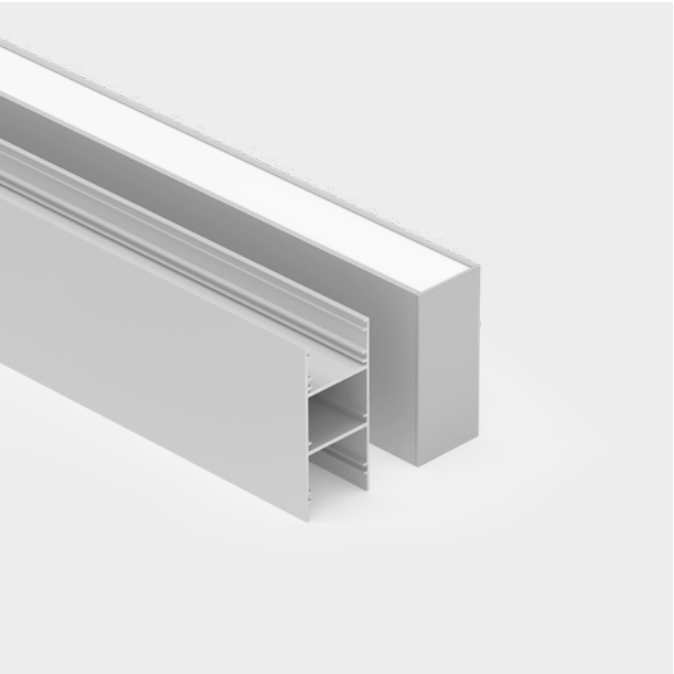


LINE 081

Design: QUATTROBI TECHNICAL DEPARTMENT

H-profile ideal for creating lines of light, also in the bi-emission version. The profile is designed to be able to use high luminous power LED sources, integrating the power supply inside. The accessories allow suspension and wall installation in the bi-emission version, recessed and ceiling-mounted in the mono-emission version. Wattages here below to be considered per 3 feet.

FEATURES

Power (W)	10 - 14
Lens	TR Transparent - OP Opal - OR Round Opal - OS Square Opal
Installation	Suspended, Recessed, Ceiling, Wall
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Black, Aluminum
Power supply	Remote driver
Dimming	on-off, 0-10V

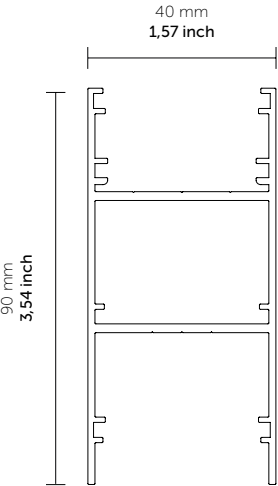




For dry location 


Ordering info

Model	M/S	Length	Cri/Color	Lens	Driver/dimmer	Finish
-----	-		----	--	-	--
L8110 10W / 1m (3') L8114 14W / 1m (3')	M S	5"- 127 mm 011" - 279 mm 022" - 559 mm 094" - 2388 mm 190" - 4826 mm	8030 80CRI/3000K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9040 90CRI/4000K	TR Trasparent OP Opal OR Round Opal OS Square Opal	0 on- off A 0-10V	01 white 02 black 33 aluminum

Ordering example: **L8110 M 8030 TR 0 01**

Accessories

MATVA00858 Linear joint	MATVA00958 Angular joint	MATVA00352 Plasterboard bracket	MATVA00252 Ceiling fixing clip
			
MATVA00452 Applique kit thickness 15 mm	MATVA00153 Formwork for masonry	MATVA00702 Suspension kit	MATVA00721 Wiring square rosette
			

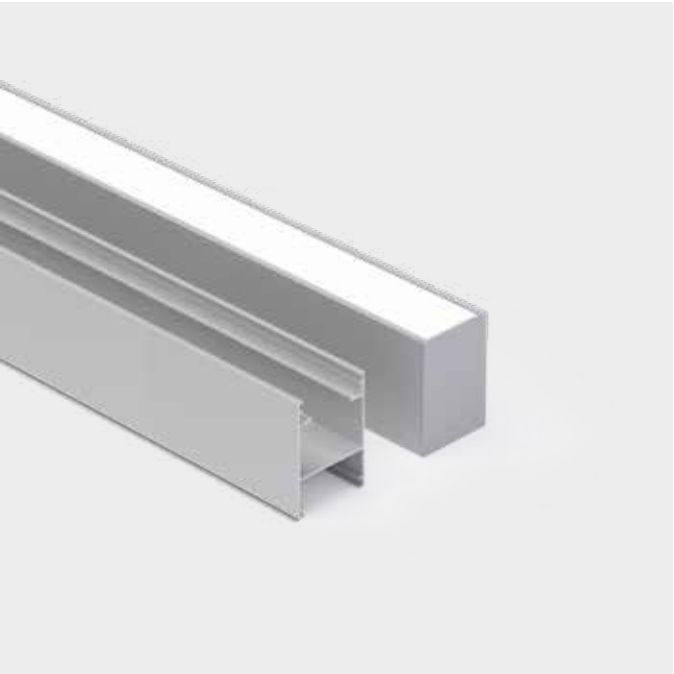


LINE 085

Design: QUATTROBI TECHNICAL DEPARTMENT

H-profile ideal for creating lines of light, also in the bi-emission version. The profile is designed to be able to use high luminous power LED sources, integrating the power supply inside. The accessories allow suspension and wall installation in the bi-emission version, recessed and ceiling-mounted in the mono-emission version.
Wattages here below to be considered per 3 feet.

FEATURES

Power (W)	10 - 14
Lens	TR Transparent - OP Opal - OR Round Opal - OS Square Opal
Installation	Suspended, Recessed, Ceiling, Wall
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Black, Aluminum
Power supply	Remote driver
Dimming	on-off, 0-10V

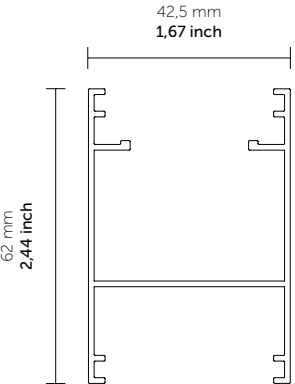



For dry location 


Ordering info

Model	M/S	Length	Cri/Color	Lens	Driver/dimmer	Finish
-----	-		----	--	-	--
L8510 10W / 1m (3') L8514 14W / 1m (3')	M S	5"- 127 mm 011" - 279 mm 022" - 559 mm 094" - 2388 mm 190" - 4826 mm	8030 80CRI/3000K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9040 90CRI/4000K	TR Trasparent OP Opal OR Round Opal OS Square Opal	0 on- off A 0-10V	01 white 02 black 33 aluminum

Ordering example: **L8510 M 8030 TR 0 01**

Accessories

MATVA00858 Linear joint	MATVA00958 Angular joint	MATVA00352 Plasterboard bracket	MATVA00252 Ceiling fixing clip
			
MATVA00452 Applique kit thickness 15 mm	MATVA00153 Formwork for masonry	MATVA00702 Suspension kit	MATVA00721 Wiring square rosette
			

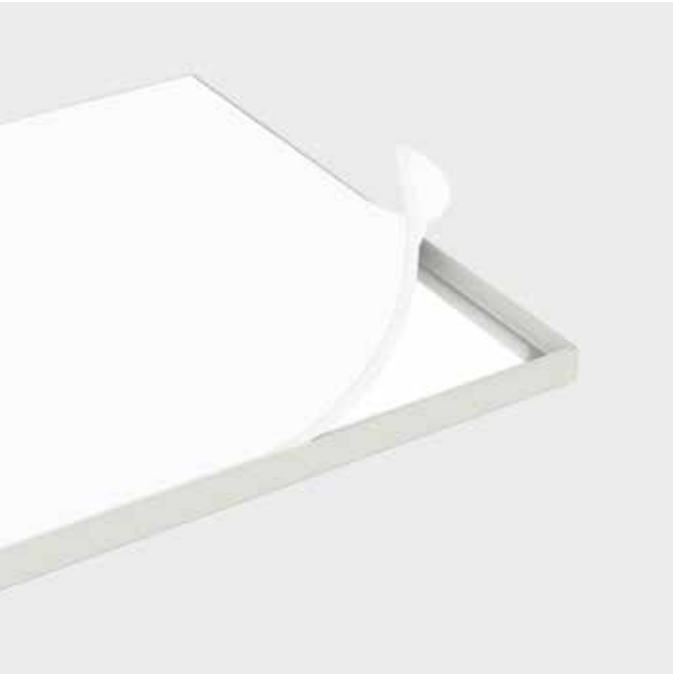

BRILLIANT BOX 035

Design: QUATTROBI TECHNICAL DEPARTMENT


Modular system with high light output

FULLY CUSTOMIZABLE UPON REQUEST


FEATURES

Power (W)	Custom
Lens	Fabric diffuser
Installation	Suspended, Ceiling, Wall
Luminaire housing	Aluminum
Light sources	LED
Finishing	White, Black, Aluminum, Custom
Power supply	Remote driver
Dimming	on-off, 0-10V, Dali 2, Casambi

Standard dimensions

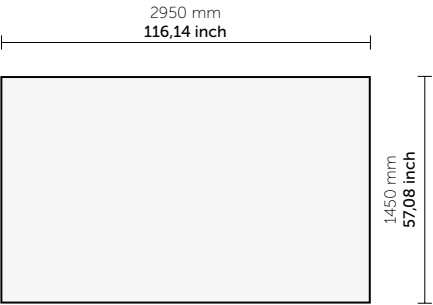

Materials

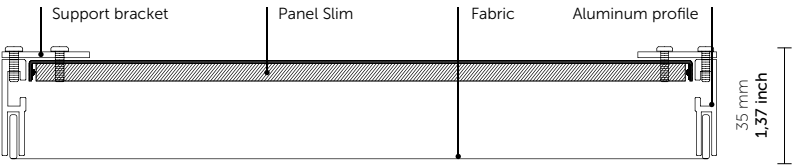

For dry location 

Ordering info


Model	Shape	Type	Cri/Color	Driver/dimmer	Finish
-----	-		----	-	--
BB035	S square R rectangular T triangle C custom	001 - 2x2' 002 - 2x4' 003 - 4x4' XXX - custom	9427 94CRI/2700K 9430 94CRI/3000K 9435 94CRI/3500K 9440 94CRI/4000K TW Tunable RGB RGB RGBW 2RGBW	0 on- off A 0-10V	01 white 02 black 33 aluminum XX custom

Ordering example: **BB035 S 9427 0 01**

Remote driver

Model	Power/ W	Output voltage	Input voltage	Type	Driver/dimmer
-----	--	--	--	-	--
BD096	96	24 - 24Vdc Constant Voltage 48 - 48Vdc Constant Voltage	U - 120-277V 60Hz 12 - 120V 60Hz	L - Isolated Low voltage 2 - Class 2	0 on- off A 0-10V A0 0-10V dim to off D2 Dali 2 C Casambi

Ordering example: **BD096 96 24 U L D2**

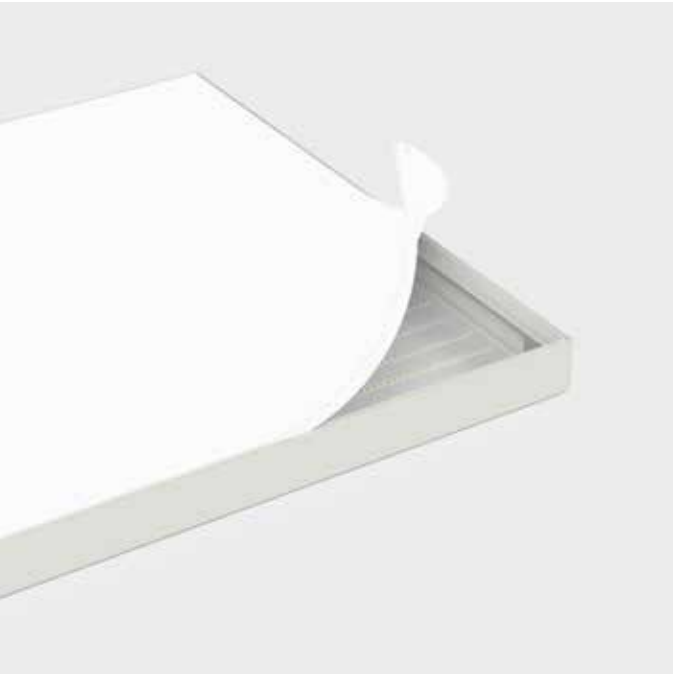

BRILLIANT BOX 055

Design: QUATTROBI TECHNICAL DEPARTMENT


Modular system with high light output

FULLY CUSTOMIZABLE UPON REQUEST


FEATURES

Power (W)	Custom
Lens	Fabric diffuser
Installation	Suspended, Ceiling, Wall
Luminaire housing	Aluminum
Light sources	LED
Finishing	White, Black, Aluminum, Custom
Power supply	Remote driver
Dimming	on-off, 0-10V, Dali 2, Casambi

Standard dimensions

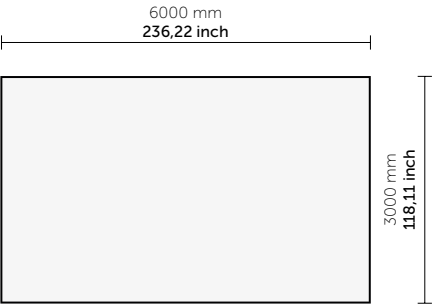

Materials

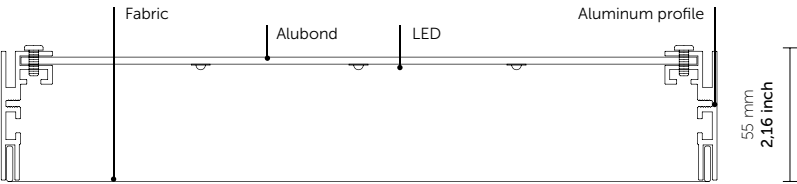

For dry location 

Ordering info


Model	Shape	Type	Cri/Color	Driver/dimmer	Finish
-----	-		----	-	--
BB055	S square R rectangular T triangle C custom	001 - 2x2' 002 - 2x4' 003 - 4x4' XXX - custom	9427 94CRI/2700K 9430 94CRI/3000K 9435 94CRI/3500K 9440 94CRI/4000K TW Tunable RGB RGB RGBW 2RGBW	0 on- off A 0-10V	01 white 02 black 33 aluminum XX custom

Ordering example: **BB055 S 9427 0 01**

Remote driver

Model	Power/ W	Output voltage	Input voltage	Type	Driver/dimmer
-----	--	--	--	-	--
BD096	96	24 - 24Vdc Constant Voltage 48 - 48Vdc Constant Voltage	U - 120-277V 60Hz 12 - 120V 60Hz	L - Isolated Low voltage 2 - Class 2	0 on- off A 0-10V A0 0-10V dim to off D2 Dali 2 C Casambi

Ordering example: **BD096 96 24 U L D2**

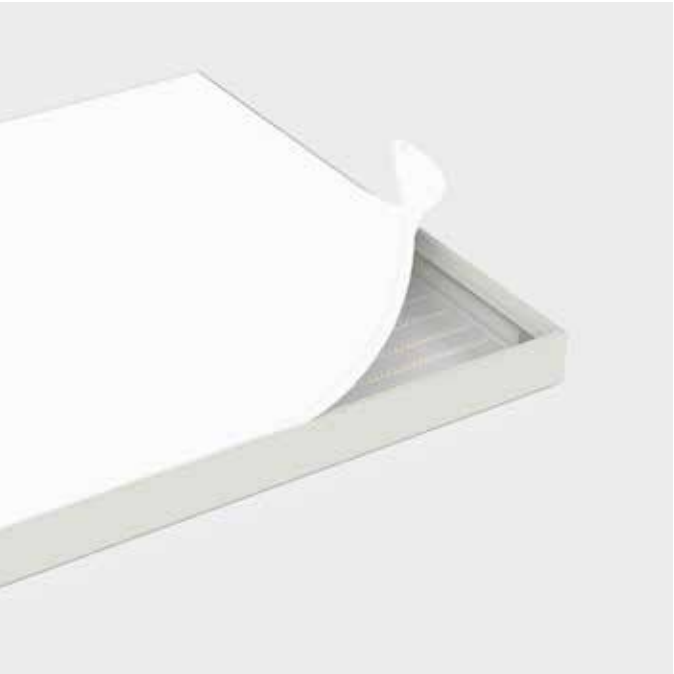

BRILLIANT BOX 100

Design: QUATTROBI TECHNICAL DEPARTMENT

Modular system with high light output

FULLY CUSTOMIZABLE UPON REQUEST

FEATURES

- Power (W)

Lens

Installation

Luminaire housing

Light sources

Finishing

Power supply

Dimming
- Custom

Fabric diffuser

Suspended, Ceiling, Wall

Aluminum


LED

White, Black, Aluminum, Custom


Remote driver

on-off, 0-10V, Dali 2, Casambi

Standard dimensions

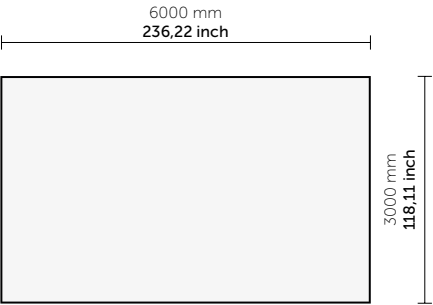

Materials

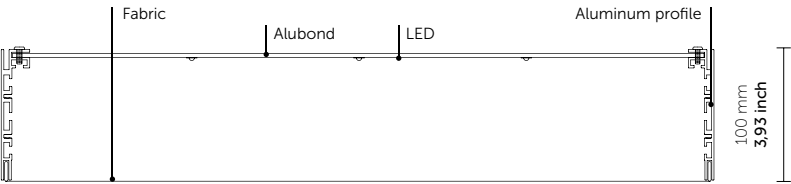

For dry location 

Ordering info

Model	Shape	Type	Cri/Color	Driver/dimmer	Finish
-----	-		----	-	--
BB100	S square R rectangular T triangle C custom	001 - 2x2' 002 - 2x4' 003 - 4x4' XXX - custom	9427 94CRI/2700K 9430 94CRI/3000K 9435 94CRI/3500K 9440 94CRI/4000K TW Tunable RGB RGB RGBW 2RGBW	0 on- off A 0-10V	01 white 02 black 33 aluminum XX custom

Ordering example: **BB100 S 9427 0 01**

Remote driver

Model	Power/ W	Output voltage	Input voltage	Type	Driver/dimmer
-----	--	--	--	-	--
BD096	96	24 - 24Vdc Constant Voltage 48 - 48Vdc Constant Voltage	U - 120-277V 60Hz 12 - 120V 60Hz	L - Isolated Low voltage 2 - Class 2	0 on- off A 0-10V A0 0-10V dim to off D2 Dali 2 C Casambi

Ordering example: **BD096 96 24 U L D2**



BRILLIANT BOX PROFILE 0XL

Design: QUATTROBI TECHNICAL DEPARTMENT

Modular system with high light output

FOR CUSTOM PROJECTS

FEATURES

- Power (W)

Lens

Installation

Luminaire housing

Light sources

Finishing

Power supply

Dimming
- Custom

Fabric diffuser

Suspended, Ceiling, Wall

Aluminum


LED

White, Black, Aluminum, Custom

Remote driver

on-off, 0-10V, Dali 2, Casambi



Maximum custom dimensions

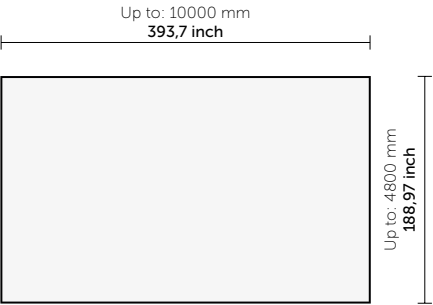

For dry location 

Materials

Pvc profile - fabric -alubond

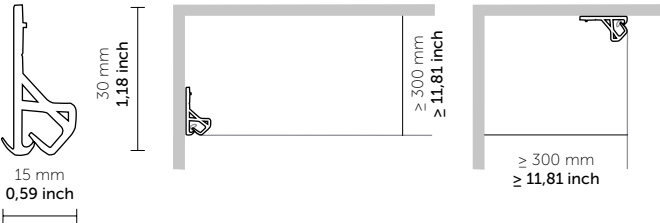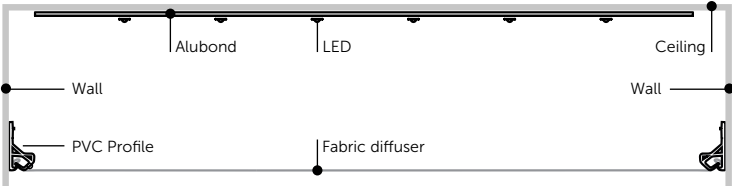

Ordering info

Model	Shape	Type	Cri/Color	Driver/dimmer	Finish
-----	-		----	-	--
BB0XL	S square R rectangular T triangle C custom	001 - 2x2' 002 - 2x4' 003 - 4x4' XXX - custom	9427 94CRI/2700K 9430 94CRI/3000K 9435 94CRI/3500K 9440 94CRI/4000K TW Tunable RGB RGB RGBW 2RGBW	0 on- off A 0-10V	01 white 02 black 33 aluminum XX custom

Ordering example: BB0XL S 9427 0 01

Remote driver

Model	Power/ W	Output voltage	Input voltage	Type	Driver/dimmer
-----	--	--	--	-	--
BD096	96	24 - 24Vdc Constant Voltage 48 - 48Vdc Constant Voltage	U - 120-277V 60Hz 12 - 120V 60Hz	L - Isolated Low voltage 2 - Class 2	0 on- off A 0-10V A0 0-10V dim to off D2 Dali 2 C Casambi

Ordering example: BD096 96 24 U L D2



LINEA DI LUCE

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Ceiling, higt-bay installation.


Optical assembly set back from the edge of the luminaire.

With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

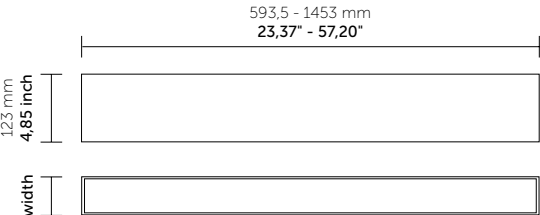

For dry location 

W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM051 20W120V-277V LM052 30W120V-277V LM053 40W120V-277V LM054 50W120V-277V	23,37" 34,65" 45,90" 57,20"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM051 280 8030 SL.01**

Accessories

LM350

N. 2 steel supporting cables with quick fix system
length of cables: 98,42 inch

LM351

N. 2 ceiling mounting brackets



LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Ceiling, high-bay installation.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

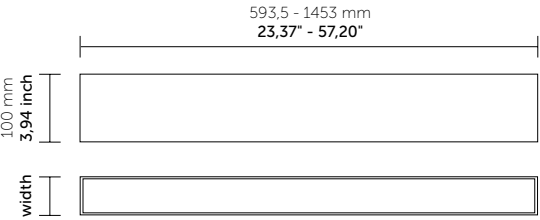

For dry location 

W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM061 20W120V-277V LM062 30W120V-277V LM063 40W120V-277V LM064 50W120V-277V	23,37" 34,65" 45,90" 57,20"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request


Ordering example: LM061 280 8030 SL.01

Accessories

LM350
N. 2 steel supporting cables with quick fix system
length of cables: 98,42 inch

LM351
N. 2 ceiling mounting brackets



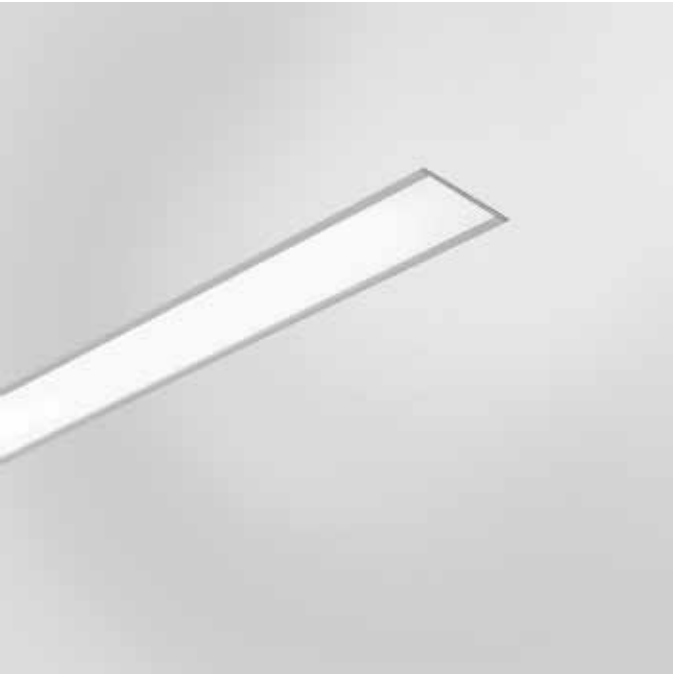

LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Recessed installation.
Outer edge with profile.
Front louver flush the luminaire.
Bracket for plasterboard mounting.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

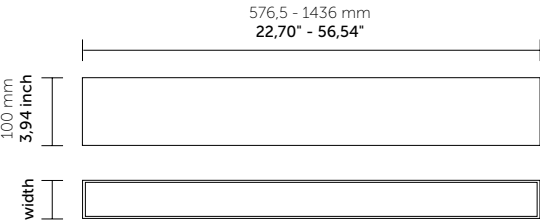

For dry location 

Ceiling Cut-out




W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM071 20W120V-277V LM072 30W120V-277V LM073 40W120V-277V LM074 50W120V-277V	22,70" 33,98" 45,26" 56,54"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

Ordering example: LM071 339 8030 SL.01

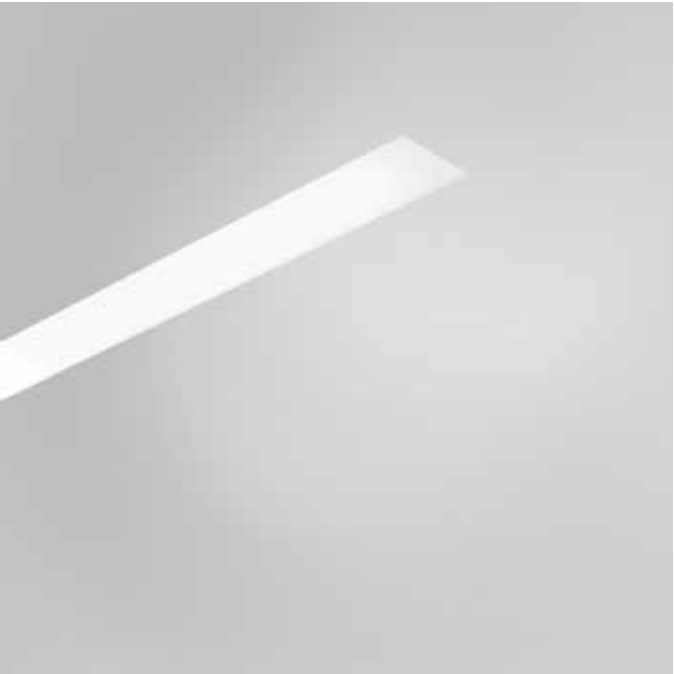

LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Recessed installation.
Without the outer edge.
Front louver flush the luminaire.
Bracket for plasterboard mounting.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Suspended / Surface
Luminaire housing	Recessed
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

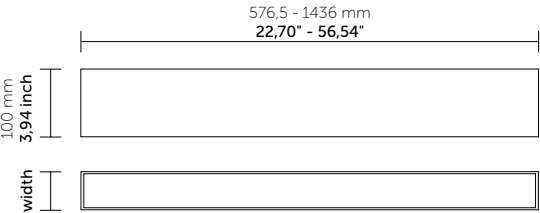

For dry location 

Ceiling Cut-out




W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM081 20W120V-277V LM082 30W120V-277V LM083 40W120V-277V LM084 50W120V-277V	22,70" 33,98" 45,26" 56,54"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM081 280 8030 SL.01**

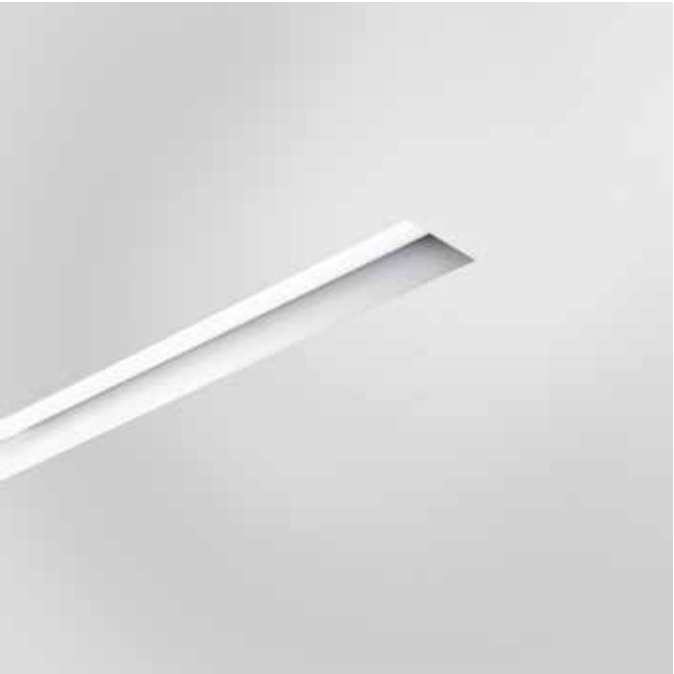

LINEA DI LUCE


Design: QUATTROBI TECHNICAL DEPARTMENT

- Luminaire with LED lighting system.
- Recessed installation.
- Without the outer edge.
- Optical assembly set back from the edge of the luminaire.
- Bracket for plasterboard mounting.
- With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

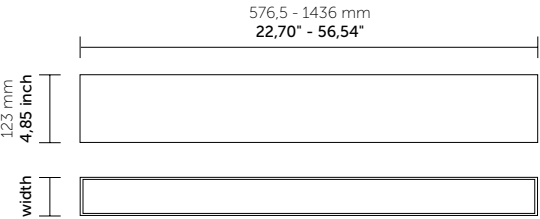

For dry location 

Ceiling Cut-out



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM091 20W120V-277V LM092 30W120V-277V LM093 40W120V-277V LM094 50W120V-277V	22,70" 33,98" 45,26" 56,54"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: LM091 280 8030 SL.01





LINEA DI LUCE suspended system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Ceiling, high-bay installation.
Optical assembly set back from the edge of the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminumLight sources LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

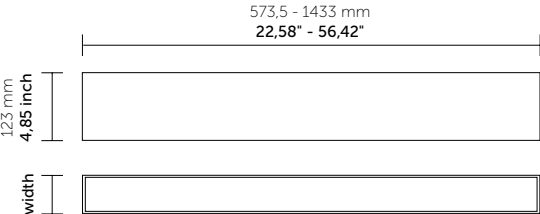

For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

L1 Beginning module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM101 20W120V-277V LM102 30W120V-277V LM103 40W120V-277V LM104 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM161 20W120V-277V LM162 30W120V-277V LM163 40W120V-277V LM164 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM101 280 8030 SL.01**

Accessories

LM350
N. 2 steel supporting cables with jack and ceiling rose.

LM351
N. 1 kit (contains two supports)

LM353
Mechanical Connection

LM356
N°1 Still supporting cable

LM358
N°2 Side cap for line (0,394 inch)



LINEA DI LUCE suspended system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Ceiling, high-bay installation.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Suspended / Surface
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

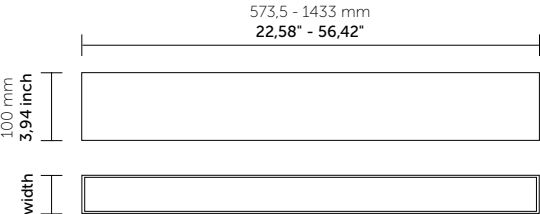

For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM121 20W120V-277V LM122 30W120V-277V LM123 40W120V-277V LM124 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module

Model	Length	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM171 20W120V-277V LM172 30W120V-277V LM173 40W120V-277V LM174 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM121 280 8030 SL.01**

Accessories


LM350
N. 2 steel supporting cables with jack and ceiling rose.

LM351
N. 1 kit (contains two supports)

LM353
Mechanical Connection

LM356
N°1 Still supporting cable

LM357
N°2 Side cap for line (0,394 inch)

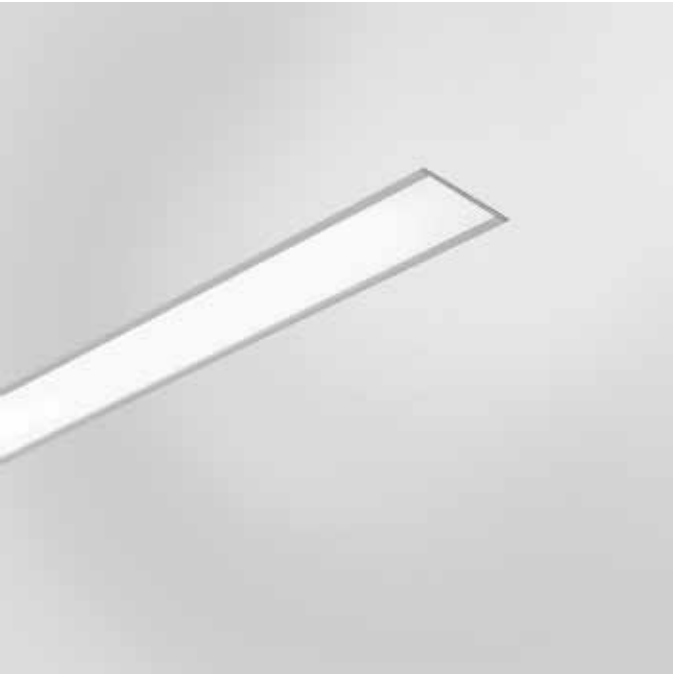

LINEA DI LUCE recessed system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Outer edge with profile.
Front louver flush the luminaire.
Bracket for plasterboard mounting.
With electronic ballast.


FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens - BL Polycarbonate Biasimetric lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

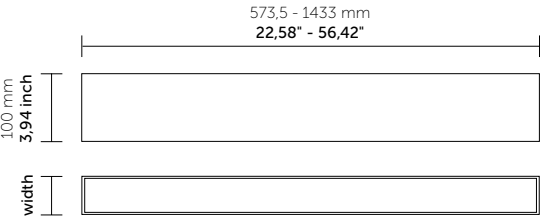

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM131 20W120V-277V LM132 30W120V-277V LM133 40W120V-277V LM134 50W120V-277V	22,58" 33,86" 45,14" 56,42"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM181 20W120V-277V LM182 30W120V-277V LM183 40W120V-277V LM184 50W120V-277V	22,58" 33,86" 45,14" 56,42"	339 3,39" 618 6,18" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens * ONLY 3,39" Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM131 339 8030 SL.01**

Accessories

LM353
Mechanical connection

LM354
N°2 Side cap for line (0,079 inch)

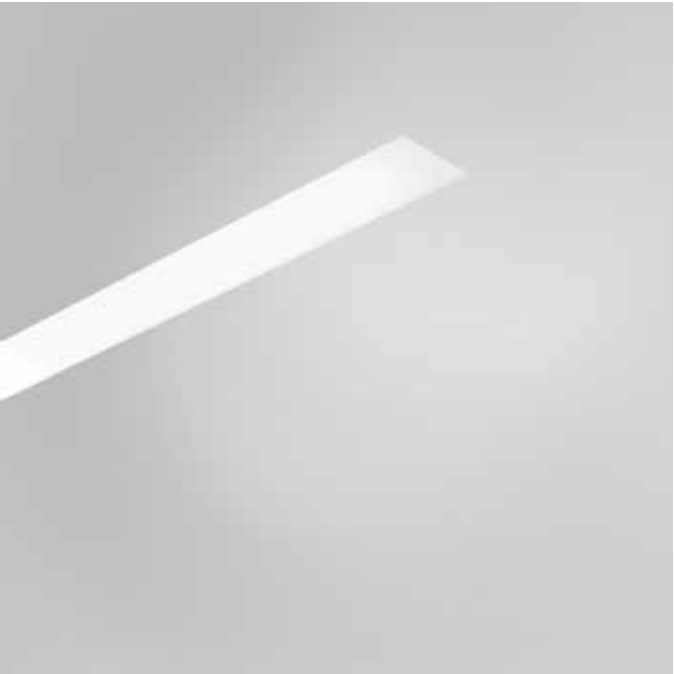

LINEA DI LUCE recessed system


Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Without the outer edge.
Front louver flush the luminaire.
With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

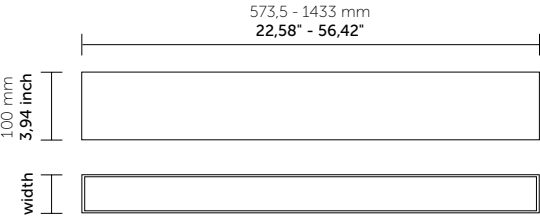

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft
	BL Biasimetric lens	1190 lumens/ft	1280 lumens/ft	1310 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM141 20W120V-277V LM142 30W120V-277V LM143 40W120V-277V LM144 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM191 20W120V-277V LM192 30W120V-277V LM193 40W120V-277V LM194 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens *BL Biasimetric lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM141 280 8030 SL.01**

Accessories

LM353
Mechanical connection

LM355
N°2 Side cap for line (0,079 inch)

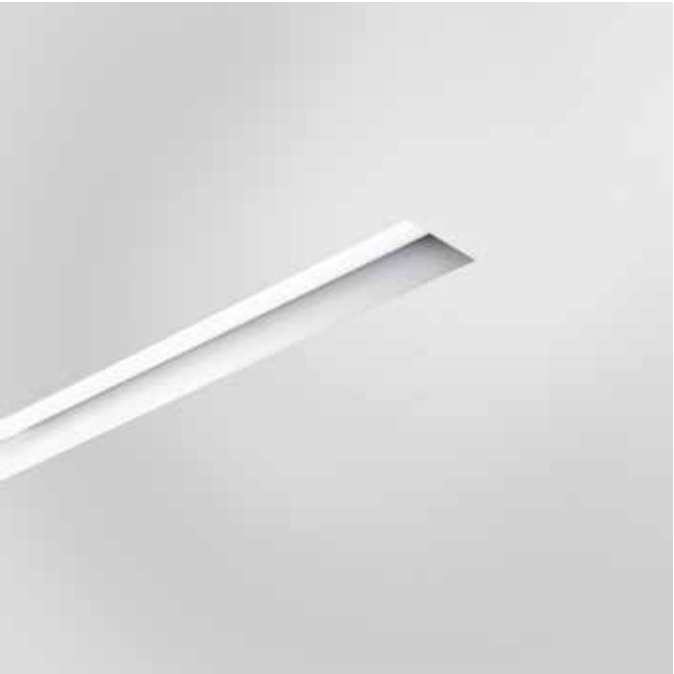

LINEA DI LUCE

trimless recessed system

Design: QUATTROBI TECHNICAL DEPARTMENT

Luminaire with LED lighting system.

Modular systems.

Recessed installation.

Without the outer edge.


Optical assembly set back from the edge of the luminaire.

With electronic ballast.

FEATURES

Power (W)	20 - 30 - 40 - 50
Lens	SL Polycarbonate satin lens - PL Polycarbonate prismatic lens
Installation	Trimless recessed
Luminaire housing	Extruded aluminum
Light sources	LED
Finishing	White, Grey, Black, Custom powder coat
Power supply	Electronic constant current LED driver, 120V - 277V 50-60Hz
Dimming	0- 10 V dimming 1%

Emergency circuit via remote inverter or auxiliary emergency power supply (not included) on request

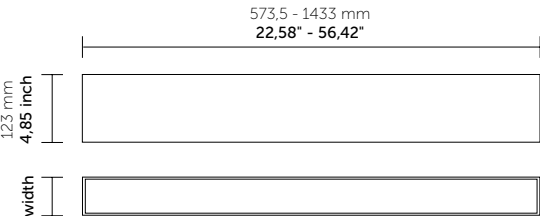

Ceiling Cut-out



For dry location 

Configuration: Beginning of run **L1** module, middle or end run **L2** module



W/ft	Lens	3000 K CRI 80	4000 K CRI 80	5000 K CRI 80
10	SL Satin lens	729 lumens/ft	773 lumens/ft	788 lumens/ft
	PL Prismatic lens	878 lumens/ft	930 lumens/ft	950 lumens/ft

Ordering info

L1 Beginning module

Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM151 20W120V-277V LM152 30W120V-277V LM153 40W120V-277V LM154 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

L2 Middle or end module


Model	Length A	Width	Cri/Color	Lens	Finish
-----		---	----	--	--
LM201 20W120V-277V LM202 30W120V-277V LM203 40W120V-277V LM204 50W120V-277V	22,58" 33,86" 45,14" 56,42"	280 2,80" Other on request	8030 80CRI/3000K 8040 80CRI/4000K 8050 80CRI/5000K Other on request	SL Satin lens *PL Prismatic lens Other on request	01 white 02 black 18 grey Other on request

Ordering example: **LM151 280 8030 SL.01**

Accessories

LM353
Mechanical connection

LM352
N°2 Side cap for line (0,079 inch)

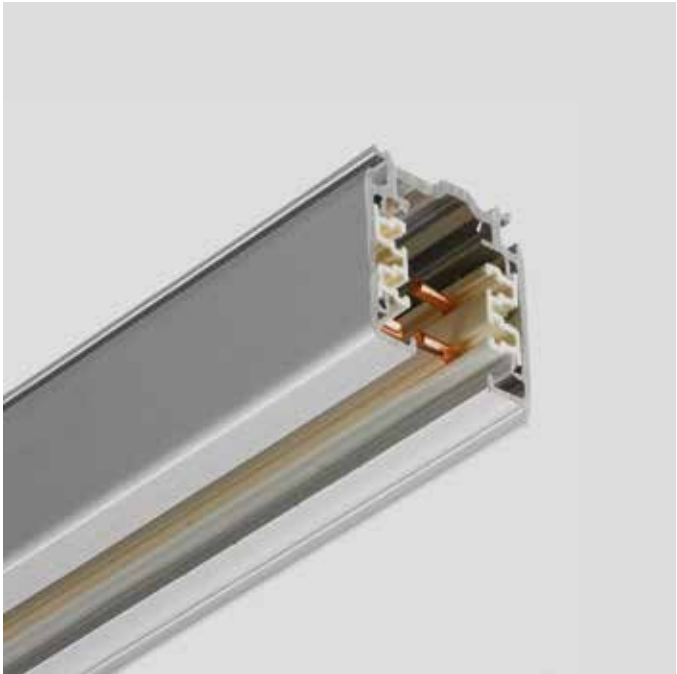

TRACK


20 Amps 120V 2 circuit / 2 neutral

Design: GLOBAL


Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



TEK: Suspended/ Surface

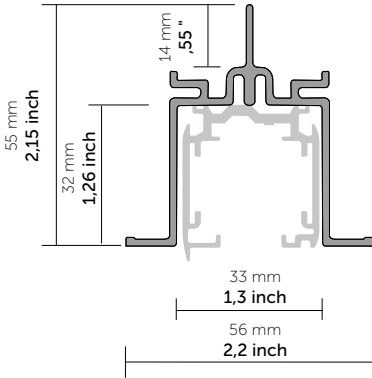

FTP: recessed

For dry location

Ordering info


Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
TEK44 TEK48 TEK412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: suspended / surface **TEK44 1**

Ordering example: recessed **TEK44 1 + FTP44 2**




Accessory wiring diagram

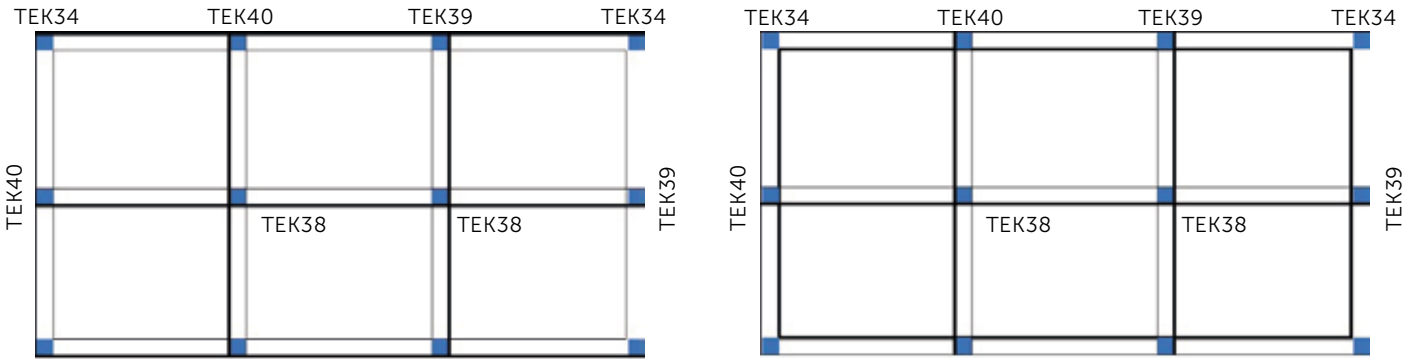

Components

Model	Finish	Additional Accessories
-----	--	
TEK11 live end feed TEK21 linear coupler TEK 14 live middle feed TEK34 feedable L-connector adjustable polarity TEK 39 feedable T-connector adjustable right polarity TEK 40 feedable T-connector adjustable left polarity TEK38 feedable X-connector TEK41 dead ends TEK24 adjustable connector	2 black 3 white	GES15 outlet box cover TEK41 recessed end cup SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet XTSV12-1 bending tool

Ordering example: **XTS11 2**

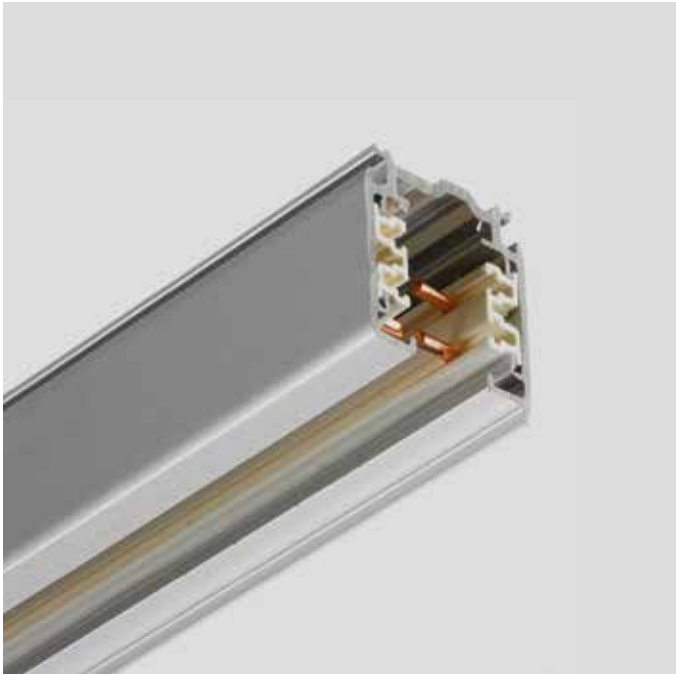


TRACK 3 circuit 120V

Design: GLOBAL

Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

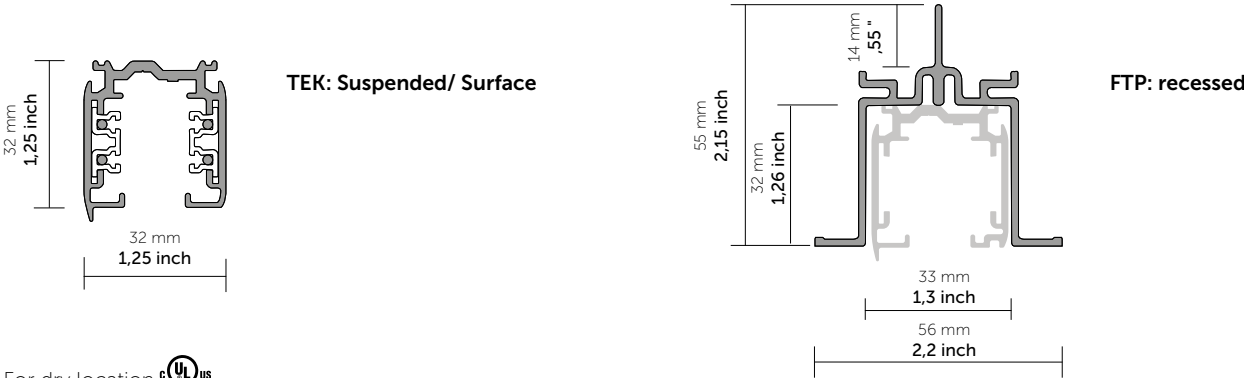

For dry location

Ordering info


Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44 XTS48 XTS412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**



Accessory wiring diagram

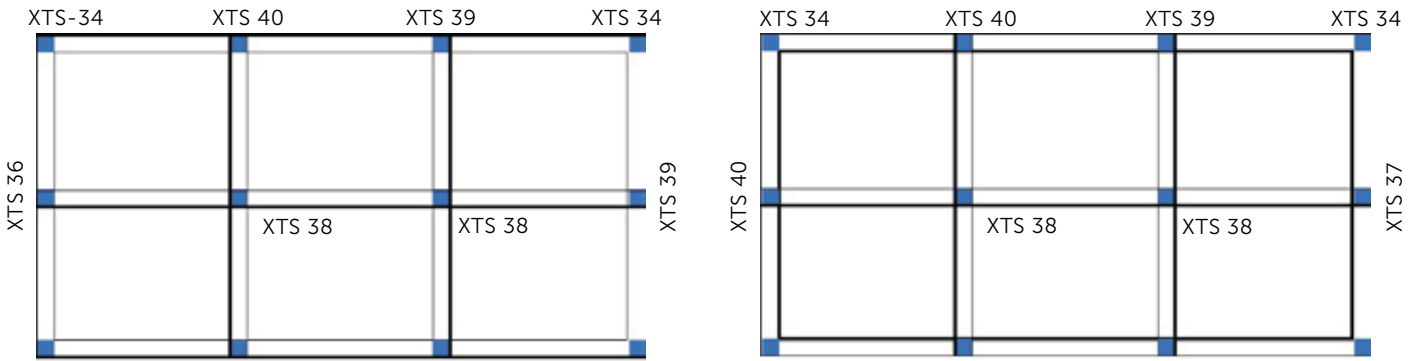

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**




TRACK 1 circuit 120V

Design: GLOBAL

Luminaire with LED lighting system.
Modular systems.
Recessed installation.
Without the outer edge.
Optical assembly set back from the edge of the luminaire.
With electronic ballast.

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



GES: Suspended/ Surface

For dry location 


Ordering info

Model	Length	Finish
-----		--
GES204 GES208 GES212	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: **GES204 1**




Accessory wiring diagram

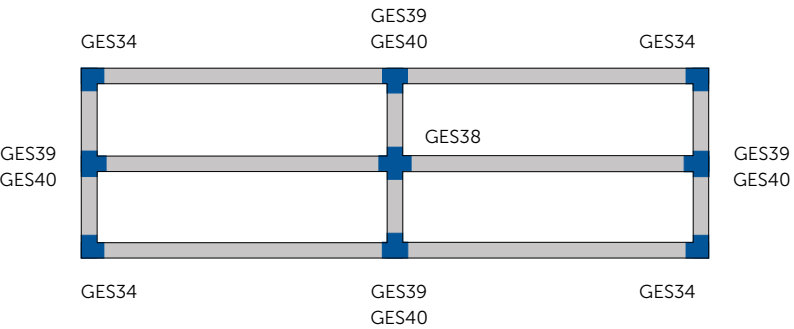

Components

Model	Finish	Additional Accessories
-----	--	
GES11 end feed left GES14 center feed GES15 outled box cover GES17 t-bar feed kit GES21 straight connector GES23 straight connector GES34 L connector adjustable GES38 X connector GES40 T connector adjustable GES41 dead end GES67 floating feed GES70 monopoint Canopy GEA10 universal stem suspension point GEA11 end feed stem suspension point GEA3712 12" steam kit includeas steam and Canopy GEA3718 18" steam kit includeas steam and Canopy GEA3724 24" steam kit includeas steam and Canopy GEA3748 48" steam kit includeas steam and Canopy	1 aluminium 2 black 3 white GEA COD. Only -2=black -3 =white	GEA21 track reinforcement plate GEA6 thread rod mounting clip GEA7 t-bar mounting clip

Ordering example: **GES11 2**

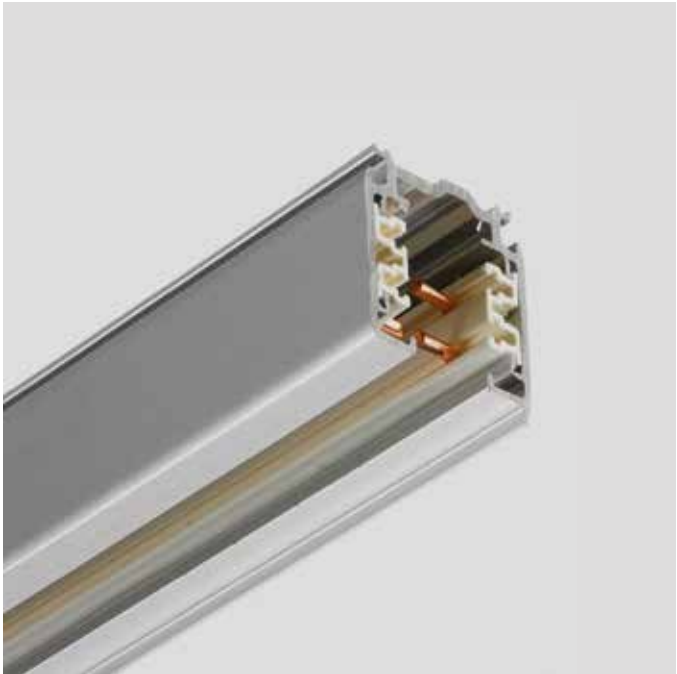


TRACK 3 circuit 120V

Design: STUCCHI


Lighting track system
Low profile , modular system
High power handling capability

FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



A9000ST : Suspended/ Surface

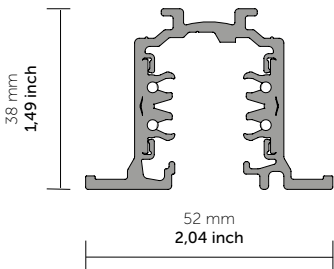

A9000R: Recessed

For dry location 

Ordering info


Model	Length	Finish	Version
-----		--	
A9000-UL4 A9000-UL8 A9000-UL12	4'(48") 8(96") 12'(144")	G aluminium B black W white	ST-120 R-120

Ordering example: suspended / surface **A9000-UL4/B-ST-120**
Ordering example: recessed **A9000-UL4/B-R-120**



A719/3 A719/3/B

Accessory wiring diagram

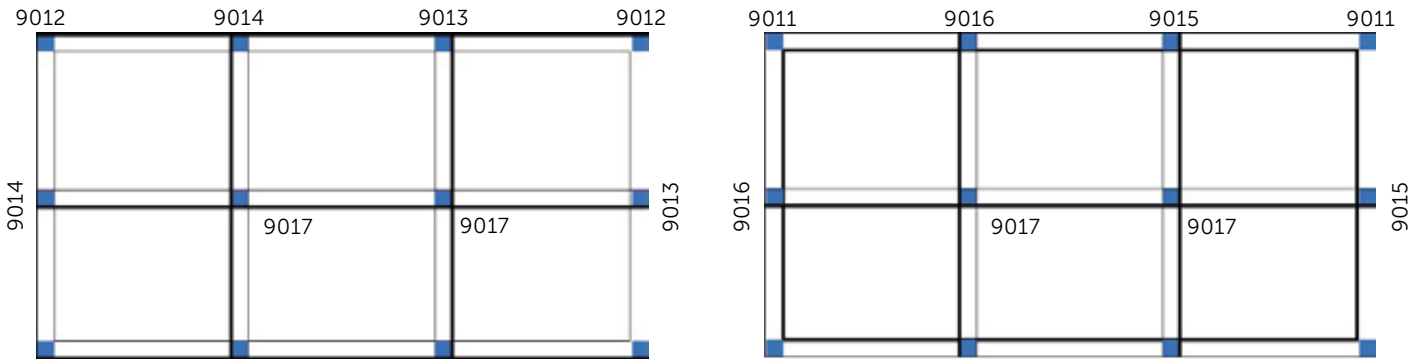

Components

Model	Finish	Additional Accessories	Finish
-----	--		
A9001 end feed A9002 end feed A9010 center feed A9003 straight connector A9011-A9012 L connector A9017 X connector A9015-9016 T connector inside A9014-9013 T connector outside A9004-9004R dead end	G aluminium B black W white	S9000/T bending tool S9001-R/6 cover recessed track S9010-R/6 cover recessed track S9011-R/6 cover recessed track S9013-R/6 cover recessed track S9016-R/6 cover recessed track S9017-R/6 cover recessed track	G aluminium B black W white

Ordering example: **A9001/B-3C**

AX60	32
AX76	36
AX95	38
KOR	42
MISSING	62
INNER	68
MAX	74
MINI MAX	76
PHOTO	80
SAM 95	86
SPINNER	90
SUNLIGHT	94
ENRI	142
SMOKE	150
POP 60	164
PENNA	168
MEDUSA	174
INK	176
MINI INK	178
EMA	180
EMA LINE	200
EMA TRACK	226
²BE	240
LINE	244
BRILLIANT BOX	250
LINEA DI LUCE	258
TRACK	282

P: 347 613 5772

