

Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>



EMA 03


Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

Listings: US LISTED




M3003

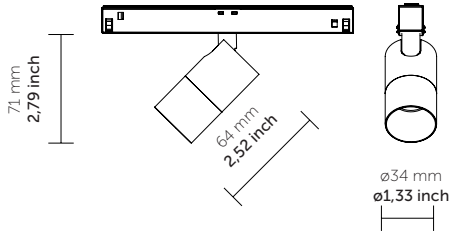

Track type - ST1, ST3, ST6, ST8

M3023

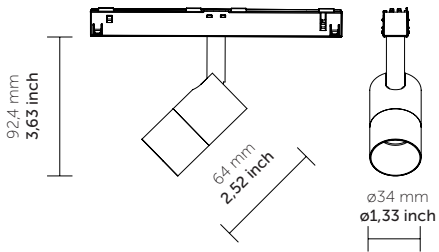

Track type - ST2, ST5, ST10, ST14

PRODUCT FEATURES

Type:	Track
Applications:	Indoor
Luminaire material:	Aluminium alloys
Protective screen:	Polycarbonate
Light source:	LED
Power Supply:	DC/DC led driver integrated
Wattage:	7
Delivered lumens:	610 lm max
Color Temp:	3000K, 3500K
CRI:	80+
Dimming:	0/1-10V dim

Specification recap

Type	Item #	Quantity

*Please make sure to include fixture and any accessories.

Ordering info

Model	Adapter	Cri/Color	Beam	Dimming	Finish
-----	-	----	-		--
M3003 (1x7W) M3023 (1x7W) M3033 (1x7W)	P Serie 9600 compatible (*) K Serie 9500 compatible (***)	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 8030 90CRI/3000K	S Spot M Medium W Wide E Elliptical Other on request	1. On/off A 0-10V (*) D Dali	01 white 02 black Other on request

Ordering example : **M3003 P 8030 M 01**

(*) adapter for Micro Track 9600 series, installable only in class 2 circuit

(***) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

Long arm version for St2, St5, St10, St14 Multisystem Evo 9500 track, on request

(°) not available for P version Serie Micro 9600

EMA 03

Design: QUATTROBI TECHNICAL DEPARTMENT




Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	7W
Factor	1.0

Photometry


8030 S 7W 3000K CRI80 22°
Lumens: 590

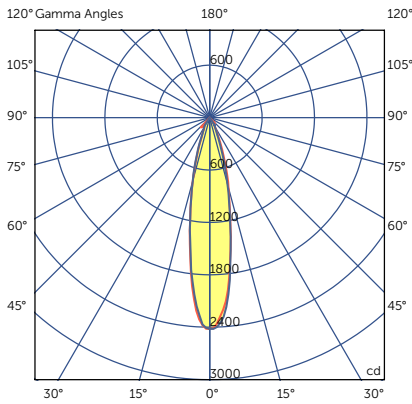

Candelas at Nadir

Deg	Candela
0	2417.92
5	2111.49
15	832.29
25	210.08
35	82.96
45	0.00


8030 M 7W 3000K CRI80 37°
Lumens: 590

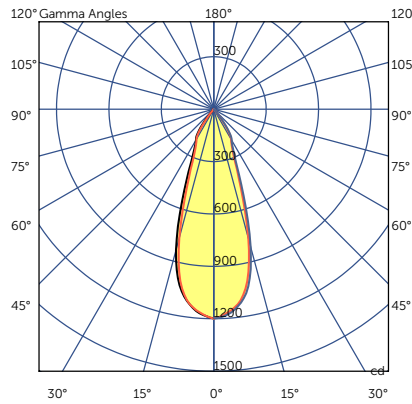

Candelas at Nadir

Deg	Candela
0	1198.88
5	1154.63
15	762.87
25	250.34
35	120.54
45	2.75

8030 EL 7W 3000K CRI80 42° x 19°
Lumens: 590

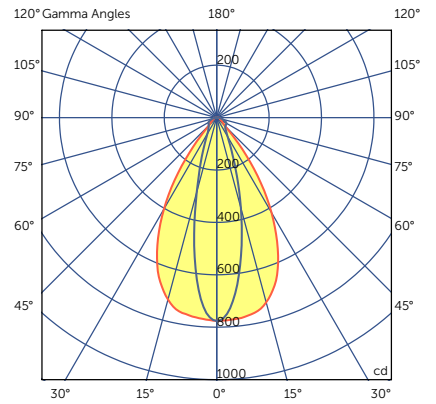

Candelas at Nadir

Deg	Candela
0	775.26
5	772.31
15	729.24
25	551.24
35	256.94
45	45.26

Date		Type	
Specifier		Project Name	



EMA TRACK

Led track light projector with magnetic fastening system.


PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black


Listings: US LISTED




ST1




ST2



ST3

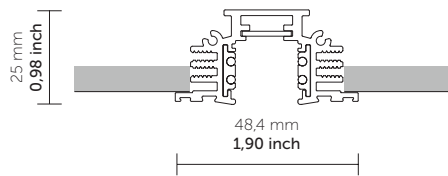

ST5

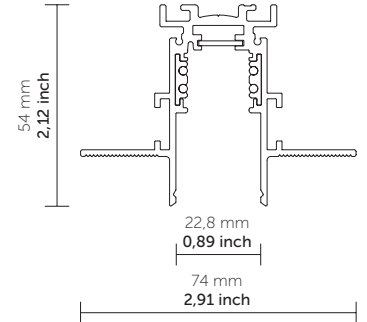

Ordering info

Model	Length	Finish	Version
-----		--	---
A9500	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	B black W white	-ST1 -ST3 (black color only) -ST2 -ST5 (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		


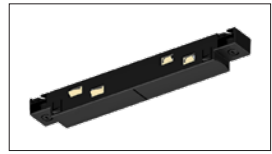
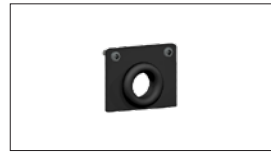

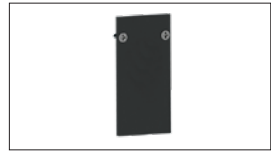






(*) adapter for Track Multisystem 9500 series

*For other CRI, KELVIN and other customization please contact the cunsomer service

Ordering example: **A9500 B ST1**

M 080 48 12

Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Live end	Straight connector	Dead end for ST1/ST6	Dead end for ST1/ST6	Dead end for ST3
				
A9501/B A9501/W	A9503/B A9503/W	A9504/ST1-B A9504/ST1-W	A9504/ST1-B-F A9504/ST1-W-F	A9504/ST3-B A9504/ST3-W
Dead end for ST2/ST5	Dead end for ST2/ST5	Suspension for ST1/ST3	Suspension for ST1/ST3	Suspension for ST2
				
A9504/ST2-B A9504/ST2-W	A9504/ST2-B-F A9504/ST2-W-F	A519/3	A519/3/B	A619/3
Suspension for ST2	Suspension for ST5			
				
A619/3/B	A819/3/B			

Date		Type	
Specifier		Project Name	




EMA TRACK

Low voltage track
 Low voltage magnetic system Serie 9500 (*)

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black

Listings: US LISTED

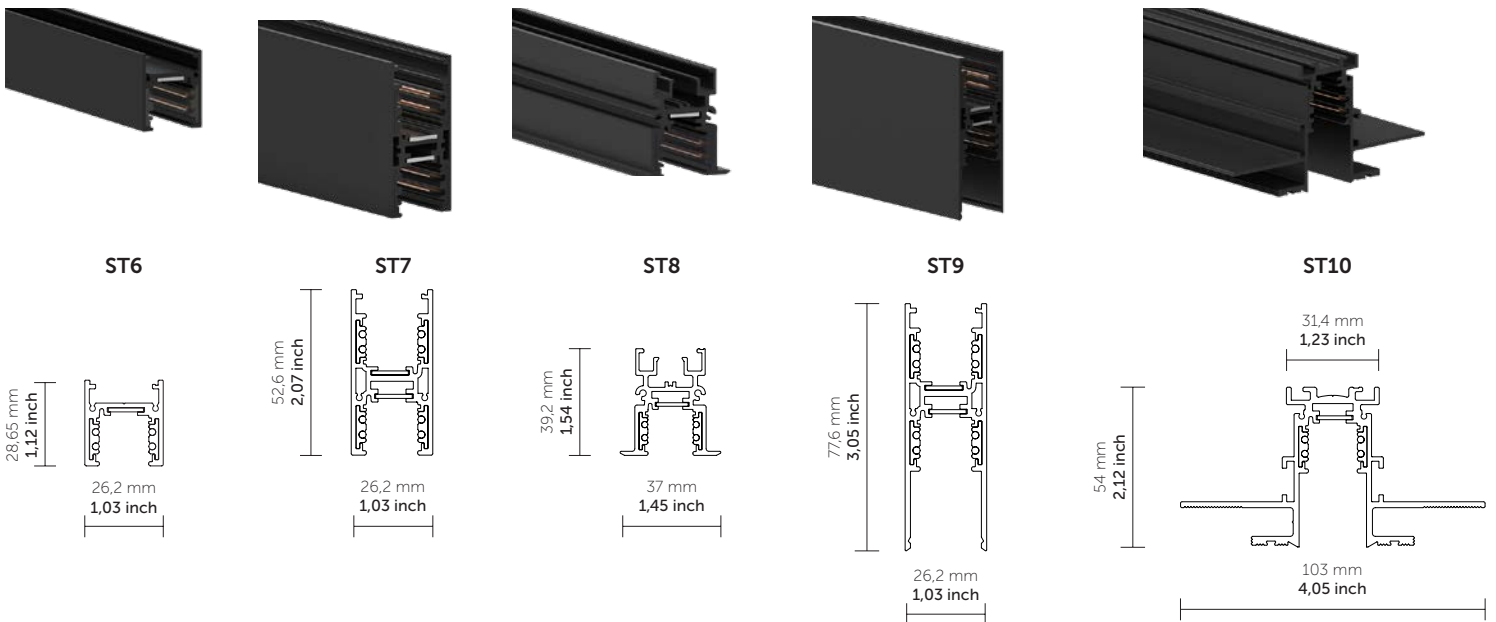

Ordering info

Model	Length	Finish	Version
----		--	---
A9500	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	B black W white	- ST6 - ST7 - ST8 (black color only) - ST9 (black color only) - ST10 (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		

Ordering example: **A9500 B ST1**

(*) adapter for Track Multisystem 9500 series

*For other CRI, KELVIN and other customization please contact the cunsomer service

M 080 48 12

Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Live end	Straight connector	Dead end for ST1/ST6	Dead end for ST1/ST6	Dead end for ST3
A9501/B A9501/W	A9503/B A9503/W	A9504/ST1-B A9504/ST1-W	A9504/ST1-B-F A9504/ST1-W-F	A9504/ST3-B A9504/ST3-W
Dead end for ST2/ST5	Dead end for ST2/ST5	Suspension for ST1/ST3	Suspension for ST1/ST3	Suspension for ST2
A9504/ST2-B A9504/ST2-W	A9504/ST2-B-F A9504/ST2-W-F	A519/3	A519/3/B	A619/3
Suspension for ST2	Suspension for ST5			
A619/3/B	A819/3/B			