

Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>



# EMA 03


Design: QUATTROBI TECHNICAL DEPARTMENT

Led track light projector with magnetic fastening system.

Listings: US LISTED




## M3003

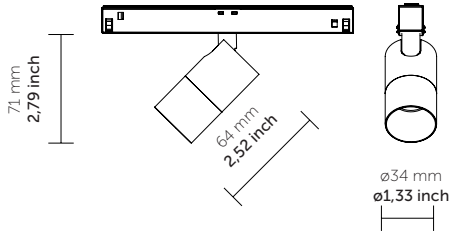

Track type - ST1, ST3, ST6, ST8

## M3023

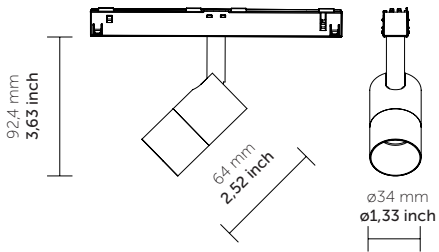

Track type - ST2, ST5, ST10, ST14

## PRODUCT FEATURES

Type:	Track
Applications:	Indoor
Luminaire material:	Aluminium alloys
Protective screen:	Polycarbonate
Light source:	LED
Power Supply:	DC/DC led driver integrated
Wattage:	7
Delivered lumens:	610 lm max
Color Temp:	3000K, 3500K
CRI:	80+
Dimming:	0/1-10V dim

### Specification recap

Type	Item #	Quantity

\*Please make sure to include fixture and any accessories.

## Ordering info

Model	Adapter	Cri/Color	Beam	Dimming	Finish
-----	-	----	-		--
<b>M3003</b> (1x7W) <b>M3023</b> (1x7W) <b>M3033</b> (1x7W)	<b>P</b> Serie 9600 compatible (*) <b>K</b> Serie 9500 compatible (***)	<b>8030</b> 80CRI/3000K <b>8035</b> 80CRI/3500K <b>8040</b> 80CRI/4000K <b>8030</b> 90CRI/3000K	<b>S</b> Spot <b>M</b> Medium <b>W</b> Wide <b>E</b> Elliptical  Other on request	<b>1.</b> On/off <b>A</b> 0-10V (*) <b>D</b> Dali	<b>01</b> white <b>02</b> black  Other on request

Ordering example : **M3003 P 8030 M 01**

(\*) adapter for Micro Track 9600 series, installable only in class 2 circuit

(\*\*\*) adapter for Multisystem Evo 9500 series, Installable in isolated Low voltage circuits and in Class2 circuit

Long arm version for St2, St5, St10, St14 Multisystem Evo 9500 track, on request

(°) not available for P version Serie Micro 9600

# EMA 03

Design: QUATTROBI TECHNICAL DEPARTMENT




Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	7W
Factor	1.0

## Photometry


**8030 S 7W 3000K CRI80 22°**  
Lumens: 590

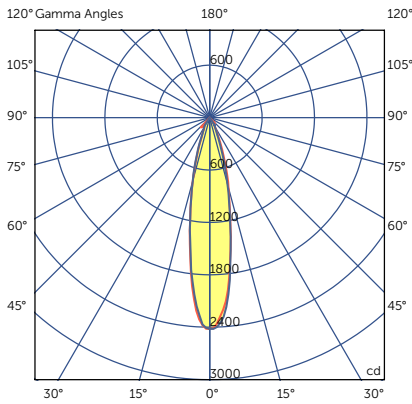

Candelas at Nadir

Deg	Candela
0	2417.92
5	2111.49
15	832.29
25	210.08
35	82.96
45	0.00


**8030 M 7W 3000K CRI80 37°**  
Lumens: 590

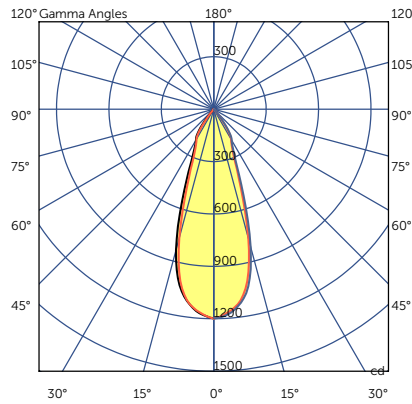

Candelas at Nadir

Deg	Candela
0	1198.88
5	1154.63
15	762.87
25	250.34
35	120.54
45	2.75

**8030 EL 7W 3000K CRI80 42° x 19°**  
Lumens: 590

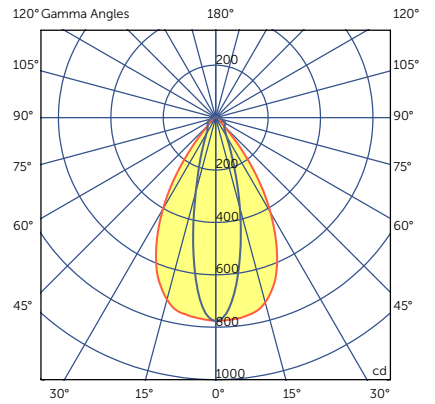

Candelas at Nadir

Deg	Candela
0	775.26
5	772.31
15	729.24
25	551.24
35	256.94
45	45.26

Date		Type	
Specifier		Project Name	



# EMA TRACK

Led track light projector with magnetic fastening system.


## PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black


Listings: US LISTED




ST1




ST2



ST3

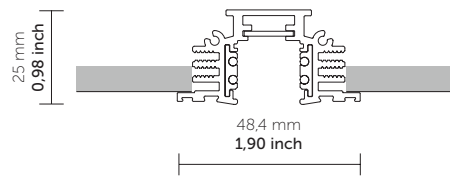

ST5

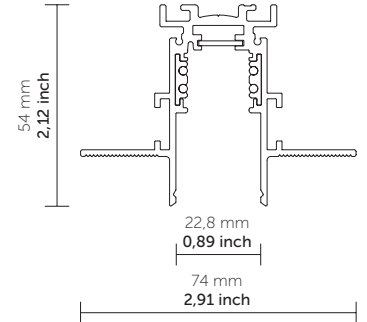

### Ordering info

Model	Length	Finish	Version
-----		--	---
<b>A9500</b>	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	<b>B</b> black <b>W</b> white	<b>-ST1</b> <b>-ST3</b> (black color only) <b>-ST2</b> <b>-ST5</b> (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		


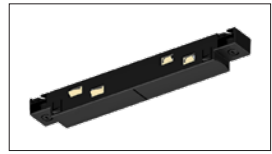
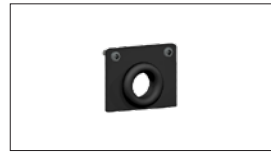

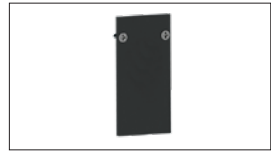






(\*) adapter for Track Multisystem 9500 series

\*For other CRI, KELVIN and other customization please contact the cunsomer service

Ordering example: **A9500 B ST1**

**M 080 48 12**

Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

Live end	Straight connector	Dead end for ST1/ST6	Dead end for ST1/ST6	Dead end for ST3
				
<b>A9501/B</b> <b>A9501/W</b>	<b>A9503/B</b> <b>A9503/W</b>	<b>A9504/ST1-B</b> <b>A9504/ST1-W</b>	<b>A9504/ST1-B-F</b> <b>A9504/ST1-W-F</b>	<b>A9504/ST3-B</b> <b>A9504/ST3-W</b>
Dead end for ST2/ST5	Dead end for ST2/ST5	Suspension for ST1/ST3	Suspension for ST1/ST3	Suspension for ST2
				
<b>A9504/ST2-B</b> <b>A9504/ST2-W</b>	<b>A9504/ST2-B-F</b> <b>A9504/ST2-W-F</b>	<b>A519/3</b>	<b>A519/3/B</b>	<b>A619/3</b>
Suspension for ST2	Suspension for ST5			
				
<b>A619/3/B</b>	<b>A819/3/B</b>			

Date		Type	
Specifier		Project Name	




# EMA TRACK

Low voltage track  
Low voltage magnetic system Serie 9500 (\*)

## PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Track housing	Extruded aluminum
Finishing	White, Black

Listings: US LISTED

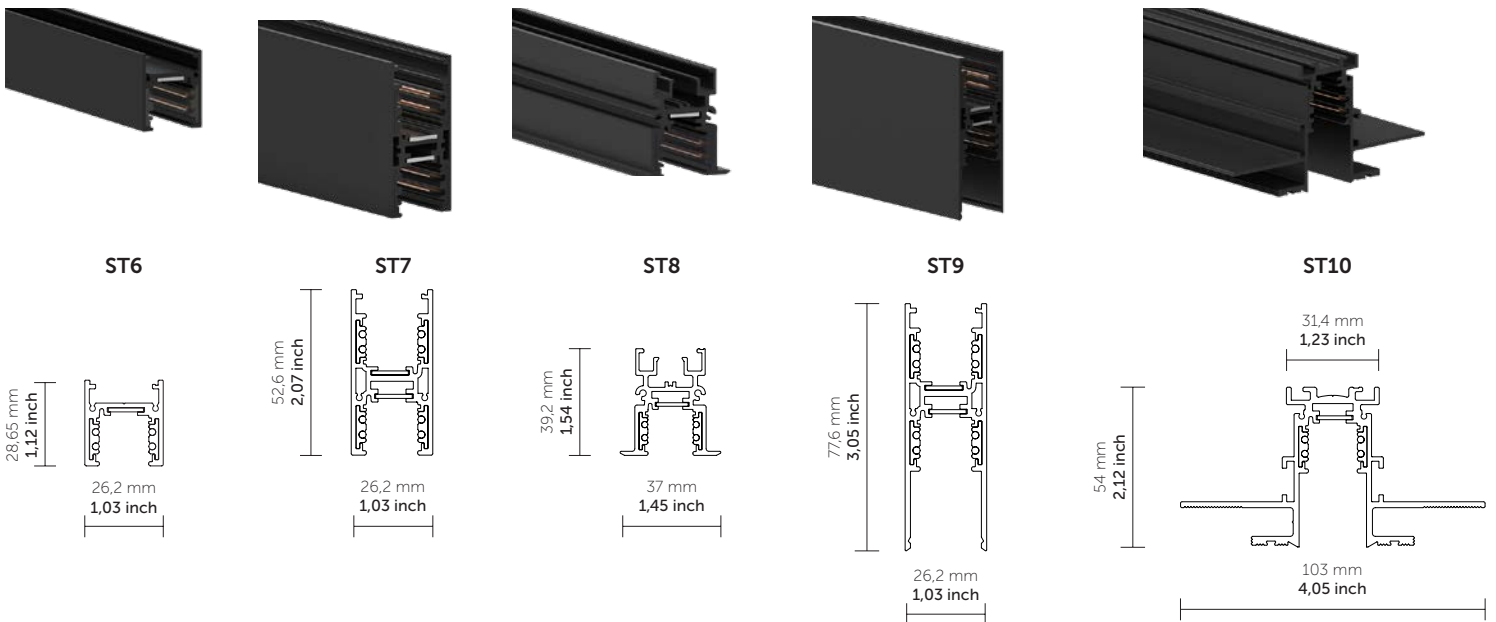

### Ordering info

Model	Length	Finish	Version
----		--	---
<b>A9500</b>	-1/ 39,37" (1 mt.) -2/ 78,74" (2 mt.) -3/ 118,1" (3mt.)	<b>B</b> black <b>W</b> white	- <b>ST6</b> - <b>ST7</b> - <b>ST8</b> (black color only) - <b>ST9</b> (black color only) - <b>ST10</b> (black color only)
	-4' / 1219,2 mm -8' / 2438,4 mm in request		


Ordering example: **A9500 B ST1**

(\*) adapter for Track Multisystem 9500 series

\*For other CRI, KELVIN and other customization please contact the cunsomer service

**M 080 48 12**

Remote Driver, input voltage 120V 60Hz , output class2 48V DC 2Amps

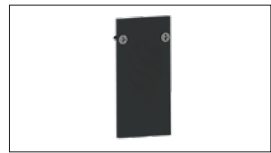Live end	Straight connector	Dead end for ST1/ST6	Dead end for ST1/ST6	Dead end for ST3
				
<b>A9501/B</b> <b>A9501/W</b>	<b>A9503/B</b> <b>A9503/W</b>	<b>A9504/ST1-B</b> <b>A9504/ST1-W</b>	<b>A9504/ST1-B-F</b> <b>A9504/ST1-W-F</b>	<b>A9504/ST3-B</b> <b>A9504/ST3-W</b>
Dead end for ST2/ST5	Dead end for ST2/ST5	Suspension for ST1/ST3	Suspension for ST1/ST3	Suspension for ST2
				
<b>A9504/ST2-B</b> <b>A9504/ST2-W</b>	<b>A9504/ST2-B-F</b> <b>A9504/ST2-W-F</b>	<b>A519/3</b>	<b>A519/3/B</b>	<b>A619/3</b>
Suspension for ST2	Suspension for ST5			
				
<b>A619/3/B</b>	<b>A819/3/B</b>			