

Date

Specifier

Type

Project Name





INK

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries..



Lisittings: c US LISTED



PRODUCT FEATURES

Type:	Track
Applications:	Indoor
Luminaire material:	Aluminium alloys
Protective screen:	Tempered glass
Light source:	LED
Power Supply:	Electronic constant current LED driver, 120V 60Hz
Wattage:	15, 26, 35, 40
Delivered lumens:	1548 lm - 5293 lm
Color Temp:	3000K, 3500K, 4000K
CRI:	80+, 90+
Dimming:	Phase cut dimming

0° - 90° vertical tilting / 355° horizontal rotation

Specification recap

Type	Item #	Quantity

*Please make sure to include fixture and any accessories.

Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
IK101 18W120V IK103 25W120V IK105 37W120V IK107 48W120V	S Stucchi Onetrack(*) compatible X Global(*) XTS compatible G Global(*) GES compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **IK101 S 8030 M 01** For track info see page 246

(*) ONETRACK is a registered trade mark of STUCCHI

(*) Global is a registered trade mark of Nordic Aluminium


Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	15W	26W
Factor	1.0	1.596

Photometry


8030 S 15W 3000K CRI80 13°
Lumens: 1575

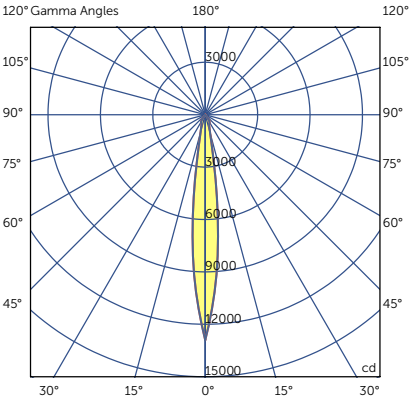

Candelas at Nadir

Deg	Candela
0	12901.19
5	8119.67
15	1073.33
25	537.78
35	365.02
45	7.13


8030 M 15W 3000K CRI80 31°
Lumens: 1575

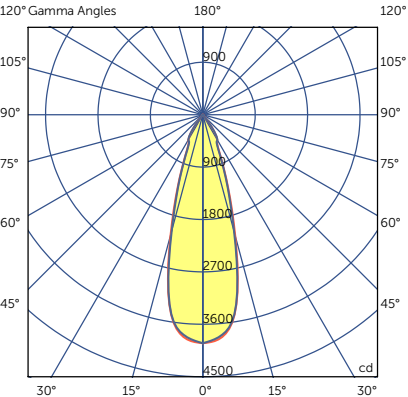

Candelas at Nadir

Deg	Candela
0	3922.74
5	3830.23
15	2146.11
25	610.79
35	300.94
45	7.64

8030 W 15W 3000K CRI80 58°
Lumens: 1575

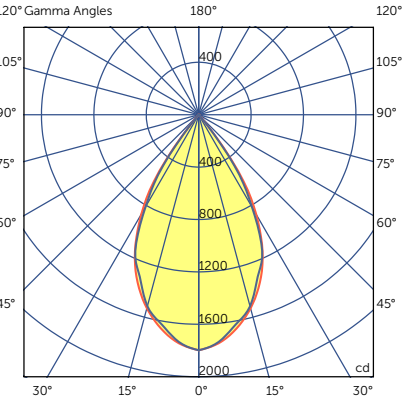

Candelas at Nadir

Deg	Candela
0	1797.54
5	1750.29
15	1529.46
25	1152.18
35	523.70
45	12.43

Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)


CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	35W	40W
Factor	1.0	1,114

Photometry

8030 S 35W 3000K CRI80 18°

Lumens: 2880

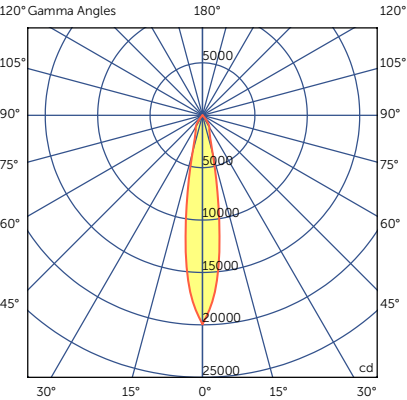


Candelas at Nadir

Deg	Candela
0	19928.94
5	15814.54
15	3721.42
25	1530.84
35	878.25
45	19.83

8030 M 35W 3000K CRI80 33°

Lumens: 2880

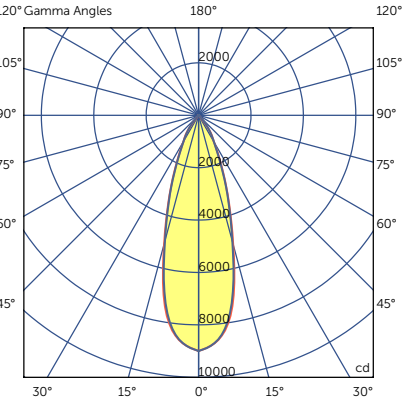


Candelas at Nadir

Deg	Candela
0	8992.62
5	8605.75
15	5095.07
25	1964.31
35	767.03
45	21.08

8030 W 35W 3000K CRI80 60°

Lumens: 2880

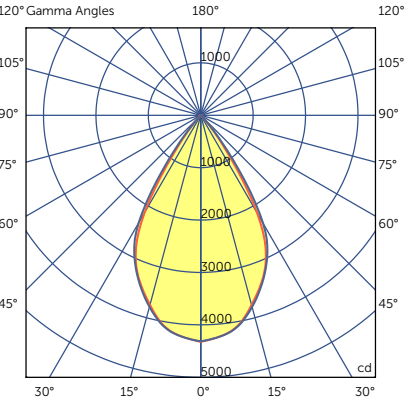

Candelas at Nadir

Deg	Candela
0	4321.61
5	4234.68
15	3744.64
25	2940.81
35	964.00
45	27.87


Date		Type	
Specifier		Project Name	





TRACK 3 circuit 120V

Design: STUCCHI

Lighting track system
Low profile , modular system
High power handling capability

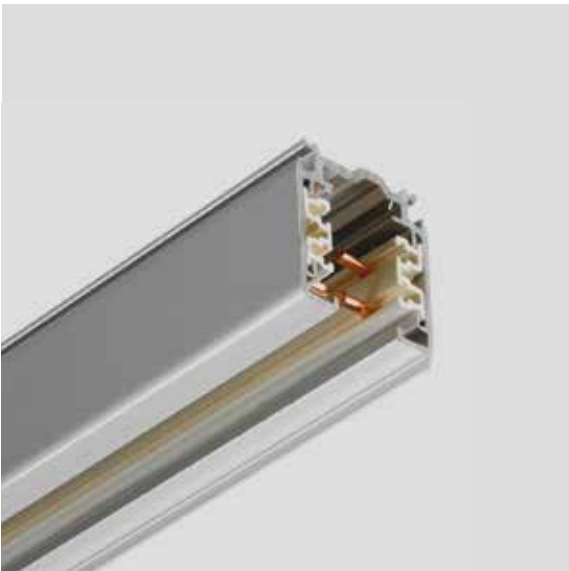

Lisittings: US LISTED

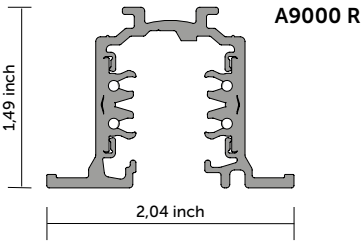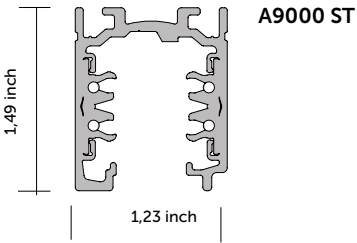

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

Ordering info

Model	Length	Finish	Version
-----		--	
A9000-UL4 A9000-UL8 A9000-UL12	4'(48") 8(96") 12'(144")	G aluminium B black W white	ST-120 R-120

Ordering example: suspended / surface **A9000-UL4/B-ST-120**
Ordering example: recessed **A9000-UL4/B-R-120**

*Please make sure to include fixture and any accessories.



A9001



A9002



A9010



A9011/A9012



A9013/A9014



A9014/A9015



A9017



A9003



A9004/A9004-R





A719/3



A719/3/B

Accessory wiring diagram

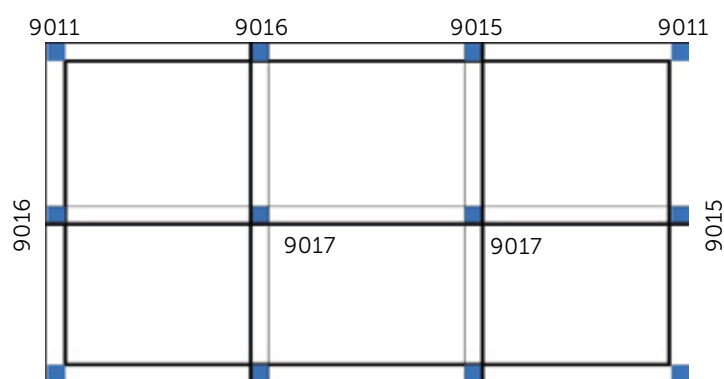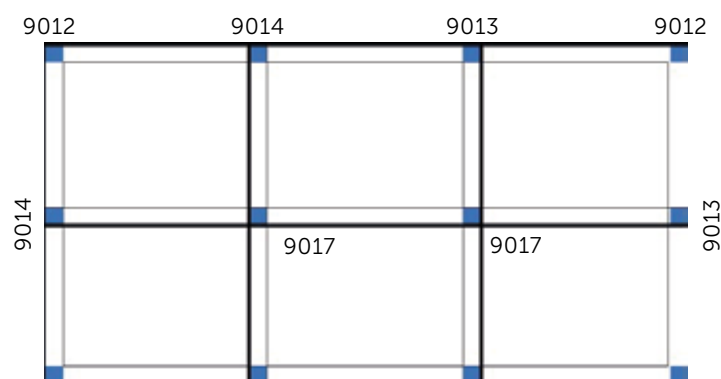

Components

Model	Finish	Additional Accessories	Finish
----	--		
A9001 end feed A9002 end feed A9010 center feed A9003 straight connector A9011-A9012 L connector A9017 X connector A9015-9016 T connector inside A9014-9013 T connector outside A9004-9004R dead end	G aluminium B black W white	S9000/T bending tool S9001-R/6 cover recessed track S9010-R/6 cover recessed track S9011-R/6 cover recessed track S9013-R/6 cover recessed track S9016-R/6 cover recessed track S9017-R/6 cover recessed track	G aluminium B black W white

Ordering example: **A9001/B-3C**

Date

Type

Specifier

Project Name



TRACK


1 circuit 120V

Design: GLOBAL

Led track light projector with magnetic fastening system.



Lisittings: c  US LISTED



GES

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

Ordering info

Model	Length	Finish
-----		--
GES204 GES208 GES212	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: **GES204 1**

*Please make sure to include fixture and any accessories.



GES11



GES14



GES34



GES23



GES39



GES40



GES38




GES21



GES41

Accessory wiring diagram

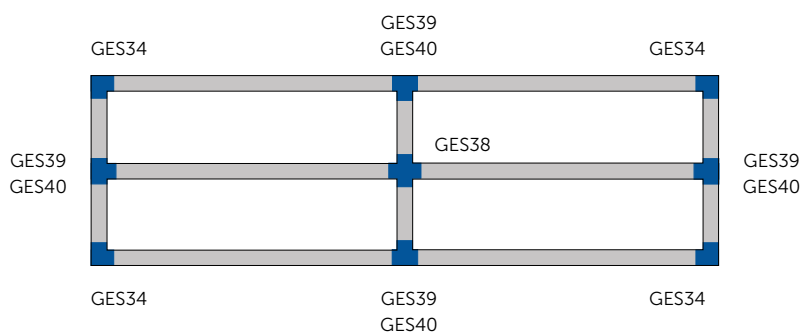

Components

Model	Finish	Additional Accessories
-----	--	
GES11 end feed left GES14 center feed GES15 outlet box cover GES17 t-bar feed kit GES21 straight connector GES23 straight connector GES34 L connector adjustable GES38 X connector GES40 T connector adjustable GES41 dead end GES67 floating feed GES70 monopoint canopy GEA10 universal stem suspension point GEA11 end feed stem suspension point GEA3712 12" steam kit includeas steam and canopy GEA3718 18" steam kit includeas steam and canopy GEA3724 24" steam kit includeas steam and canopy GEA3748 48" steam kit includeas steam and canopy	1 aluminium 2 black 3 white GEA COD. Only -2=black -3 =white	GEA21 track reinforcement plate GEA6 thread rod mounting clip GEA7 t-bar mounting clip

Ordering example: **GES11 2**


Date		Type	
Specifier		Project Name	




TRACK 3 circuit 120V

Design: GLOBAL

Lighting track system
Low profile , modular system
High power handling capability

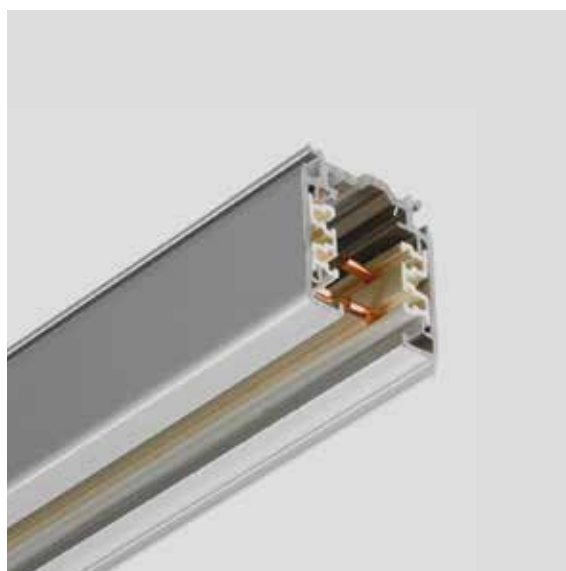


Listings: c US LISTED



XTS

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



FTP

Ordering info

Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44 XTS48 XTS412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**



XTS11



XTS12



XTS14



XTS34



XTS23



XTS39



XTS40



XTS38



XTS21



XTS41



SKB12



SKB34





SKB34/3



SKB30

Accessory wiring diagram

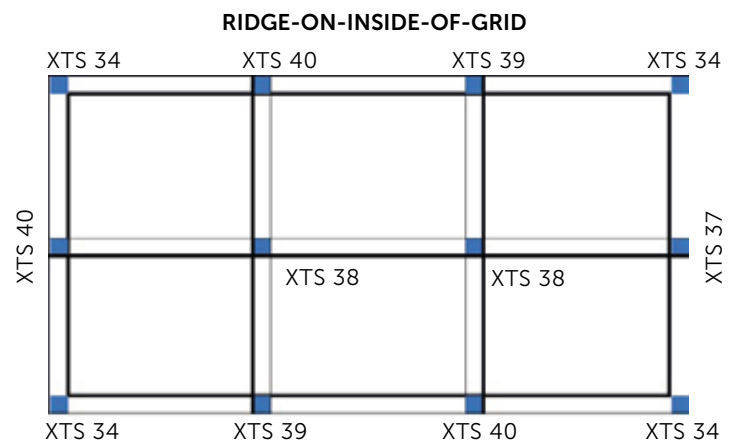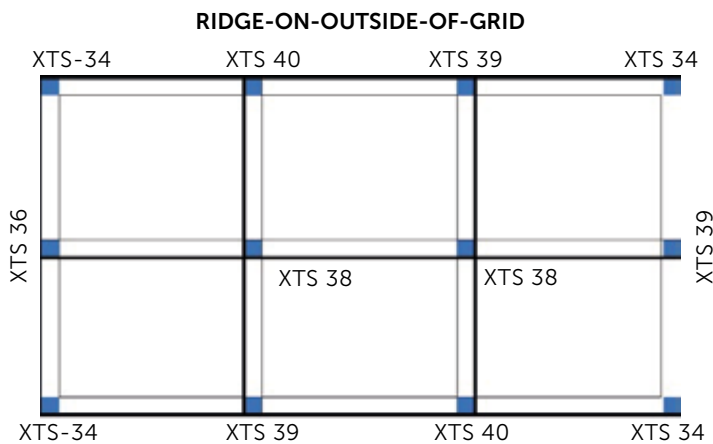

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**