

Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>




KOR

Design: QUATTROBI TECHNICAL DEPARTMENT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



Listings: US LISTED

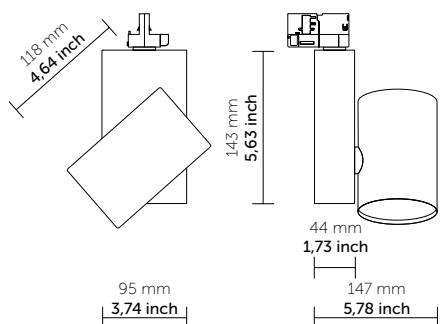

0° - 90° vertical tilting / 355° horizontal rotation

PRODUCT FEATURES

Type:	Track
Applications:	Indoor
Luminaire material:	Aluminium alloys
Protective screen:	Tempered glass
Light source:	LED
Power Supply:	Electronic constant current LED driver, 120V 60Hz
Wattage:	15, 26, 35
Delivered lumens:	1000 lm - 4304 lm
Color Temp:	2400K (FLS), 2700K, 3000K, 3500K, 4000K
CRI:	80+, 90+, CRIMAX, F90
Dimming:	Phase cut dimming

Specification recap

Type	Item #	Quantity

*Please make sure to include fixture and any accessories.

Ordering info

Model	Adapter	Cri/Color	Beam	Driver/Dimmer	Finish
-----	-	----	-	-	--
KR105 15W120V KR103 26W120V KR107 35W120V Phase cut dimming only KR107 on request	G Global(*) GES compatible X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K	S Spot M Medium W Wide	Phase cut dimming	01 white 02 black 18 grey


*For other CRI, KELVIN and other customization please contact the cunsomer service

Ordering example : **KR105 G 8030 M 01**

(*) Global is a registered trade mark of Nordic Aluminium

Accessories

SA101
Directional louvers



SA200
Honeycomb filter



SA300
Fresnel lens




SA400
Snoot



SA201 use only with SA101

GA70
Adapter kit for ceiling installation - white, grey, black

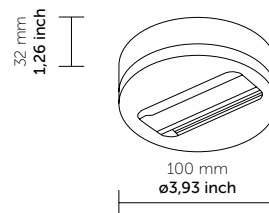


Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	15W	26W
Factor	1.0	1.596

Photometry


8030 S 15W 3000K CRI80 13°
Lumens: 1575

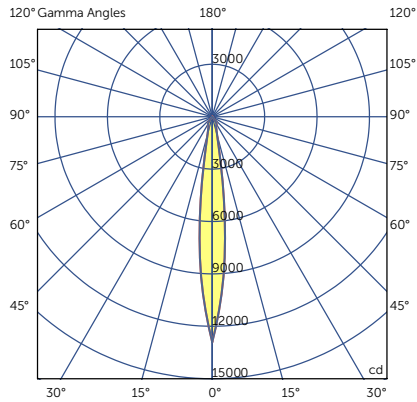

Candelas at Nadir

Deg	Candela
0	12901.19
5	8119.67
15	1073.33
25	537.78
35	365.02
45	7.13


8030 M 15W 3000K CRI80 31°
Lumens: 1575

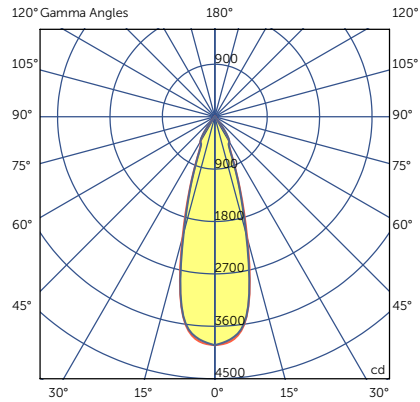

Candelas at Nadir

Deg	Candela
0	3922.74
5	3830.23
15	2146.11
25	610.79
35	300.94
45	7.64

8030 W 15W 3000K CRI80 58°
Lumens: 1575

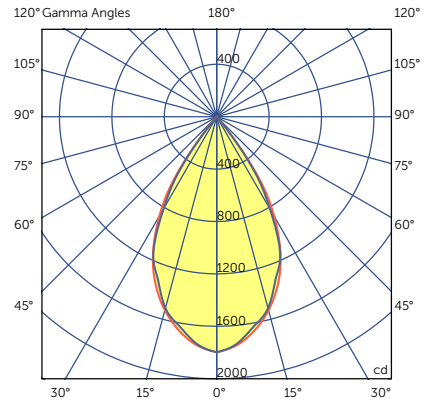

Candelas at Nadir

Deg	Candela
0	1797.54
5	1750.29
15	1529.46
25	1152.18
35	523.70
45	12.43


Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	35W
Factor	1.0

Photometry


8030 S 35W 3000K CRI80 18°
Lumens: 2880

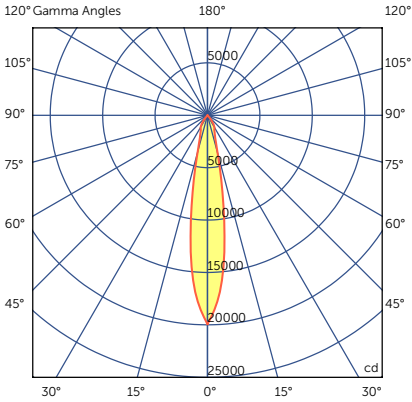

Candelas at Nadir

Deg	Candela
0	19928.94
5	15814.54
15	3721.42
25	1530.84
35	878.25
45	19.83


8030 M 35W 3000K CRI80 33°
Lumens: 2880

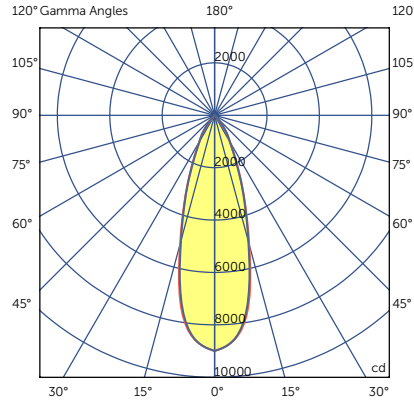

Candelas at Nadir

Deg	Candela
0	8992.62
5	8605.75
15	5095.07
25	1964.31
35	767.03
45	21.08

8030 W 35W 3000K CRI80 60°
Lumens: 2880

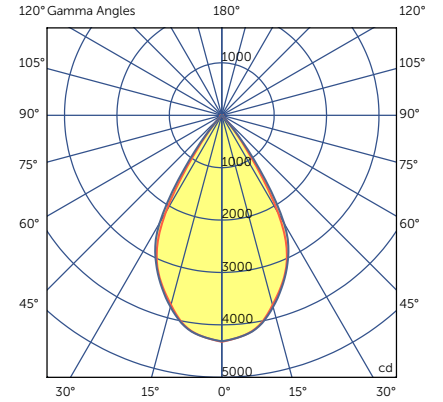

Candelas at Nadir

Deg	Candela
0	4321.61
5	4234.68
15	3744.64
25	2940.81
35	964.00
45	27.87

Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>




TRACK 1 circuit 120V

Design: GLOBAL

Led track light projector with magnetic fastening system.



Listings: US LISTED

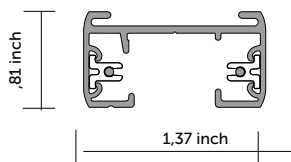

GES

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

Ordering info

Model	Length	Finish
-----		--
GES204	4'(48")	1 aluminium
GES208	8(96")	2 black
GES212	12'(144")	3 white

Ordering example: **GES204 1**

*Please make sure to include fixture and any accessories.


Quattrobi Inc. 2003 NW Royal Fern CT, Palm City, FL 34990 +1.347.613.5772 info@quattrobi.net

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on this sheet is subject to change at the discretion of Quattrobi Inc.

© copyright Quattrobi Inc 2024



Accessory wiring diagram

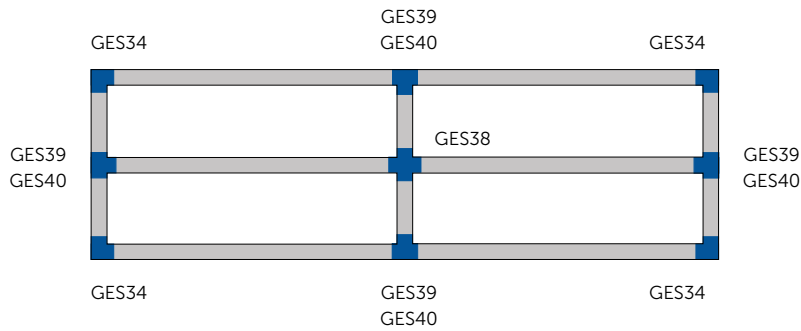

Components

Model	Finish	Additional Accessories
-----	--	
GES11 end feed left GES14 center feed GES15 outlet box cover GES17 t-bar feed kit GES21 straight connector GES23 straight connector GES34 L connector adjustable GES38 X connector GES40 T connector adjustable GES41 dead end GES67 floating feed GES70 monopoint canopy GEA10 universal stem suspension point GEA11 end feed stem suspension point GEA3712 12" steam kit includeas steam and canopy GEA3718 18" steam kit includeas steam and canopy GEA3724 24" steam kit includeas steam and canopy GEA3748 48" steam kit includeas steam and canopy	1 aluminium 2 black 3 white GEA COD. Only -2=black -3 =white	GEA21 track reinforcement plate GEA6 thread rod mounting clip GEA7 t-bar mounting clip

Ordering example: **GES11 2**


Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>




TRACK 3 circuit 120V

Design: GLOBAL

Lighting track system
Low profile , modular system
High power handling capability

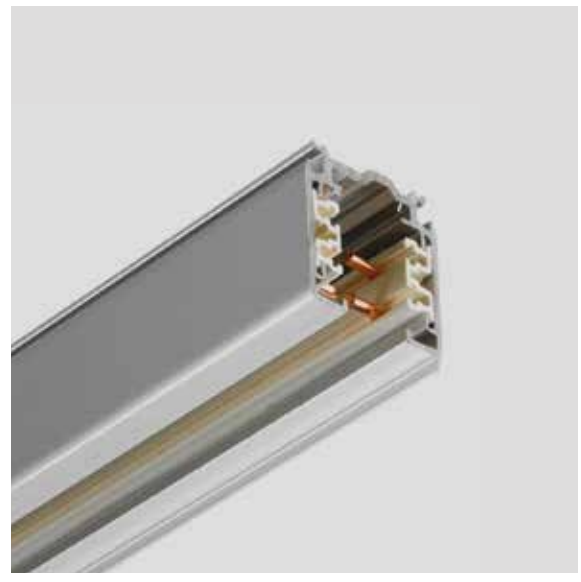


Listings: US LISTED



XTS

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

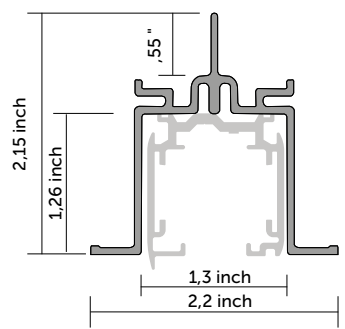

FTP

Ordering info

Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44	4'(48")	1 aluminium	FTP44	4'(48")	1 aluminium
XTS48	8(96")	2 black	FTP48	8(96")	2 black
XTS412	12'(144")	3 white	FTP412	12'(144")	3 white


Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**

*Please make sure to include fixture and any accessories.



Accessory wiring diagram

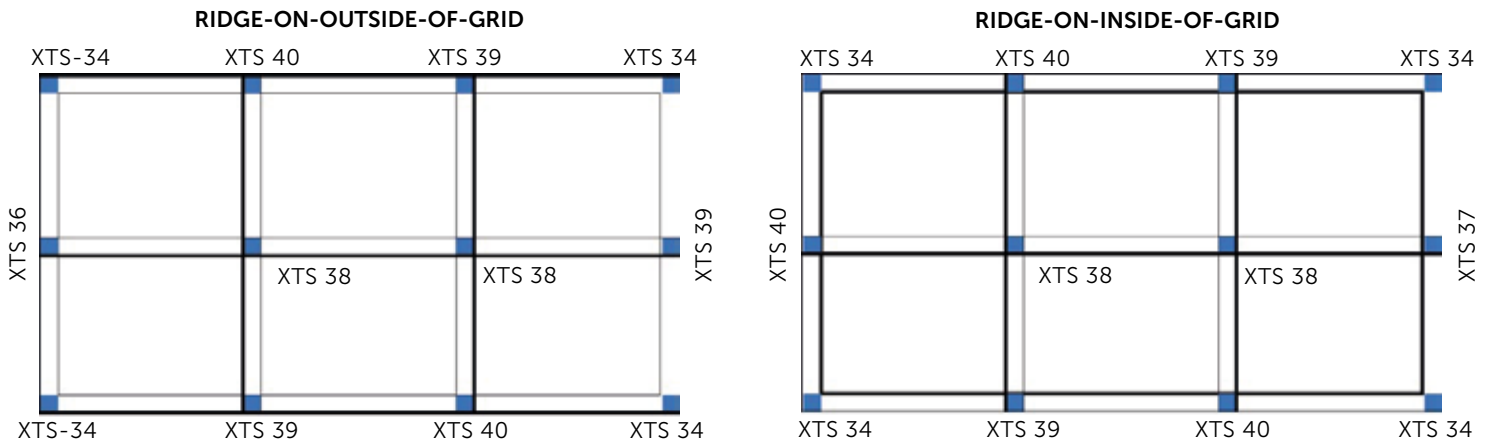

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**