

Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>




PHOTO

Design: LUCA RACIOPPO ARCHITECT

Track adjustable projector with LED lighting system. Optical unit with front tempered glass protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



Listings: US LISTED

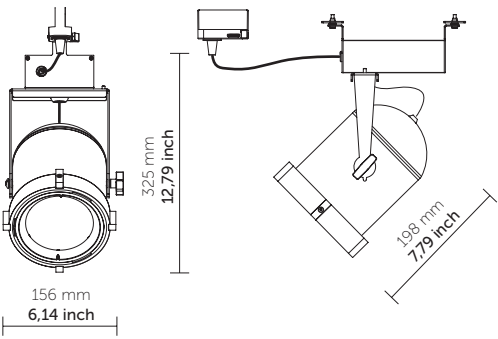

0° - 90° vertical tilting / 355° horizontal rotation

PRODUCT FEATURES

- Type: Track
- Applications: Indoor
- Luminaire material: Aluminium alloys
- Protective screen: Tempered glass
- Light source: LED
- Power Supply: Electronic constant current LED driver, 120V 60Hz
- Wattage: 15, 26
- Delivered lumens: 1085 lm - 2649 lm
- Color Temp: 2700K, 3000K, 3500K, 4000K
- CRI: 80+, 90+, CRIMAX, F90
- Dimming: Phase cut dimming

Specification recap

Type	Item #	Quantity

*Please make sure to include fixture and any accessories.

PHOTO

Design: LUCA RACIOPPO ARCHITECT



Ordering info

Model	Adapter	Cri/Color	Beam	Finish	Driver/Dimmer
-----	-	----	-	--	-
CV001 26W 120V	X Global(*) XTS compatible	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request	Phase cut dimming

Ordering example : **CV001 S 8030 M 01**

*For other CRI, KELVIN and other customization please contact the customer service

(*) Global is a registered trade mark of Nordic Aluminium

Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)


CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	15W	26W
Factor	1.0	1.596

Photometry

8030 S 15W 3000K CRI80 13°

Lumens: 1575

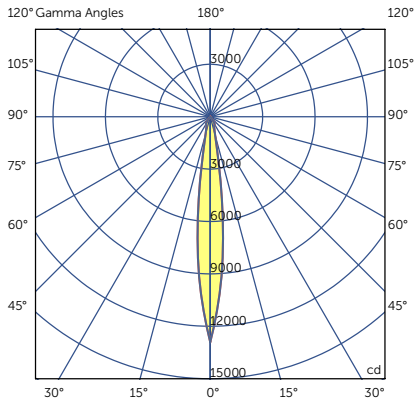


Candelas at Nadir

Deg	Candela
0	12901.19
5	8119.67
15	1073.33
25	537.78
35	365.02
45	7.13

8030 M 15W 3000K CRI80 31°

Lumens: 1575

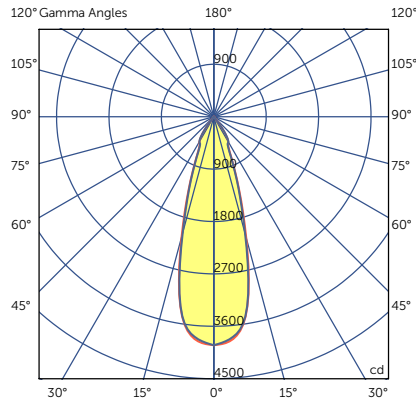


Candelas at Nadir

Deg	Candela
0	3922.74
5	3830.23
15	2146.11
25	610.79
35	300.94
45	7.64

8030 W 15W 3000K CRI80 58°

Lumens: 1575

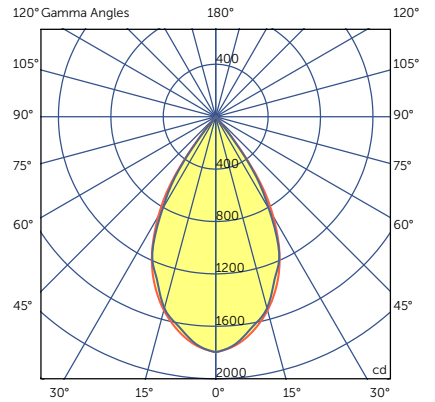

Candelas at Nadir

Deg	Candela
0	1797.54
5	1750.29
15	1529.46
25	1152.18
35	523.70
45	12.43

*Please make sure to include fixture and any accessories.


Date	<input type="text"/>	Type	<input type="text"/>
Specifier	<input type="text"/>	Project Name	<input type="text"/>




TRACK 3 circuit 120V

Design: GLOBAL

Lighting track system
Low profile , modular system
High power handling capability

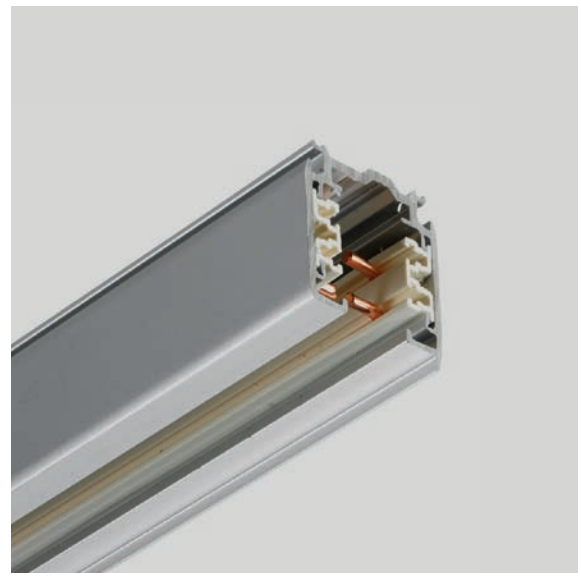


Listings: US LISTED



XTS

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

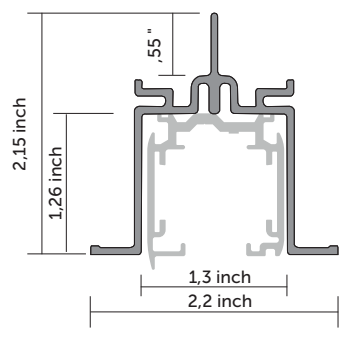

FTP

Ordering info


Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44	4'(48")	1 aluminium	FTP44	4'(48")	1 aluminium
XTS48	8(96")	2 black	FTP48	8(96")	2 black
XTS412	12'(144")	3 white	FTP412	12'(144")	3 white

Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**



Accessory wiring diagram

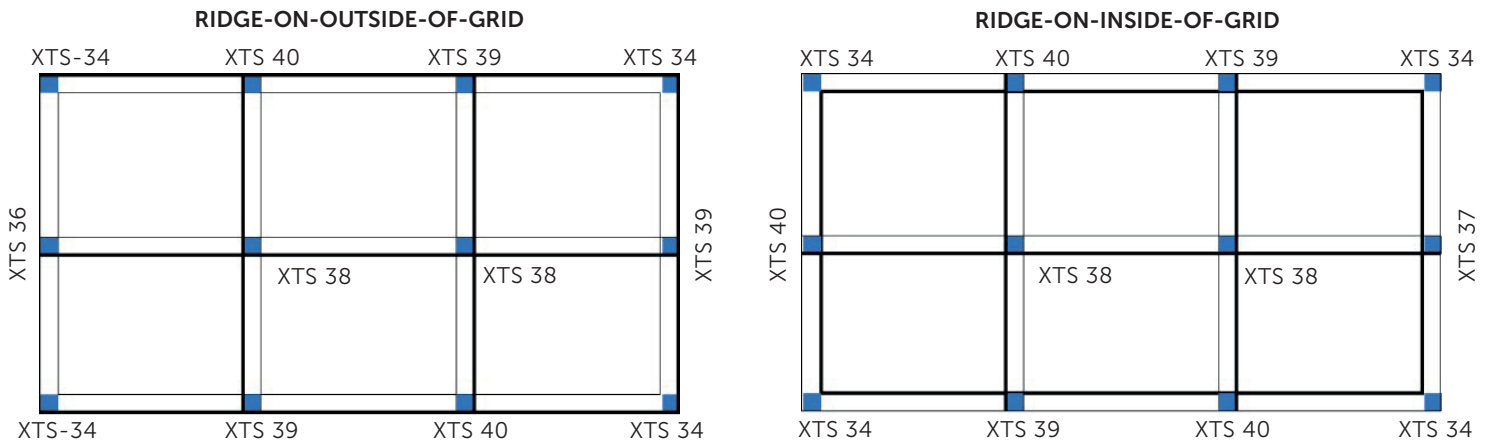

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**