

Date

Type

Specifier

Project Name




SMOKE 130

Design: QUATTROBI TECHNICAL DEPARTMENT

Cylindrical fixture with LED lighting system. Optical unit with front protective screen. Complete with electronic driver. Suitable for indoor applications such as retail stores, museums and art galleries.



Lisitings: c  US LISTED

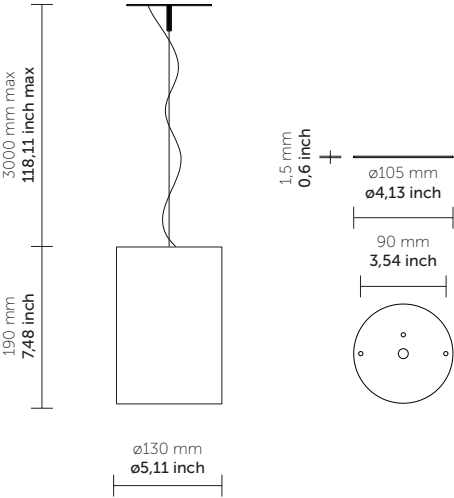

PRODUCT FEATURES

Type:	Suspension
Applications:	Indoor
Luminaire material:	Aluminium alloys
Light source:	LED
Power Supply:	Electronic constant current LED driver, 120V 60Hz
Wattage:	15, 25, 37, 48
Delivered lumens:	1000 lm - 5293 lm
Color Temp:	2700K, 3000K, 3500K, 4000K
CRI:	80+, 90+, CRIMAX, F90

Specification recap

Type	Item #	Quantity

*Please make sure to include fixture and any accessories.

SMOKE 130

Design: QUATTROBI TECHNICAL DEPARTMENT



Ordering info

Model	Adapter	Cri/Color	Beam	Finish
-----	-	----	-	--
SM251 15W120V SM253 25W120V SM255 37W120V SM257 48W120V	G Global(*) GES compatible X Global(*) XTS compatible J Junction box	8030 80CRI/3000K 8035 80CRI/3500K 8040 80CRI/4000K 9024 90CRI/2400K (FLS) 9027 90CRI/2700K 9030 90CRI/3000K 9035 90CRI/3500K 9730 97CRI/3000K CR27 CRIMAX/2700K CR30 CRIMAX/3000K CR35 CRIMAX/3500K CR40 CRIMAX/4000K F930 F90CRI/3000K F935 F90CRI/3500K F940 F90CRI/4000K Decor versions and other on request	S Spot M Medium W Wide Other on request	01 white 02 black 18 grey Other on request

Ordering example : **SM251 G 8030 M 01**


Multiplying factors: (Multiplying Factor is based on 80CRI/3000K)

CCT	80CRI/3000K	80CRI/3500K	80CRI/4000K	90CRI/3000K
Factor	1.0	1,035	1,053	0,847

Wattage	15W	25W
Factor	1.0	1.426

Photometry


8030 S 15W 3000K CRI84 19°
Lumens: 1575

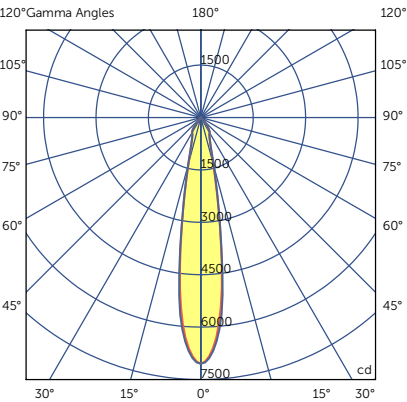

Candelas at Nadir

Deg	Candela
0	7045.17
5	5927.59
15	1363.66
25	580.57
35	376.35
45	14.20


8030 M 15W 3000K CRI84 38°
Lumens: 1575

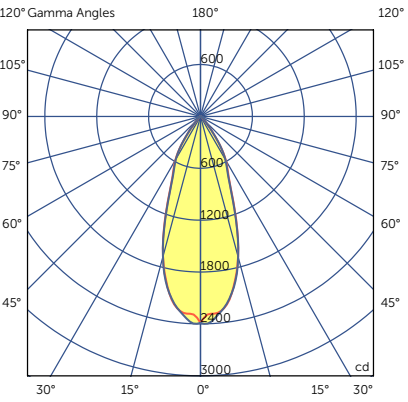

Candelas at Nadir

Deg	Candela
0	2386.64
5	2279.58
15	1677.78
25	768.36
35	347.27
45	48.89

8030 W 15W 3000K CRI84 55°
Lumens: 1575

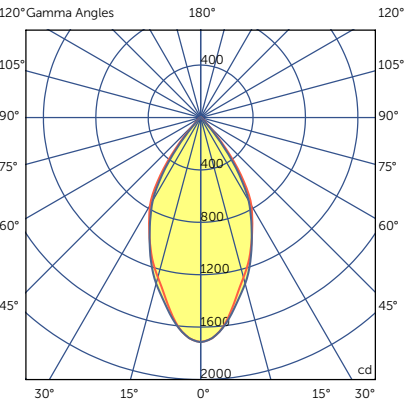

Candelas at Nadir

Deg	Candela
0	1713.60
5	1639.58
15	1262.52
25	930.98
35	535.50
45	67.35

Date		Type	
Specifier		Project Name	




TRACK
1 circuit 120V
Design: GLOBAL

Led track light projector with magnetic fastening system.



Lisittings: c US LISTED



GES

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black

Ordering info

Model	Length	Finish
-----		--
GES204 GES208 GES212	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: **GES204 1**



GES11



GES14



GES34



GES23



GES39




GES40



GES38




GES21



GES41

Accessory wiring diagram

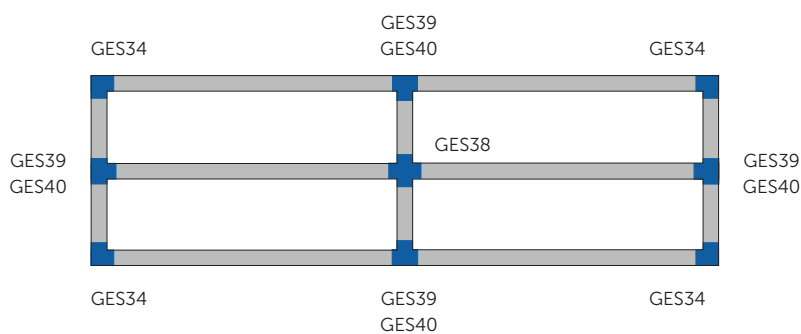

Components


Model	Finish	Additional Accessories
-----	--	
GES11 end feed left GES14 center feed GES15 outlet box cover GES17 t-bar feed kit GES21 straight connector GES23 straight connector GES34 L connector adjustable GES38 X connector GES40 T connector adjustable GES41 dead end GES67 floating feed GES70 monopoint canopy GEA10 universal stem suspension point GEA11 end feed stem suspension point GEA3712 12" steam kit includes steam and canopy GEA3718 18" steam kit includes steam and canopy GEA3724 24" steam kit includes steam and canopy GEA3748 48" steam kit includes steam and canopy	1 aluminium 2 black 3 white GEA COD. Only -2=black -3 =white	GEA21 track reinforcement plate GEA6 thread rod mounting clip GEA7 t-bar mounting clip

Ordering example: **GES11 2**


TRACK 3 circuit 120V

Design: GLOBAL

Lighting track system
Low profile , modular system
High power handling capability

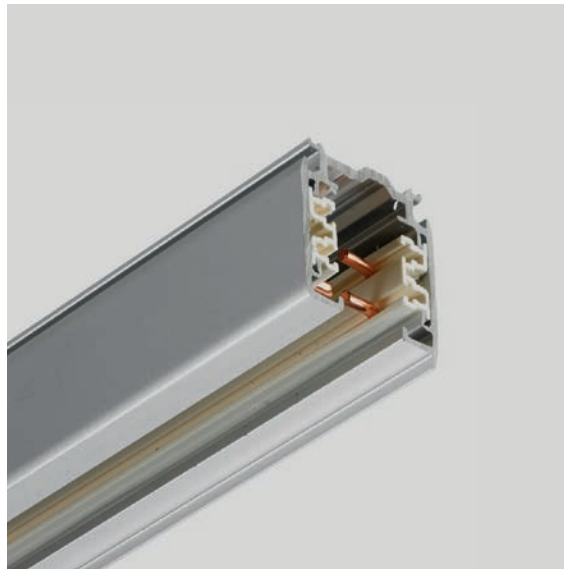


Listings: c  US LISTED



XTS

PRODUCT FEATURES

Installation	Suspended / Surface / Recessed
Luminaire housing	Extruded aluminum
Finishing	White, Grey, Black



FTP

Ordering info


Model	Length	Finish	Model	Length	Finish
-----		--	-----		--
XTS44 XTS48 XTS412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white	FTP44 FTP48 FTP412	4'(48") 8(96") 12'(144")	1 aluminium 2 black 3 white

Ordering example: suspended / surface **XTS44 1**

Ordering example: recessed **XTS44 1 + FTP44 2**



Accessory wiring diagram

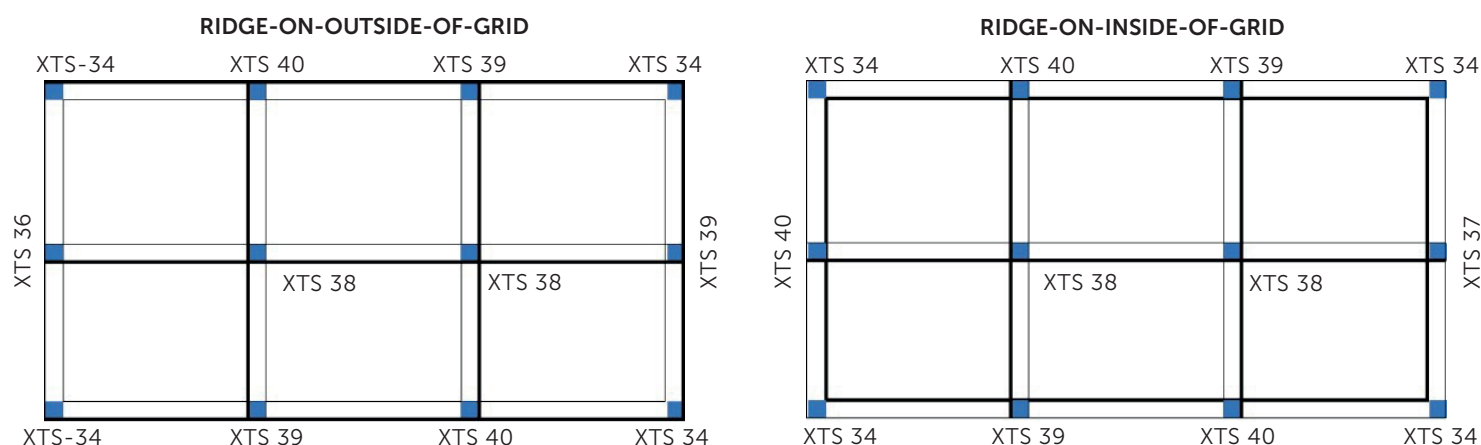

Components

Model	Finish	Additional Accessories
-----	--	
XTS11 end feed left XTS12 end feed right XTS14 center feed XTS21 straight connector XTS23 flexible connector XTS34 L connector adjustable XTS38 X connector XTS39 T connector inside XTS40 T connector outside XTS41 dead end SKB30 ceiling cup GA70 monopoint kit FTP41 Recessed end cup	1 aluminium 2 black 3 white	XTSV12-1 bending tool SKB12-1 ceiling clamp SKB34 suspension wire 5 feet SKB34/3 suspension wire 9 feet

Ordering example: **XTS11 2**